
GENIUS NAKED

designplan

datasheet

Want to use the Genius but have a non-traditional ceiling? Genius Naked now opens up the possibilities for these interior applications as it can be **installed from above** on surfaces (up to 0.79” thick) such as marble, stone, wood. JA8-2016 Certified and IC rated.


JA8-2016

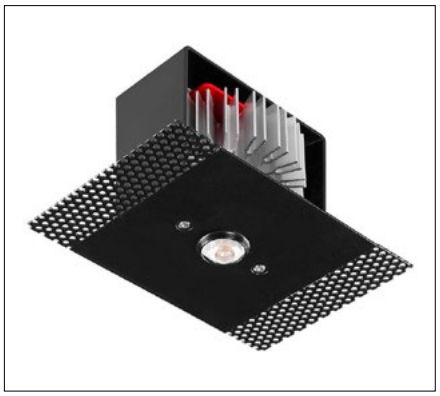

TECHNICAL DATA

Wattage / Input	8.5W (700mA)
Power Supply	Remote, not included. See page 2.
Construction	Steel, Aluminum
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	606 lm (3000K)
Efficacy	71.2 lm/W
Optics	24°, 40°
Finishes	Black
Cut-Out Dimensions	Ø0.87”
Max. Material Thickness	0.79”
Fixture Dimensions	6.46” x 4.25” x h 4.53”
Aperture	Ø0.79”
LED Source	1 COB LED
IP Rating	IP20
JA8	Certified


Ceiling Cut-Out: Ø0.87”
Fixture Dimensions:

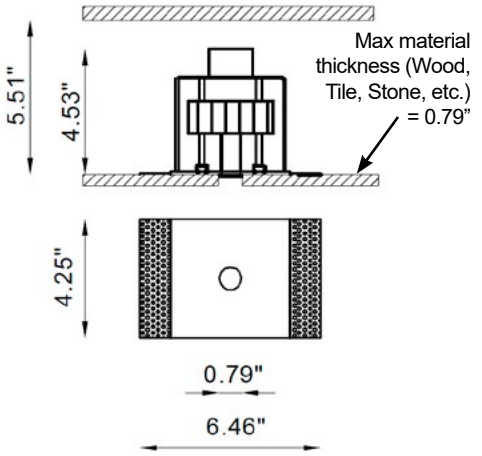

ORDERING INFORMATION

Example: BU1061BL4R40M.27.WD.US. Power Supplies / Accessories ordered separately.

BU1061BL4R		.	.	WD.US
Model No.	**Optics**	**CCT**		
BU1061BL4R	**24M** - 24° **40M** - 40°	**27** - 2700K **30** - 3000K **40** - 4000K		**WD.US**

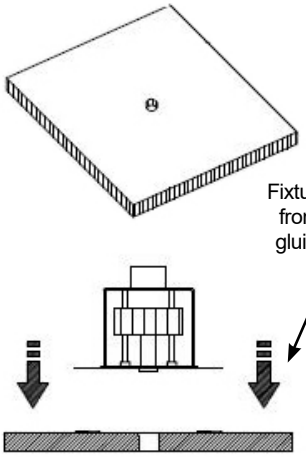

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2019 Designplan Lighting, Inc.

Published: October 26, 2026

P: 908-996-7710
F: 908-996-7042

SUGGESTED POWER SUPPLIES

700mA (Not JA8 Compatible)

Part Number	Description	Input/Output	# of Fixtures
PPLT00498	Phase Dim (120V only)	120VAC to 700mA, 12W, Class 2, DAMP	1 -1

JA8 Compatible *(Also for General Use)*

Part Number	Description	Input/Output	# of Fixtures
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 20W, Class 2, DAMP	1 - 2
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 50W, Class 2, DAMP	1 - 4
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 50W, Class 2	1 - 4

Suggested Lutron Compatible (Not JA8 Compatible)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00515	L3DAE / L3DA3W	L3DA	100%-1%	Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 700mA, 14W	1 -1
PPLT00517	L3DAE / L3DA3W	L3DA	100%-1%	Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 700mA, 27W	2 - 3
PPLT00181	L3DAE / L3DA3W	L3DA	100%-1%	Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 700mA, 38W	3 - 4

For other power supply options consult factory.

ACCESSORIES


Installation





BN1061LT__

Back Box - IC Rated

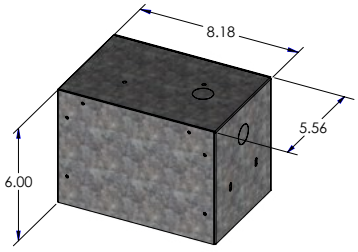

REPLACEMENT BULBS

Example: PPLL00492.US.

Model No.
PPLL00528.US - Replacement Lamps - 2700K, 40°
PPLL00492.US - Replacement Lamps - 3000K, 40°
PPLT00567.US - Replacement Lamps - 3500K, 40°

Job Name/Date:


Fixture Type Designation:

© Copyright 2019 Designplan Lighting, Inc.

PHOTOMETRIC DATA

Note: All photometrics 3000K

Maximum Candela = 1273.7

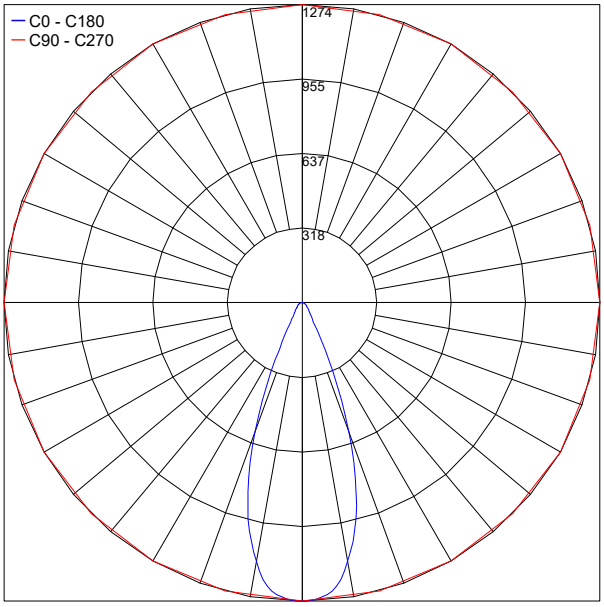

PHOTOMETRIC FILENAME : GENIUS NAKED 8.5W 40° - BU1061.AC.IES

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825

© Copyright 2019 Designplan Lighting, Inc.

Published: October 26, 2026

P: 908-996-7710
F: 908-996-7042