


GENIUS NAKED IP65


Genius Naked IP65 now opens up the possibilities because of its high IP65 protection rating. It can be used indoors OR outdoors and in very damp environments. It is **installed from above** by being glued on surfaces such as wood, cement, mirror and marble with a thickness of from 0.47" (12 mm) to a maximum of 0.79" (20 mm). JA8-2016 Certified.

TECHNICAL DATA

Wattage / Input	8.5W (700mA)
Power Supply	Remote, not included. See page 2.
Construction	Steel, Aluminum
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	606 lm (3000K)
Efficacy	71.3 lm/W
Optics	24°, 40°
Finishes	Black
Max. Material Thickness	0.79"
Fixture Dimensions	6.50" l x 4.33" w x h 4.53" h
Aperture	Ø0.79"
Fixture Weight	1.43 lbs
LED Source	1 COB LED
IP Rating	IP65
JA8	Certified

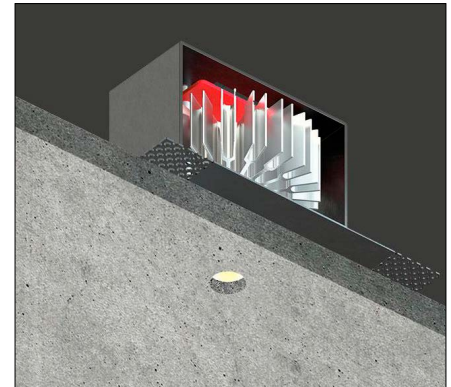


Fixture Dimensions:

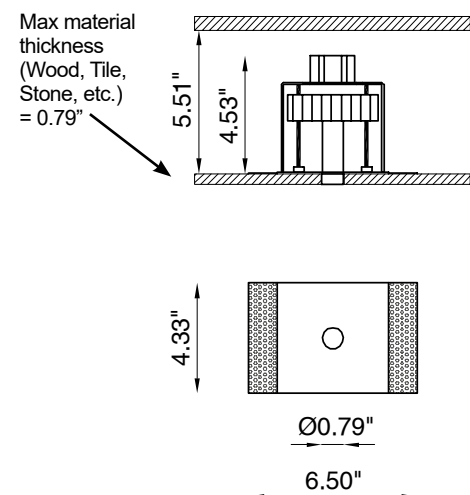


ORDERING INFORMATION

Example: BU2075BL4R40M.30.WD.US. Power Supplies ordered separately.

BU2075BL4R			WD.US
Model No.	Optic	CCT	
BU2075BL4R	24M - 24° 40M - 40°	27 - 2700K 30 - 3000K 40 - 4000K	WD.US



Fixture installed from above by gluing onto the panel.



Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

700mA (Not JA8 Compatible)

Part Number	Description	Input/Output	# of Fixtures
PPLT00498	Phase Dim (120V only)	120VAC to 700mA, 12W, Class 2, DAMP	1 - 1

JA8 Compatible (Also for General Use)

Part Number	Description	Input/Output	# of Fixtures
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 20W, Class 2, DAMP	1 - 2
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 50W, Class 2, DAMP	1 - 4
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 100W, Class 2	1 - 4

Suggested Lutron Compatible (Not JA8 Compatible)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00515	L3DAE / L3DA3W	L3DA	100%-1%	Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 700mA, 14W	1 - 1
PPLT00517	L3DAE / L3DA3W	L3DA	100%-1%	Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 700mA, 27W	2 - 3
PPLT00181	L3DAE / L3DA3W	L3DA	100%-1%	Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 700mA, 38W	3 - 4

For other power supply options consult factory.

REPLACEMENT BULBS

Example: PPLL00492.US.

Model No.

PPLL00528.US - Replacement Lamps - 2700K

PPLL00492.US - Replacement Lamps - 3000K

PPLT00567.US - Replacement Lamps - 3500K

Job Name/Date:

Fixture Type Designation: