



Genius Naked IP65 now opens up the possibilities because of its high IP65 protection rating. It can be used indoors OR outdoors and in very damp environments. It is **installed from above** by being glued on surfaces such as wood, cement, mirror and marble with a thickness of from 0.47" (12 mm) to a maximum of 0.79" (20 mm). JA8-2016 Certified.

## TECHNICAL DATA

<b>Wattage / Input</b>	8.5W (700mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Steel, Aluminum
<b>CCT</b>	3000K (2700K, 4000K on request)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	606 lm (3000K)
<b>Efficacy</b>	71.3 lm/W
<b>Optics</b>	24°, 40°
<b>Finishes</b>	Black
<b>Max. Material Thickness</b>	0.79"
<b>Fixture Dimensions</b>	6.50" l x 4.33" w x h 4.53" h
<b>Aperture</b>	Ø0.79"
<b>Fixture Weight</b>	1.43 lbs
<b>LED Source</b>	1 COB LED
<b>IP Rating</b>	IP65
<b>JA8</b>	Certified

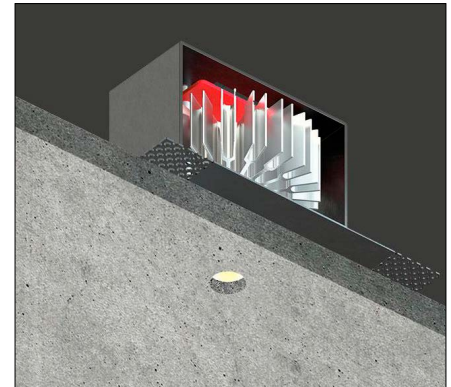


Fixture Dimensions:

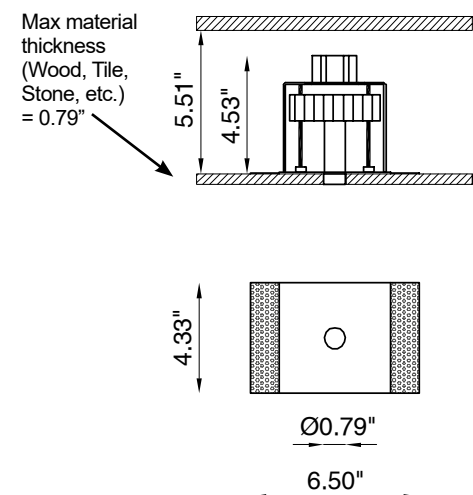


## ORDERING INFORMATION

Example: BU2075BL4R40M.30.WD.US. Power Supplies ordered separately.

BU2075BL4R			WD.US
Model No.	Optic	CCT	
BU2075BL4R	24M - 24° 40M - 40°	27 - 2700K 30 - 3000K 40 - 4000K	WD.US



Fixture installed from above by gluing onto the panel.



Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

700mA (Not JA8 Compatible)

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00498</a>	Phase Dim (120V only)	120VAC to 700mA, 12W, Class 2, DAMP	1 - 1

JA8 Compatible (Also for General Use)

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 700mA, 20W, Class 2, DAMP	1 - 2
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 700mA, 50W, Class 2, DAMP	1 - 4
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1%	120-277VAC to 700mA, 100W, Class 2	1 - 4

Suggested Lutron Compatible (Not JA8 Compatible)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00515</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 700mA, 14W	1 - 1
<a href="#">PPLT00517</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 700mA, 27W	2 - 3
<a href="#">PPLT00181</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 700mA, 38W	3 - 4

For other power supply options consult factory.

## REPLACEMENT BULBS

Example: MBMLXR9SW27JK.US

### Model No.

**MBMLXR9SW27JK.US** - Replacement Lamps - 2700K

**MBMLXR9SW30JK.US** - Replacement Lamps - 3000K

Job Name/Date:

Fixture Type Designation: