


Ghost is a totally disappearing indoor recessed wall luminaire made of AirCoral® that is suitable for installation on plasterboard or brick wall and ceilings. It is available in 3000K as standard with a 120° optic.



TECHNICAL DATA

Wattage / Input	3.5W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: AirCoral®
CCT	2700K, 3000K (4000K on request)
CRI	>90
Delivered Lumens	194 lm (3000K)
Efficacy	55.3 lm/W
Optics	120°
Finishes	AirCoral® - suitable for painting
Fixture Dimensions	2.95" w x 5.91" l x 18.90" h
Cut-out Dimension	6.30" x 19.29"
Aperature	3.54" x 13.78"
Fixture Weight	6.61 lbs
IP Rating	IP40

Fixture Dimensions

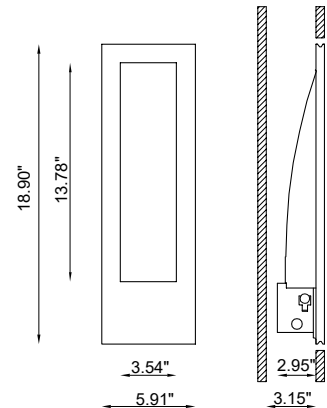

The body is made of AirCoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for AirCoral® calculator.

- Additionally, AirCoral® is:
- Antibacterial.
 - Antifungal.
 - Scratch-resistant.
 - Dust-resistant.
 - Suitable for painting.
 - LEED recognized material.

ORDERING INFORMATION

Example: BU6333.30.AC.US. Power Supplies ordered separately.

BU6333		AC	US
Model No.	CCT	Finish	
BU6333	27 - 2700K 30 - 3000K (4000K on request)	AC - AirCoral®	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00138	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	1-1
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	1-2
PPLT00480-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2	1-4
PPLT00168-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-8
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-20

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-3
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	4-4

For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 408

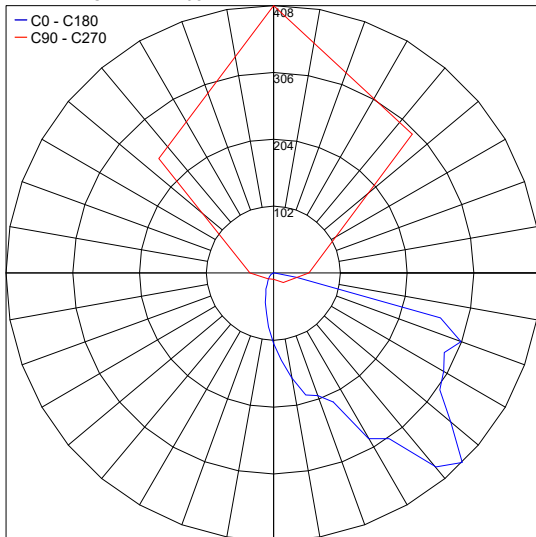

Job Name/Date:

Fixture Type Designation: