


The Ginko series IP66, IP69 projectors are small and versatile. Available in a variety of finishes, optics (some models have integral adjustable optics), and 80 or 90 CRI. Ginko 1.0 is the Ø1.3" static white version.

TECHNICAL DATA

Wattage / Input	2.5W, 3.5W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anti-corrosive aluminum alloy or 316L SS Bracket: 316L SS Lens: Tempered extra-clear glass
CCT	2700K, 3000K, 4000K <i>(3500K on request, consult factory)</i>
CRI	CRI >80, 90 <i>Note: 12° is 4000K, CRI 80 only</i>
Delivered Lumens	See Delivered Lumens Chart
Efficacy	50-58 lm/W (2.5W), 47-55 lm/W (3.5W)
Optics	7 Standard (see below)
Finishes	7 Standard, Custom RAL (see below)
Fixture Dimensions	Ø1.34" x 1.93" x 1.77" h (<i>max 3.58" h fully extended</i>), 0.79" wide bracket
Fixture Weight	0.29 lbs
LED Source	1 Power LED
Lumen Maintenance	L90, B10 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	-4°F to +113°F
IP Rating	IP66, IP69
Impact Rating	IK07



Fixture Dimensions

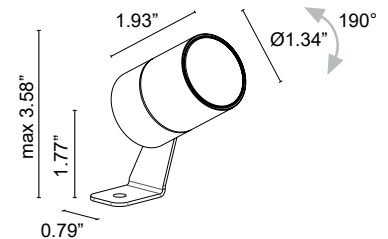

Delivered Lumens (3000K, 19°)	2.5W	3.5W
CRI 80	146 lm	193 lm
CRI 90	124 lm	164 lm

ORDERING INFORMATION

Example: GN100115SE or GN100115SE-2. Accessories / Power Supplies ordered separately.

GN100						
Model No.	Wattage	CRI	CCT	Optics	Finish	Cable Length
GN100	0 - 2.5W 1 - 3.5W	0 - CRI 80 1 - CRI 90	F - 2700K 5 - 3000K 9 - 4000K*	T - 12° (4000K at CRI80 only) S - 19° M - 36° U - 38° sharp Q - 58° W- 16° v x 36° h X - 36° v x 16° h	I - Stainless Steel E - White N - Black Anodized F - Grey H - Anthracite T - Cor-ten 5 - Jasper Green C - Custom RAL <i>(consult factory for "C")</i>	4.92' standard 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

2.5W - 24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-3
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-8
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-19
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-30
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-32
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	4-32

SUGGESTED POWER SUPPLIES

3.5W - 24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-2
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2	1-5
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-13
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-21
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-22
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	3-22

For other power supply options consult factory.

ACCESSORIES

Installation



WP0100
Ground Spike
(Length 10.12")



WP1004
Fastener Strap
(Length 16.4')




WF3302
Cable Protection Sheath
(Length 7.0")

Additional Cable Lengths
Consult factory

Job Name/Date:

Fixture Type Designation:

ACCESSORIES Anti-Glare



WH8001
Honeycomb Louvre
Not available for Sharp Optics.



WB8011__
Standard Snoot



WB8021__
Asymmetric Snoot

For Snoots include one of the below finishes:

- E** - White
- N** - Black anodized
- F** - Gray
- H** - Anthracite
- T** - Cor-ten
- 5** - Jasper Green
- C** - Custom RAL


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K, CRI 80


T - 12° CRI 80

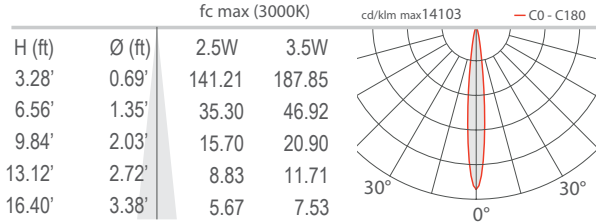


S - 19° CRI 80

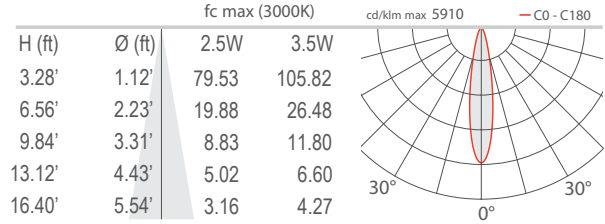


M - 36° CRI 80

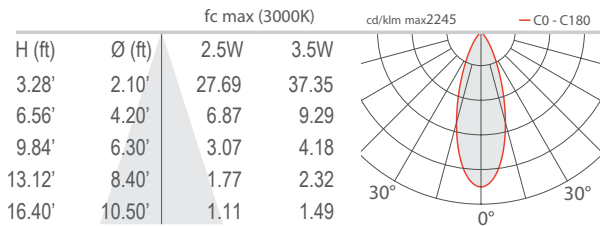


U - 38° Sharp CRI 80

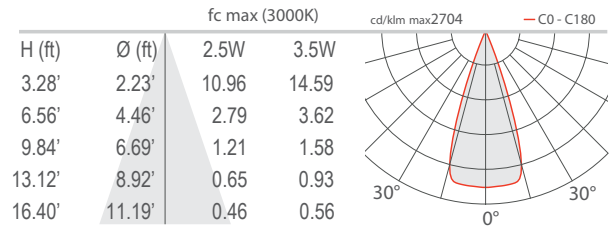


Q - 58° CRI 80

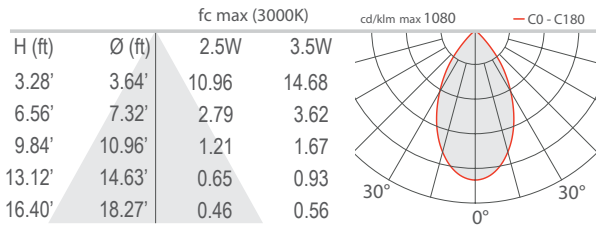

W - 16° x 36° CRI 80

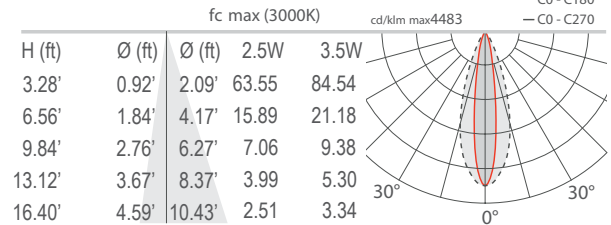


X - 36° x 16° CRI 80

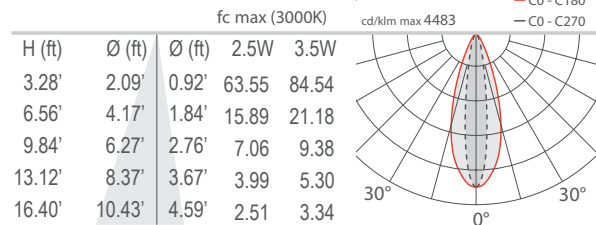

X - 36°x16°



W - 16°x36°



Job Name/Date:

Fixture Type Designation: