

GINKO 2.2


The Ginko series IP66, IP69 projectors are small and versatile. Available in a wide variety of finishes and optics. Ginko 2.2 is the Ø2.1" RGB model of the series.

TECHNICAL DATA

| | |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Wattage / Input | 5W (500mA) |
| Power Supply | Remote, not included. See page 2. |
| Construction | Body: Anti-corrosive Aluminum Alloy or 316L SS Bracket: 316L SS Lens: Tempered extra-clear glass Cable Length: 4.9' standard |
| CCT | RGB |
| CRI | N/A |
| BUG Rating | B0-U0-G0 |
| Delivered Lumens | 191 lm: (R) 70 lm, (G) 90 lm, (B) 31 lm |
| Efficacy | 38 lm/W |
| Optics | 5 Standard (see below) |
| Finishes | 7 Standard, Custom RAL (see below) |
| Fixture Dimensions | Ø2.13" x 2.28" x 2.17" h (max 4.21" h fully extended), 0.96" wide bracket |
| Fixture Weight | 0.84 lbs |
| LED Source | 3 Power LEDs |
| Lumen Maintenance | L90,B10 >50,000hrs (Ta 25°C) |
| Color Consistency | N/A |
| Operating Temp. | -4°F to +113°F |
| IP Rating | IP66, IP69 |
| Impact Rating | IK07 |



Fixture Dimensions

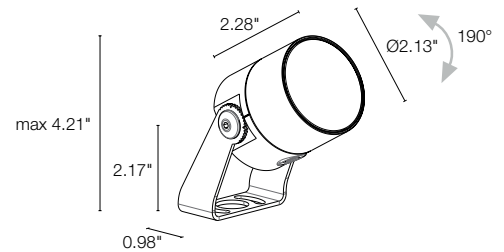

ORDERING INFORMATION

Example: GN22326ME or GN22326ME-2. Accessories / Power Supplies ordered separately.

| GN223 | 2 | 6 | | | - | |
|-----------|---------|---------|-------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|------------------------------------------------------------------------|
| Model No. | Wattage | CCT | Optics | Finish | | Cable Length |
| GN223 | 2 - 5W | 6 - RGB | S - 20° M - 34° L - 45° W - 21° v x 42° h X - 42° v x 21° h | I - Stainless Steel E - White N - Black Anodized F - Gray H - Anthracite T - Cor-ten 5 - Jasper Green C - Custom RAL (consult factory for "C") | | 4.92' standard 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62' |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

5W - 500mA

| Part Number | Description | Input/Output | # of Fixtures |
|-----------------------------|-------------|------------------------------------|---------------|
| PPLT00244-P | DMX / RDM | 120-277VAC to 500mA, 50W, Class 2 | 2-7 |
| PPLT00129-P | DMX / RDM | 120-277VAC to 500mA, 100W, Class 2 | 1-12 |

For other power supply options consult factory.

ACCESSORIES

Installation



WP0100
Ground Spike
(Length 10.12")



WP1006__ (Length 19.69")
WP1007__ (Length 31.50")
Ground Spike with Bracket
Include one of the below finishes:
I - Stainless Steel
E - White
N - Black anodized
F - Gray
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL




WP1004
Fastener Strap
(Length 16.4')

Additional Cable Lengths
Consult factory



WF3301
Cable Protection Sheath
(Length 6.0")

Anti-Glare



WH0201
Honeycomb Louvre
Not available for Sharp Optics.



WB8012__
Standard Snoot
For Snoots include one of the below finishes:
E - White
N - Black anodized
F - Gray
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL



WB8022__
Asymmetric Snoot


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is for color mixed white


S - 20°

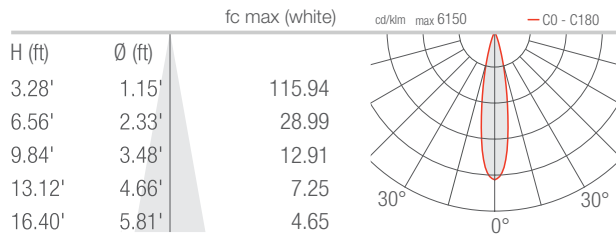


M - 34°

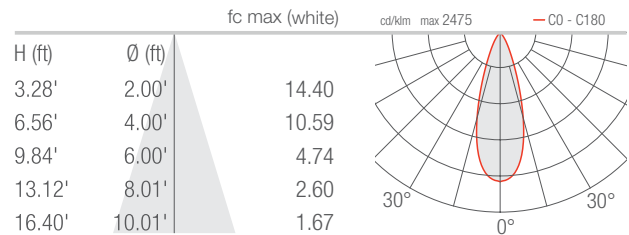


L - 45°

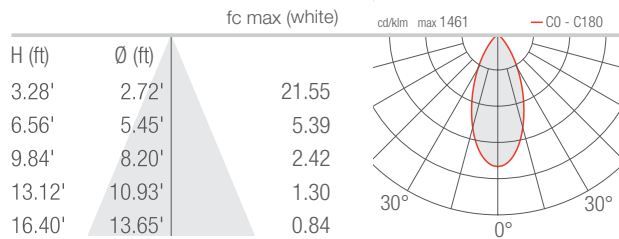

W - 21°x42°

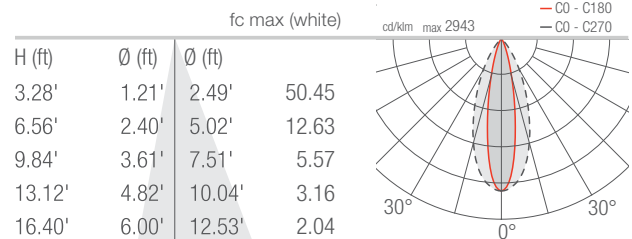

X - 42°x21°

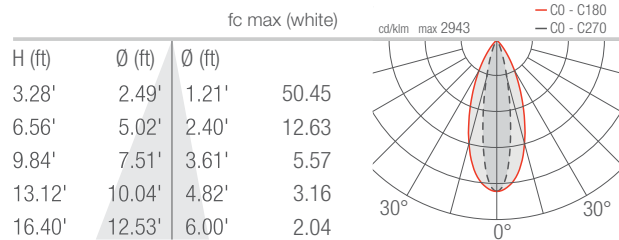

Job Name/Date:

Fixture Type Designation: