

GINKO 2.2


The Ginko series IP66, IP69 projectors are small and versatile. Available in a wide variety of finishes and optics. Ginko 2.2 is the Ø2.1" RGB model of the series.



TECHNICAL DATA

Wattage / Input	5W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anti-corrosive Aluminum Alloy or 316L SS Bracket: 316L SS Lens: Tempered extra-clear glass Cable Length: 4.9' standard
CCT	RGB
CRI	N/A
BUG Rating	B0-U0-G0
Delivered Lumens	191 lm: (R) 70 lm, (G) 90 lm, (B) 31 lm
Efficacy	38 lm/W
Optics	5 Standard (see below)
Finishes	7 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø2.13" x 2.28" x 2.17" h (max 4.21" h fully extended), 0.96" wide bracket
Fixture Weight	0.84 lbs
LED Source	3 Power LEDs
Lumen Maintenance	L90,B10 >50,000hrs (Ta 25°C)
Color Consistency	N/A
Operating Temp.	-4°F to +113°F
IP Rating	IP66, IP69
Impact Rating	IK07

Fixture Dimensions

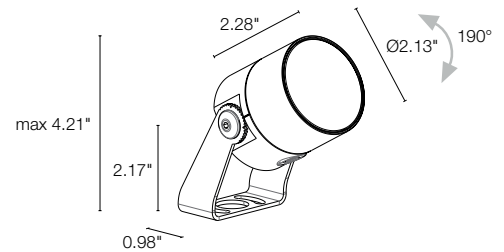

ORDERING INFORMATION

Example: GN22326ME or GN22326ME-2. Accessories / Power Supplies ordered separately.

GN223	2	6			-	
Model No.	Wattage	CCT	Optics	Finish	Cable Length	
GN223	2 - 5W	6 - RGB	S - 20° M - 34° L - 45° W - 21° v x 42° h X - 42° v x 21° h	I - Stainless Steel E - White N - Black Anodized F - Gray H - Anthracite T - Cor-ten 5 - Jasper Green C - Custom RAL (consult factory for "C")	4.92' standard	1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

5W - 500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00244-P	DMX / RDM	120-277VAC to 500mA, 50W, Class 2	2-7
PPLT00129-P	DMX / RDM	120-277VAC to 500mA, 100W, Class 2	1-12

For other power supply options consult factory.

ACCESSORIES

Installation



WP0100
Ground Spike
(Length 10.12")



WP1006__ (Length 19.69")
WP1007__ (Length 31.50")
Ground Spike with Bracket
Include one of the below finishes:
I - Stainless Steel
E - White
N - Black anodized
F - Gray
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL




WP1004
Fastener Strap
(Length 16.4')

Additional Cable Lengths
Consult factory



WF3301
Cable Protection Sheath
(Length 6.0")

Anti-Glare



WH0201
Honeycomb Louvre
Not available for Sharp Optics.



WB8012__
Standard Snoot
For Snoots include one of the below finishes:
E - White
N - Black anodized
F - Gray
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL



WB8022__
Asymmetric Snoot


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is for color mixed white


S - 20°

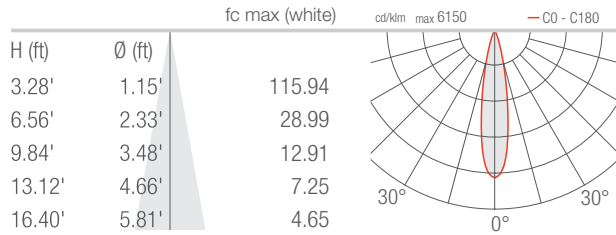


M - 34°

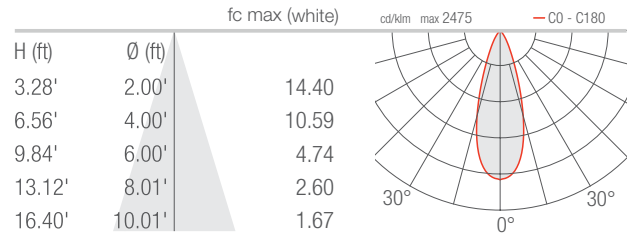


L - 45°

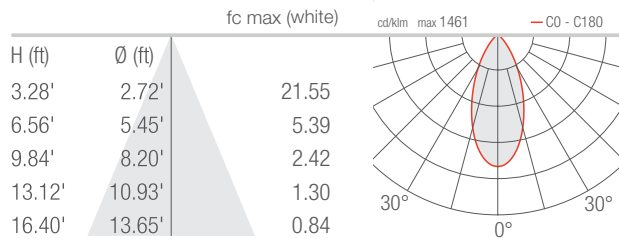

W - 21°x42°

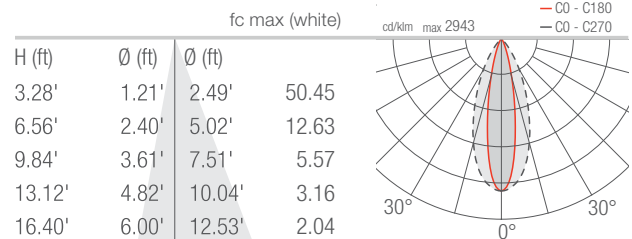

X - 42°x21°

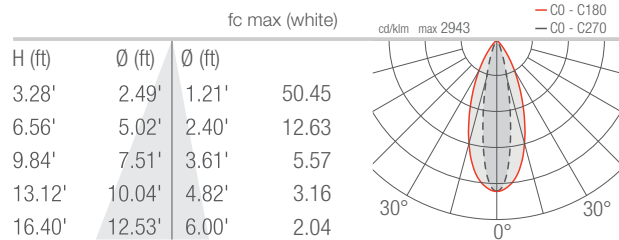

Job Name/Date:

Fixture Type Designation: