


The Ginko series IP66, IP69 projectors are small, versatile outdoor floodlights. Available in a variety of finishes, optics and 80 or 90 CRI. Ginko 2.4 is a Ø2.1" IP66 version with a manual zoom lens with an optical range of 9°-36°.

## TECHNICAL DATA

|                           |                                                                                                                              |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------|
| <b>Wattage / Input</b>    | 7W (24VDC)                                                                                                                   |
| <b>Power Supply</b>       | Remote, not included. See page 2.                                                                                            |
| <b>Construction</b>       | Body: Anti-corrosive aluminum alloy<br>Bracket: 316L SS<br>Lens: Tempered extra-clear glass<br>Neoprene Cable: 4.9' standard |
| <b>CCT</b>                | 2700K, 3000K, 4000K<br>(3500K on request, consult factory)                                                                   |
| <b>CRI</b>                | 80, >90                                                                                                                      |
| <b>BUG Rating</b>         | B0-U0-G0 (3000K)                                                                                                             |
| <b>Delivered Lumens</b>   | 122 lm (CRI 80), 113 lm (CRI>90) (3000K, 36°)                                                                                |
| <b>Efficacy</b>           | 17.4 lm/W (CRI 80), 16.1 lm/W (CRI>90)                                                                                       |
| <b>Optics</b>             | Adjustable 9°- 36° Optics                                                                                                    |
| <b>Finishes</b>           | 6 Standard, Custom RAL (see below)<br>(4 Stage Marine Grade Finish)                                                          |
| <b>Fixture Dimensions</b> | Ø2.13" x 3.27" x 2.17" h (max 4.92" h fully extended), 0.98" wide bracket                                                    |
| <b>Fixture Weight</b>     | 0.99 lbs                                                                                                                     |
| <b>LED Source</b>         | 1 High Intensity Power LED                                                                                                   |
| <b>Lumen Maintenance</b>  | L90, B10 >50,000hrs (Ta 25°C)                                                                                                |
| <b>Color Consistency</b>  | 3-Step MacAdam                                                                                                               |
| <b>Operating Temp.</b>    | -4°F to +113°F                                                                                                               |
| <b>IP Rating</b>          | IP66                                                                                                                         |
| <b>Impact Rating</b>      | IK07                                                                                                                         |



Fixture Dimensions

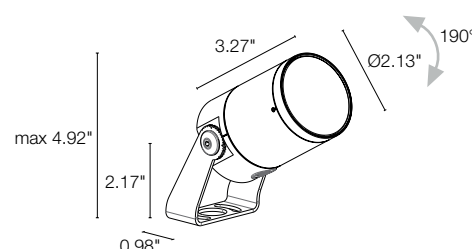

## ORDERING INFORMATION

Example: GN24010FR1E or GN24010FR1E-1. Accessories / Power Supplies ordered separately.

| GN240     | 1       |                          |                                     | R1            |                                                                                                                                                 | -                                                        |  |
|-----------|---------|--------------------------|-------------------------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|--|
| Model No. | Wattage | CRI                      | CCT                                 | Optics        | Finish                                                                                                                                          | Cable Length                                             |  |
| GN240     | 1 - 7W  | 0 - CRI 80<br>1 - CRI>90 | F - 2700K<br>5 - 3000K<br>9 - 4000K | R1 - 9° - 36° | E - White<br>N - Black Anodized<br>F - Gray<br>H - Anthracite<br>T - Cor-ten<br>5 - Jasper Green<br>C - Custom RAL<br>(consult factory for "C") | 4.92' standard<br>1 - 16.40'<br>2 - 32.81'<br>4 - 65.62' |  |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

7W - 24VDC

| Part Number               | Description                                             | Input/Output                       | # of Fixtures |
|---------------------------|---------------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00284</a> | Non-Dim                                                 | 120-277VAC to 24VDC, 100W, Class 2 | 1-11          |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 2-11          |

## Suggested Lutron Compatible

| Part Number               | Option       | Lutron SKU | Dim Range | Description                                   | Input/Output                      | # of Fixtures |
|---------------------------|--------------|------------|-----------|-----------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00530</a> | L3DAE / L3D0 | L3DA/L3D0  | 100%-1%   | Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-10          |

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

| Part Number               | Description                         | Input/Output                                | # of Fixtures |
|---------------------------|-------------------------------------|---------------------------------------------|---------------|
| <a href="#">PPLT00715</a> | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-10          |

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Installation



**WP0100**  
Ground Spike  
(Length 10.12")



**WP1006**\_\_ (Length 19.69")  
**WP1007**\_\_ (Length 31.50")  
Ground Spike with Bracket  
Include one of the below finishes:  
**I** - Stainless Steel  
**E** - White  
**N** - Black anodized  
**F** - Gray  
**H** - Anthracite  
**T** - Cor-ten  
**5** - Jasper Green  
**C** - Custom RAL



**WP1004**  
Fastener Strap  
(Length 16.4")




**WF3301**  
Cable Protection Sheath  
(Length 6.0")


## PHOTOMETRIC DATA

Note all Photometry is 3000K, CRI 80

### R1 - 7° (7°–60°) CRI 80

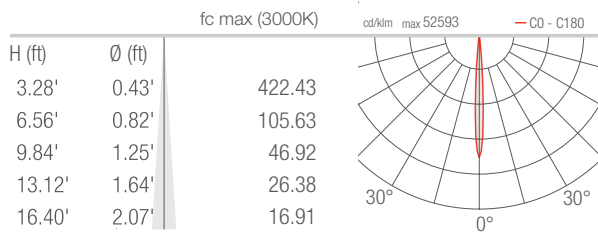

### R1 - 60° (7°–60°) CRI 80

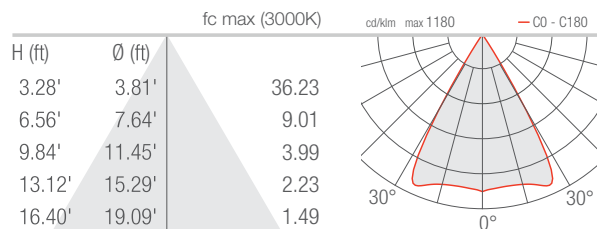

Job Name/Date:

Fixture Type Designation: