


The Ginko series IP66 / IP69 projectors are small and versatile. Available in a variety of finishes, optics (some models have integral adjustable optics), and 80 or 90 CRI. Ginko 3.4 is Ø3.3", IP66, static white version.



## TECHNICAL DATA

<b>Wattage / Input</b>	15W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Anti-corrosive aluminum alloy Bracket: 316L SS Lens: Tempered extra-clear glass Neoprene Cable: 4.9' standard
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80, 90
<b>Delivered Lumens</b>	See Delivered Lumens Chart
<b>Efficacy</b>	16-20 lm/W (38°), 17-21 lm/W (35° x 71°)
<b>Optics</b>	2 Internal Adjustable Optic Options (see below)
<b>Finishes</b>	6 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
<b>Fixture Dimensions</b>	Ø3.31" x 5.39" x 2.95" h (max 7.99" h fully extended), 1.22" wide bracket
<b>Fixture Weight</b>	3.31 lbs
<b>LED Source</b>	1 High-Power Density COB LED
<b>Lumen Maintenance</b>	L95,B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	2-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK09

Fixture Dimensions

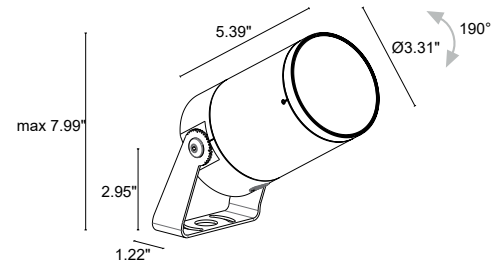

<b>Delivered Lumens (3000K)</b>	<b>38°</b>	<b>36° x 70°</b>
<b>CRI 80</b>	295 lm	315 lm
<b>CRI 90</b>	240 lm	255 lm

## ORDERING INFORMATION

Example: GN34010FR2N or GN34010FR2N-2. Accessories / Power Supplies ordered separately.

GN340	1					-	
Model No.	Wattage	CRI	CCT	Optics	Finish	Cable Length	
GN340	1 - 15W	0 - CRI 80 1 - CRI 90	F - 2700K 5 - 3000K 9 - 4000K	R1 - 8° - 38° R2 - 8° v x 66° h - 36° v x 70° h adj.	E - White N - Black Anodized F - Gray H - Anthracite T - Corten 5 - Jasper Green C - Custom RAL (consult factory for "C")	4.92' standard 1 - 16.40' 2 - 32.81' 4 - 65.62'	

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

15W - 24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-5
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-5

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-5

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-5

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Installation



**WP0100**  
Ground Spike  
(Length 10.12")



**WP1006\_\_** (Length 19.69")  
**WP1007\_\_** (Length 31.50")  
Ground Spike with Bracket  
*Include one of the below finishes:*  
I - Stainless Steel  
E - White  
N - Black anodized  
F - Gray  
H - Anthracite  
T - Cor-ten  
5 - Jasper Green  
C - Custom RAL




**WP1004**  
Fastener Strap  
(Length 16.4')

### Optical



**WE0201**  
Magnet for rotating optics




Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Note all Photometry is 3000K, CRI 80


### R1 - 8° (8°-38°) CRI 80

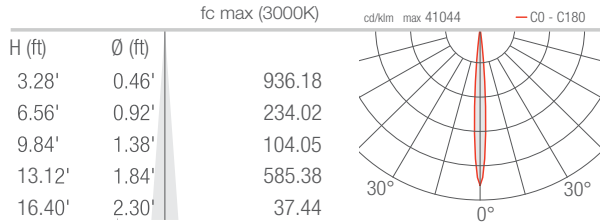


### R1 - 38° (8°-38°) CRI 80

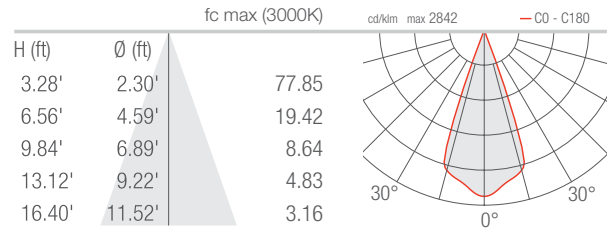



### R2 - 8°x66° (8°x66°-35°x71°) CRI 80

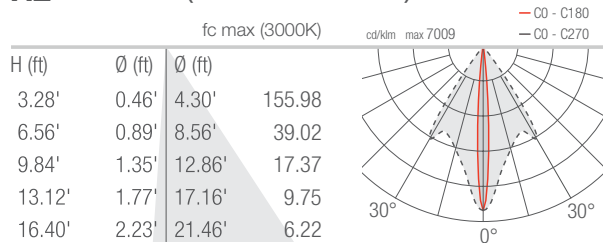

### R2 - 35°x71° (8°x66°-35°x71°) CRI 80

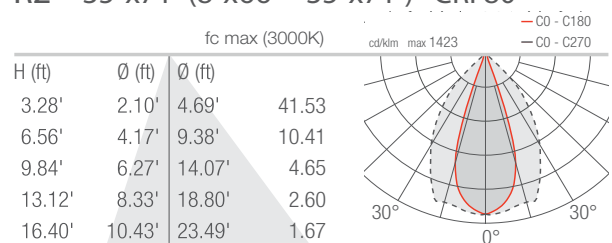

## ZOOM ADJUSTMENT

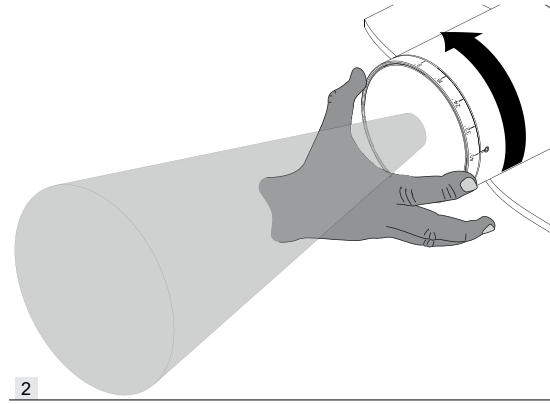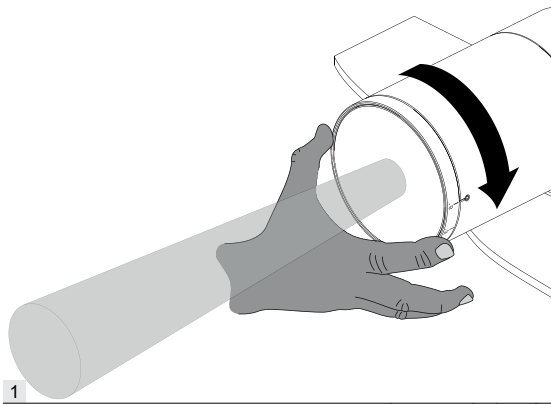

Job Name/Date:

Fixture Type Designation: