


The Ginko series IP66, IP69 projectors are small and versatile. Available in a variety of finishes, optics (some models have integral adjustable optics), and 80 or 90 CRI. Ginko 4.0 is the Ø4.3", IP69, static white version.



## TECHNICAL DATA

<b>Wattage / Input</b>	25W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Anti-corrosive Aluminum Alloy Bracket: 316L Stainless Steel Lens: Tempered Extra-clear Glass Neoprene Cable: 4.9' standard length
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	80, >90
<b>Delivered Lumens</b>	2133 lm (3000K, 12°, CRI 80)
<b>Efficacy</b>	85.3 lm/W
<b>Optics</b>	7 Standard (see below)
<b>Finishes</b>	6 Standard, Custom RAL (see below)
<b>Fixture Dimensions</b>	Ø4.29" x 4.33" x 4.13" h (max 8.46" h fully extended), 1.57" wide bracket
<b>Fixture Weight</b>	4.63 lbs
<b>LED Source</b>	1 High-Power Density COB LED
<b>Lumen Maintenance</b>	L95,B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	2-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66, IP69 (Tested to EN / IEC 60598-1)
<b>Impact Rating</b>	IK08

Fixture Dimensions

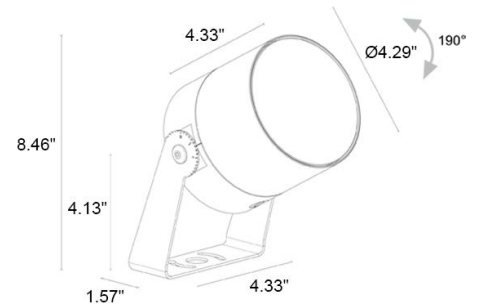

## ORDERING INFORMATION

Example: GN400015SE or GN400015SE-1. Accessories / Power Supplies ordered separately.

GN400	0					
Model No.	Wattage	CRI	CCT	Optics	Finish	Cable Length
GN400	0 - 25W	0 - CRI 80 1 - CRI 90	F - 2700K 5 - 3000K 9 - 4000K	S - 12° M - 26° L - 34° P - 38° sharp J - 55° W - 13° v x 65° h adj. X - 24° v x 69° h adj.	E - White N - Black Anodized F - Gray H - Anthracite T - Corten 5 - Jasper Green C - Custom RAL (consult factory for "C")	4.92' standard 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

25W - 24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00157</a>	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-1
<a href="#">PPLT00090</a>	Non-Dim	120VAC to 24VDC, 75W, Class 2	1-2
<a href="#">PPLT00599</a>	ELV / TRIAC & 0-10V Dimming (100-0%)	120-277VAC to 24VDC, 100W, Class 2	1-3
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-3
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-3

For other power supply options consult factory.

## ACCESSORIES - Installation




**WP0300**  
In-Ground Spike  
(Length 15.6")


## Optical



**WE0201**  
Magnet for adjustable  
optics and zoom lens



## ACCESSORIES - Anti-Glare



**Honeycomb Louver**  
Built into the fixture

Available on all optics,  
**EXCEPT** for 38° sharp,  
13°x65°, 24°x69° optics



**WB1101\_\_**  
Standard Snout  
Include one of the below finishes:

- E** - White
- N** - Black anodized
- F** - Gray
- H** - Anthracite
- T** - Cor-ten
- 5** - Jasper Green
- C** - Custom RAL



**WB1102\_\_**  
Asymmetrical Snout  
Include one of the below finishes:

- E** - White
- N** - Black anodized
- F** - Gray
- H** - Anthracite
- T** - Cor-ten
- 5** - Jasper Green
- C** - Custom RAL


Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Note all Photometry is 3000K, CRI 80


### S - 12° CRI80

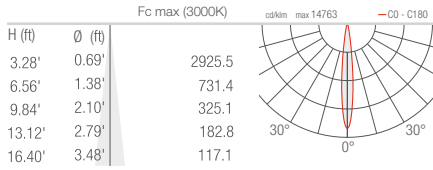


### M - 26° CRI 80

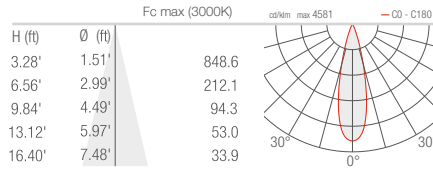


### L - 34° CRI 80

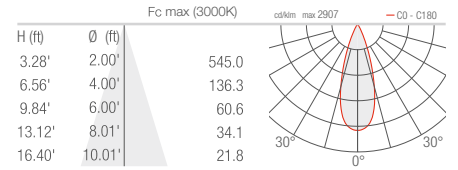


### P - 38° sharp CRI 80

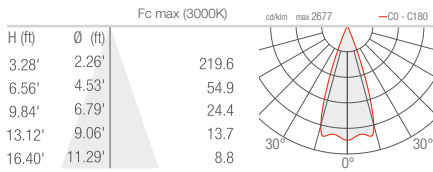



### J - 55° CRI 80

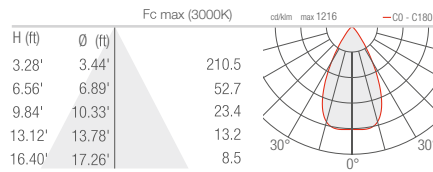

### W - 13°x65° adjustable CRI 80

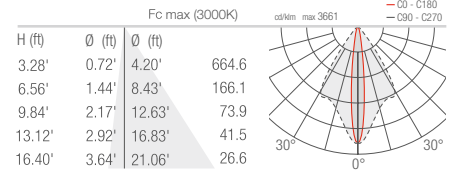

### X - 24°x69° adjustable CRI 80

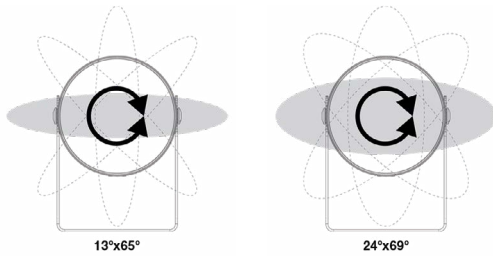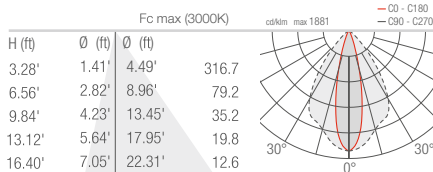

Job Name/Date:

Fixture Type Designation: