

Globe is a totally disappearing circular indoor recessed luminaire made of AirCoral® that creates a luminous circle with precise aim. It is suitable for installation on plasterboard or brick walls and ceilings. It has a 3000K standard color temperature with a 120° optic.



TECHNICAL DATA


Wattage / Input	6.5W (120VAC)
Power Supply	Integral
Construction	Body: AirCoral®
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	810 lm (3000K)
Efficacy	124.6 lm/W
Optics	120°
Finishes	AirCoral® - suitable for painting
Fixture Dimensions	13.58" l x 4.33" w x 12.99" h
Cut-out Dimension	13.78" x 13.39"
Aperature	Ø7.87"
Fixture Weight	13.23 lbs
IP Rating	IP40

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.


Additionally, Aircoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

Fixture Dimensions

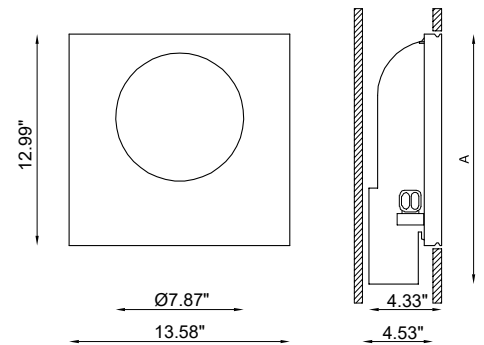

Mounting Orientations

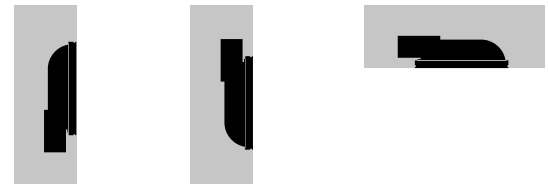

6.5W - LED

6.5W - LED

6.5W - LED

ORDERING INFORMATION

Example: BU6289.AC.US. Power Supplies ordered separately.

BU6289	AC	US
Model No.	Finish	
BU6289	AC - AirCoral®	US


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 157.2

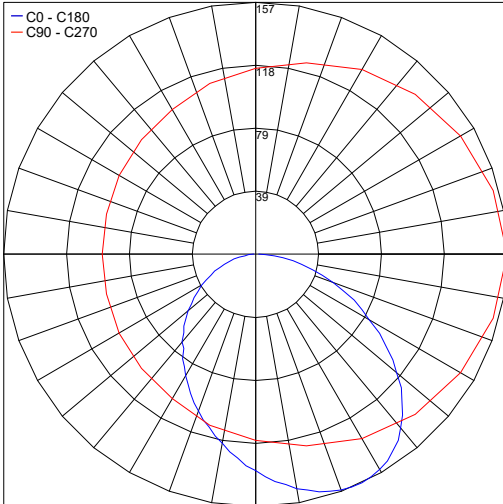

PHOTOMETRIC FILENAME : GLOBE BU6289.AC 6.5W 3000K.IES

Job Name/Date:

Fixture Type Designation: