

HELAX 70 HALOLED

TORSION


Helax 70 Haloled Torsion is a round recessed LED downlight suitable for indoor installation on ceilings. It is available in 2 static white temperatures, and textured white or black standard finishes.



TECHNICAL DATA

Wattage / Input	7.8W (700mA)
Power Supply	Remote, not included. See page 2.
CCT	2700K, 3000K (4000K on request)
CRI	>90
Delivered Lumens	617 lm (3000K)
Efficacy	79.1 lm/W (3000K)
Optics	36°
Finishes	Textured White, Textured Black
LED Source	LUXEON M LED
Fixture Dimensions	Ø3.07" x 3.15"
Cutout Dimensions	Ø2.76"
Installation Depth	3.35"
Fixture Weight	0.44 lbs
IP Rating	IP20 (IP54 version available)

Fixture Dimensions

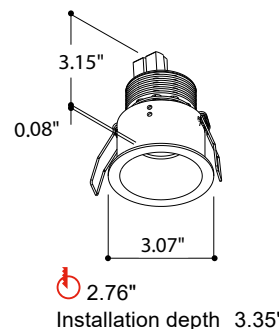

ORDERING INFORMATION

Example: T248026. Power Supplies / Accessories ordered separately.

Model No.	Description
T248017	Helax 70 Haloled Torsion, 2700K, Textured White
T248016	Helax 70 Haloled Torsion, 2700K, Textured Black
T248027	Helax 70 Haloled Torsion, 3000K, Textured White
T248026	Helax 70 Haloled Torsion, 3000K, Textured Black

Job Name/Date:

Fixture Type Designation:

HELAX 70 HALOLED

TORSION

SUGGESTED POWER SUPPLIES

Consult Factory for Power Supply Options

ACCESSORIES - Installation


T498100

Installation Frame for Plaster

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 1117.7

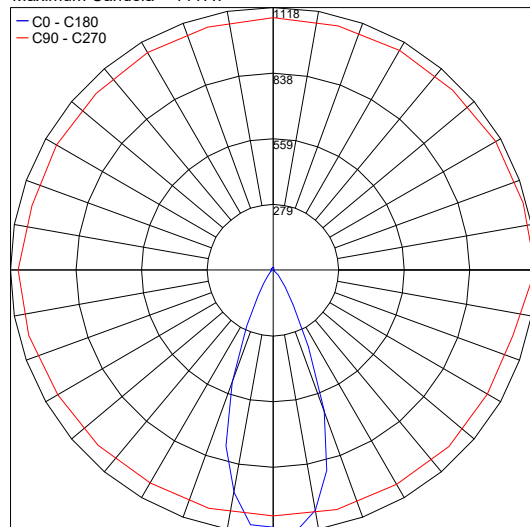

PHOTOMETRIC FILENAME : HELAX 70 HALOLED TORSION.IES

Job Name/Date:

Fixture Type Designation: