

HELAX SML OUT

LEAF / TORSION


Helax SML Out is a round, recessed LED downlight suitable for outdoor installation on ceilings and available with an ingress protection of IP65. It comes in 2 static white temperatures, and textured white or black standard finishes.




TECHNICAL DATA

Wattage / Input	3.8W (350mA)
Power Supply	Remote, not included. See page 2.
CCT	2700K, 3000K (4000K on request)
CRI	>90
BUG Rating	B1-U0-G0
Delivered Lumens	450 lm (3000K)
Efficacy	118.4 lm/W (3000K)
Optics	15°, 36°, 50°
Finishes	Textured White, Textured Black
LED Source	BRIDGELUX LED
Fixture Dimensions	Ø2.52" x 2.48" Torsion Ø2.52" x 2.09" Leaf
Cutout Dimensions	Ø2.17" - Installation Depth 2.56" (Torsion) Ø2.20" Solid - Install Depth 2.76" (Leaf) Ø2.17" Hollow - Install Depth 2.17" (Leaf)
Fixture Weight	0.44 lbs
IP Rating	IP65

Fixture Dimensions



TORSION



LEAF

ORDERING INFORMATION

Example: T178626M-50. Power Supplies ordered separately.

	-	
--	---	--

Model No.	Description	Optics
T178626	Helax SML Torsion, 2700K, Textured Black, IP65	N - 15°
T178647	Helax SML Torsion, 2700K, Textured White, IP65	M - 36
T178636	Helax SML Torsion, 3000K, Textured Black, IP65	W - 50°
T178657	Helax SML Torsion, 3000K, Textured White, IP65	
T178526	Helax SML Leaf, 2700K, Textured Black, IP65	
T178547	Helax SML Leaf, 2700K, Textured White, IP65	
T178536	Helax SML Leaf, 3000K, Textured Black, IP65	
T178557	Helax SML Leaf, 3000K, Textured White, IP65	

Job Name/Date:

Fixture Type Designation:

HELAX SML OUT

LEAF / TORSION

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00211	Non-Dim	120-277VAC to 350mA, 4W, Class 2	1-2
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-2
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-2
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	3-4




For other power supply options consult factory.

SUGGESTED POWER SUPPLIES

250mA - For Dim to Warm version - Consult Factory

PHOTOMETRIC DATA

Note all Photometry is 3000K

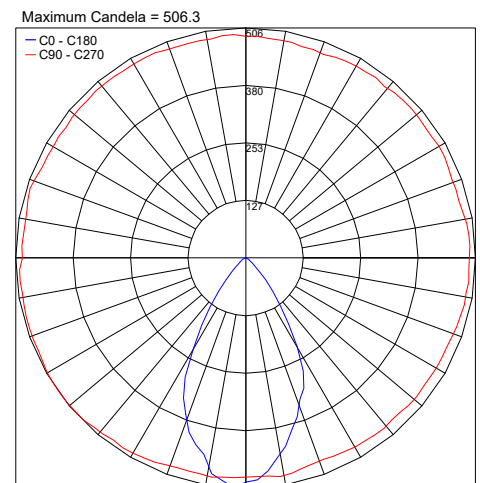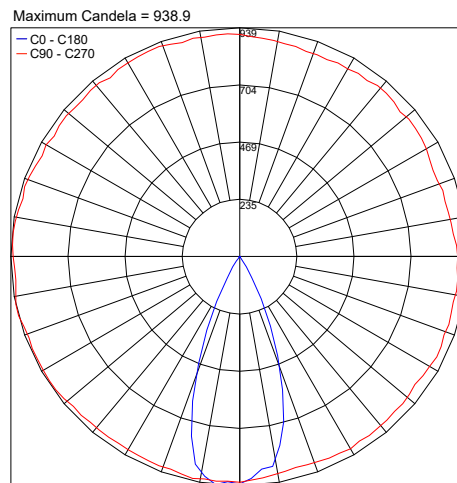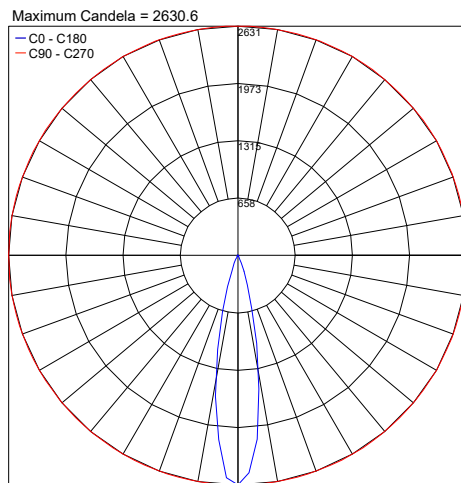

Job Name/Date:

Fixture Type Designation: