

# HELAX SML

## TORSION


Helax SML is a round recessed LED downlight suitable for indoor installation on ceilings. It is available in 2 static white temperatures, and textured white or black standard finishes.



### TECHNICAL DATA

<b>Wattage / Input</b>	3.8W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>CCT</b>	2700K, 3000K (4000K on request)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	342 lm (3000K)
<b>Efficacy</b>	90 lm/W (3000K)
<b>Optics</b>	36°
<b>Finishes</b>	Textured White, Textured Black
<b>LED Source</b>	LUXEON M LED
<b>Fixture Dimensions</b>	Ø2.52" x 2.48" Torsion
<b>Cutout Dimensions</b>	Ø2.17"
<b>Installation Depth</b>	2.56" (Torsion)
<b>Fixture Weight</b>	0.44 lbs
<b>IP Rating</b>	IP20

Fixture Dimensions



TORSION

### ORDERING INFORMATION

Example: T178426. Power Supplies / Accessories ordered separately.

Model No.	Description
T178447	Helax SML Torsion, 2700K, Textured White
T178426	Helax SML Torsion, 2700K, Textured Black
T178457	Helax SML Torsion, 3000K, Textured White
T178436	Helax SML Torsion, 3000K, Textured Black

Job Name/Date:

Fixture Type Designation:

### SUGGESTED POWER SUPPLIES

350mA


Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2	1-2
<a href="#">PPLT00496</a>	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	1-2

For other power supply options consult factory.

### PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 696

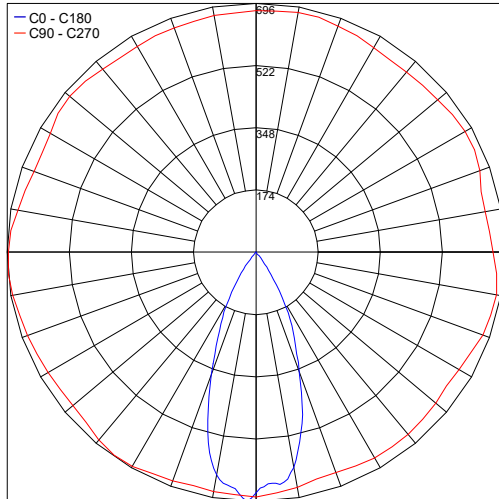

PHOTOMETRIC FILENAME : HELAX SML TORSION.IES

Job Name/Date:

Fixture Type Designation: