

Technical features

IP65 IK08




402403P

HORIZON MEDIUM 01

Designed by
PAOLO VILLA

Applique of rectangular shape for outdoor installation on a facade/wall, with single (1 side) light emission. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered frosted safety glass, molded silicone gasket and stainless steel screws. Integral 120VAC 50-60Hz, with 21 mid-power CREE XH-G LED. IP65 rating.

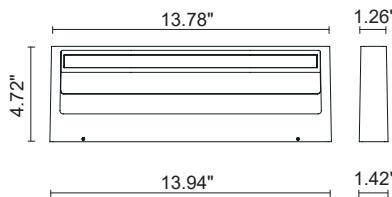

Technical data

Wattage	12W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body and fixing arms
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 21 x CREE "XH-G" LED
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz Integral
Gasket	Silicone rubber
Gross weight	3.3 lbs

light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
mid-power led	mono directional diffused	574	47.83

* Other light colors available on request: Neutral-white

Finish color options:

 Textured Gray
RAL 9006

 Anthracite Gray
RAL 7016

 Matte Black
(on request)

