The Magic Of Light.

i-lantern

design by Landa R&D






www.designplan.com

Tel: (908) 996-7710 Fax: (908) 996-7042



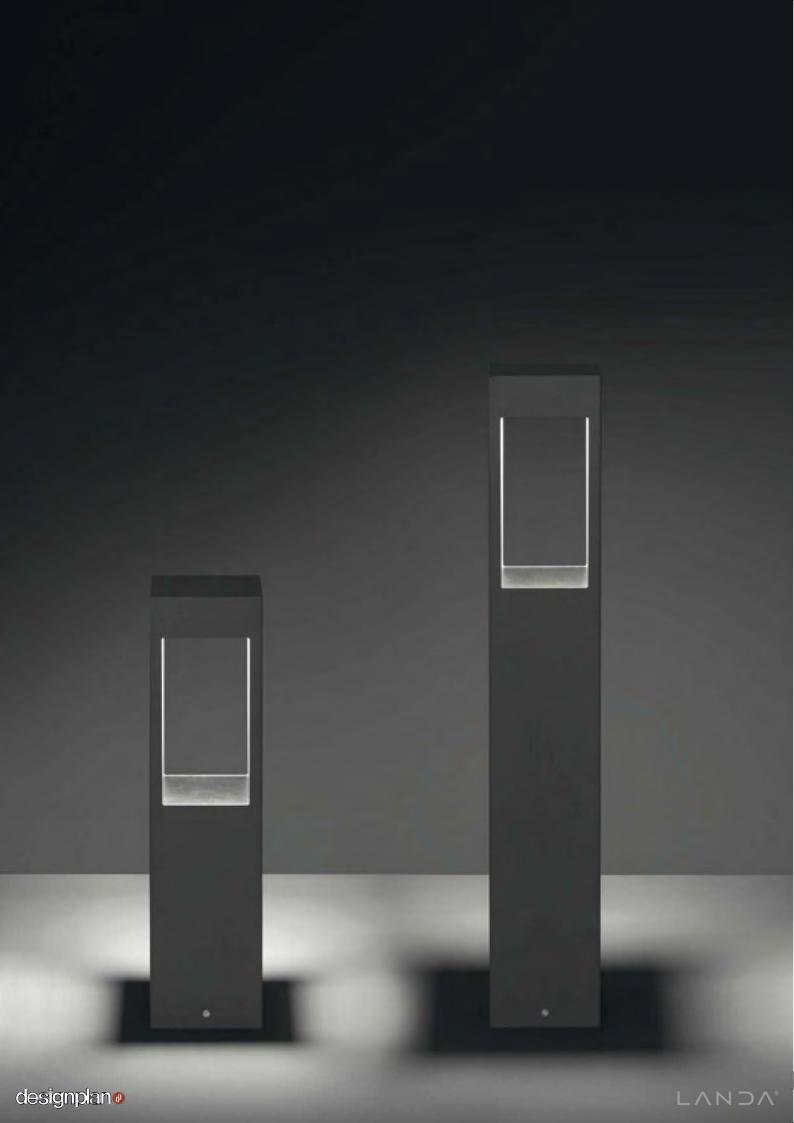

i-lantern

A luminaire with a powerful 10W heart and diffused light beam. The diffuser in opal polycarbonate offers an optimal, performing and never invasive light. I-Lantern can also be installed using a stake; the product is perfect for driveways in private and public contexts.

The body of I-Lantern is made in EN-AW6060 extruded aluminum in combination with the elements obtained through EN47100 die-casting process.

Customizable in four colo**r**s and is available in three different heights.

I-LANTERN | WALL LAMP
I-LANTERN | POLE
I-LANTERN | GARDEN LAMP





DIFFUSE



TECHNICAL SPECIFICATIONS

Life time

IP rating

IK rating


LED 10W Source lamp 12.5W Total wattage 120-277VAC, 50-60 Hz Control 0-10V Dimming 3000K Luminous flux 600 lm (1360 lm*) *Source flux Luminous efficacy 48 lm/W McADAM steps 3 Beam diffuse > 90 CRI

> IP65 IK08

-1.6' -3.3' -4.9'


L70 > 50,000 h Ta 40°C

DIFFUSE



-6.6' -4.9' -3.3' -1.6' 0 1.6' 3.3' 4.9' 6.6'

-----5.91**"**-----




MATERIALS

Body Die-cast aluminum EN47100 and extruded aluminum EN-AW6060

Diffuser Opal polycarbonate

Finishing Polyester powder paint

ORDER CODE



| | Graphite | |
|---|----------|---|
| V | Oxide | • |
| U | White | |
| G | Black | • |

035 13.78" 060 23.62" 090 35.43"

Example

LN 7 0 035 D H B B Z L

AVAILABLE ACCESSORIES

| LN00ALN.01P | Anchor bolt |
|-------------|-------------------|
| LN00ALN | Root mounting kit |
| Code | Description |



