

The
Magic
Of
Light.

i-lantern

design by Landa R&D

designplan 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



i-lantern

Technology & Spirit. An interactive cage for seizing and protecting the light, also controllable via Bluetooth, for outdoor installations such as driveways and gardens.

I-Lantern is a luminaire with a height of 78.7" for ground installations. A pole with a light aesthetic, thanks to its particular minimal shape. There are two available powers, 10W and 24W, for a product that cannot go unnoticed and is never invasive. A performing light: the diffused light beam does not dazzle and, at the same time, lights up paths.

The body of the I-Lantern is made in aluminum extruded by a special laser cut process and can be customized by four finishes: graphite, oxide, white and black, made by powder coating.

I-LANTERN | WALL LAMP
I-LANTERN | BOLLARD
I-LANTERN | GARDEN LAMP





i-lantern


| 10W

DIFFUSE



TECHNICAL SPECIFICATIONS

	DIFFUSE
Source lamp	LED 10W
Total wattage	12.5W
Voltage	120-277VAC, 50-60 Hz
Control	0-10V Dimming
Light color	3000K
Luminous flux *Source flux	600 lm (1360 lm*)
Luminous efficacy	48 lm/W
McADAM steps	3
Beam	diffuse
CRI	> 90
Life time	L70 > 50,000 h Ta 40°C
IP rating	IP65
IK rating	IK08

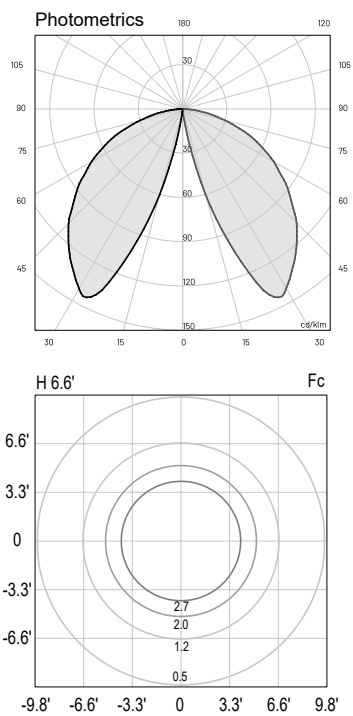

MATERIALS

<i>Body</i>	Die-cast aluminum EN47100 and extruded aluminum EN-AW6060
<i>Diffuser</i>	Opal polycarbonate
<i>Finishing</i>	Polyester powder paint

ORDER CODE


LN70200DHB10_

Finishing

L	Graphite	●
V	Oxide	●
U	White	○
G	Black	●

Example

LN70200DHB10L

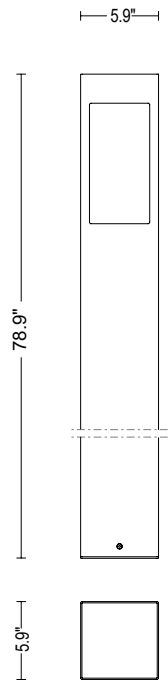

AVAILABLE ACCESSORIES

<i>Code</i>	<i>Description</i>
LN00ALN	Root mounting kit
LN00ALN.01P	Anchor bolt



i-lantern



24W

DIFFUSE



TECHNICAL SPECIFICATIONS

	DIFFUSE
Source lamp	LED 24W
Total wattage	26W
Voltage	120-277VAC, 50-60 Hz
Control	0-10V Dimming
Light color	3000K
Luminous flux *Source flux	1170 lm (2780 lm*)
Luminous efficacy	45 lm/W
McADAM steps	3
Beam	diffuse
CRI	> 90
Life time	L70 > 50,000 h Ta 40°C
IP rating	IP65
IK rating	IK08

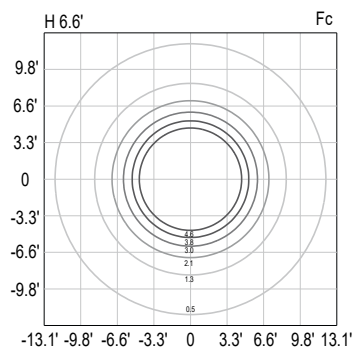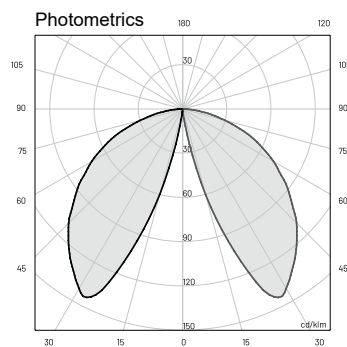

MATERIALS


Body	Die-cast aluminum EN47100 and extruded aluminum EN-AW6060
Diffuser	Opal polycarbonate
Finishing	Polyester powder paint

ORDER CODE

LN71200DHB10_

Finishing	L	Graphite	●
	V	Oxide	●
	U	White	○
	G	Black	●

Example LN71200DHB10L

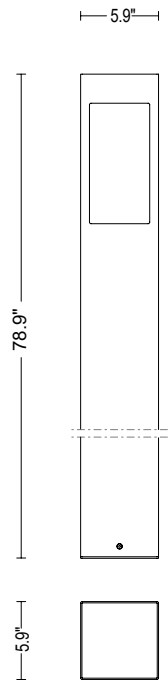

AVAILABLE ACCESSORIES

Code	Description
LN00ALN	Root mounting kit
LN00ALN.01P	Anchor bolt

