

# IF Bollard


The IF bollard has a simple, elegant design offered at a standard height of 2.95'. It is ideal for walkways or bicycle paths as well as town squares and is available in 4 color temperatures and 3 optics options.



## TECHNICAL DATA

<b>Wattage / Input</b>	4.1W (120VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body / Head: Aluminum Column: Extruded Aluminum Lens: PMMA (Highly Transparent Plexiglass)
<b>CCT</b>	2200K, 2700K, 3000K, 4000K
<b>CRI</b>	>80 (3000K) >70 (2200K, 2700K, 4000K)
<b>Delivered Lumens</b>	303 lm (3000K)
<b>Efficacy</b>	73.1 lm/W (3000K)
<b>Optics</b>	AP05 Satiné, AS06 Satiné, AP06 Satiné
<b>Finishes</b>	5 Standard, Custom RAL on request (See below)
<b>Fixture Dimensions</b>	Head: 4.29" l x 1.50" w Height: 2.95' standard
<b>Fixture Weight</b>	5.51 lbs
<b>LED Source</b>	1 LED lighting unit consisting of 4 LEDs
<b>IP Rating</b>	IP65
<b>Impact Rating</b>	IK22

Fixture Dimensions

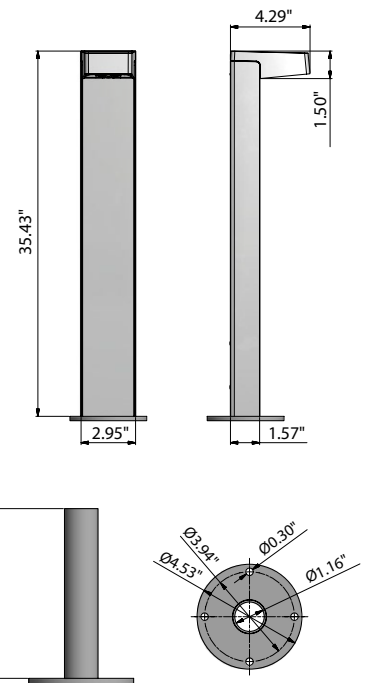

## ORDERING INFORMATION

Example: IF-22-AP05-S-1.


IF				1
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finishes</b>	<b>Pole Height</b>
IF	22 - 2200K 27 - 2700K 30 - 3000K 40 - 4000K	AP05 - AP05 Satiné AS06 - AS06 Satiné AP06 - AP06 Satiné	S - Silver Gray (Standard) W - White A - Anthracite CS - Cor-ten C - Custom RAL (Consult factory for "C")	1 - 2.95' (0.9 m)

Job Name/Date:

Fixture Type Designation:

## FIXTURE TECHNICAL INFORMATION


MODEL NO.	LPH (ft)	L1 (in)	H1 (in)	B1 (in)	L2 (in)	LIGHTING UNITS	LED	POWER (W)
IF	2.95'	4.29"	1.57"	2.91"	/	1	4	5

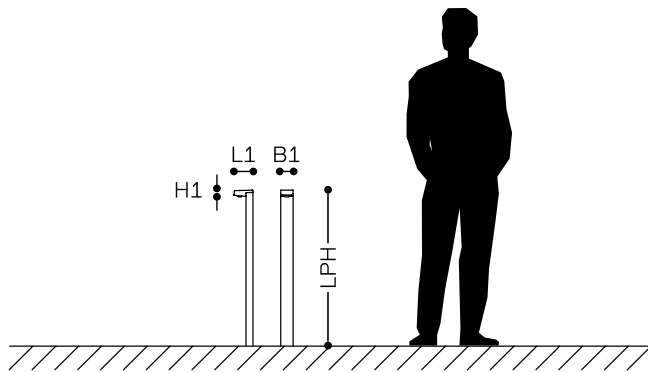

Delivery contents


- 1 x if Bollard
- 1 x Base
- 1 x Plug Techno TH387 (Female)
- 2 x Grub screw (M5 x 0.31")
- 4 x Dowel Fischer SX 0.31" x 2.56"
- 4 x Hexagonal screw A4 0.24" x 2.36"
- 4 x Washer M6

## ACCESSORIES - Installation




**AM-00010**  
Anchor Base Assembly

## OPTICS




AP05 satiné

AP05 for town square lighting  
 C0-C180 = 68°  
 C90 = 75°  
 C270 = 26°

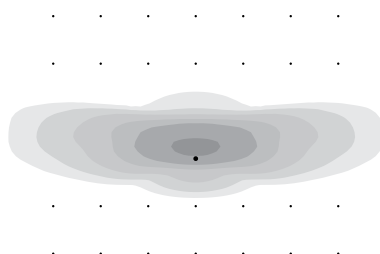

AS06 satiné

AS06 for walkways and bicycle paths  
 C0-C180 = 82°  
 C90 = 60°  
 C270 = 55°

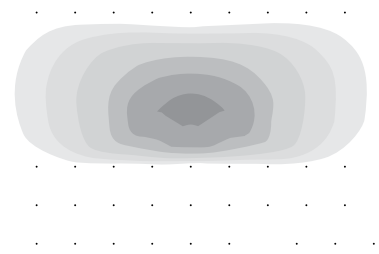

AP06 satiné

Job Name/Date:

Fixture Type Designation: