

IF-W Wall-Mounted


The IF-W is a wall-mounted luminaire with a simple, elegant design. It is ideal for pathways or town squares and is available in 2 color temperatures and 2 optics options.



TECHNICAL DATA

Wattage / Input	4.1W (120VAC)
Power Supply	Integral
Construction	Body / Head: Aluminum Pole: Extruded Aluminum Lens: PMMA (Highly Transparent Plexiglass) Fittings: AISI 316 Stainless Steel
CCT	2200K, 2700K, 3000K, 4000K
CRI	CRI>80
Delivered Lumens	332 lm (3000K)
Efficacy	80.1 lm/W
Optics	3 Light Distributions (see below and page 2)
Finishes	Silver Gray, White, Anthracite Custom RAL on request
Fixture Dimensions	Head: 4.56" l x 2.94" w x 2.48" h
Fixture Weight	1.76 lbs
LED Source	1 Lighting Unit with 4 High-Performance LEDs
IP Rating	IP65
Impact Rating	IK20

Fixture Dimensions

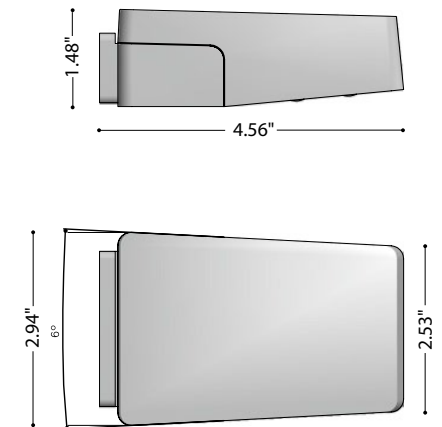

ORDERING INFORMATION

Consult factory for model no. and ordering information.


Model No.	CCT	Optics	Finishes
IF-W	30 - 3000K	AP05 - AP05 Satiné	S - Silver Gray (Standard) W - White A - Anthracite C - Custom RAL (Consult factory for "C")
	40 - 4000K	AS06 - AS06 Satiné	
		AP06 - AP06 Satiné	

Job Name/Date:


Fixture Type Designation:

FIXTURE DIMENSIONS CHART


MODEL NO.	LPH (ft)	L1 (in)	H1 (in)	B1 (in)	L2 (in)
IF-W	/	/	1.48"	2.94"	4.56"

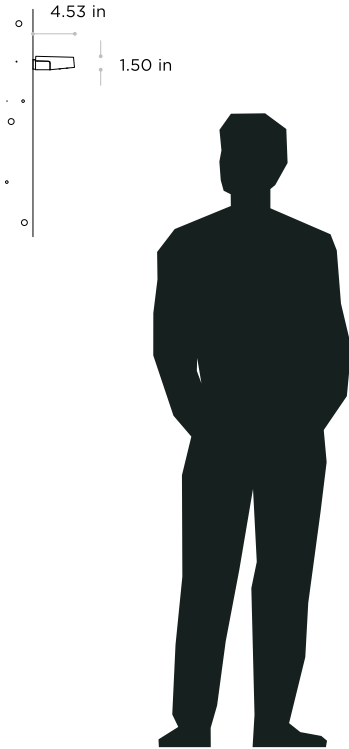


LIGHT DISTRIBUTIONS

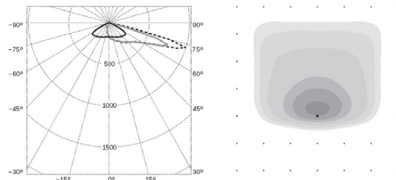

AP05 (Tilt 8°)
Asymmetric Extra Forward

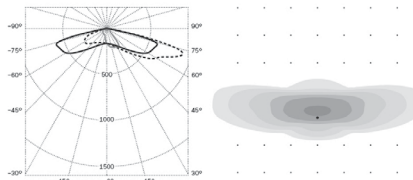

AS06
Asymmetric Extra Side Throw

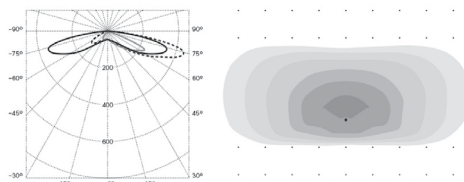

AP06
Asymmetric Forward and Extra Side Throw

Job Name/Date:

Fixture Type Designation: