

# IMPRESSION IP20


Impression IP20 is a linear wall mounted luminaire that can be used in combination with Expression to create custom combinations of indirect lighting. The Impression can be used with the lamp at the top, at the bottom, or side- ways.



Ceiling Cut-Out: 50.98" x 7.32"  
Fixture Dimensions

## TECHNICAL DATA

<b>Wattage / Input</b>	23.1W (350mA or 120VAC)
<b>Power Supply</b>	Remote or Integral 0-10V
<b>Construction</b>	Body: CALCYT® plaster
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	—
<b>Efficacy</b>	—
<b>Optics</b>	Fixed
<b>Finishes</b>	Paintable Plaster
<b>Fixture Dimensions</b>	50.79" l x 3.74" w x 7.13" h
<b>Cut-out Dimension</b>	50.98" x 7.32"
<b>Color Consistency</b>	4-Step MacAdam
<b>IP Rating</b>	IP20

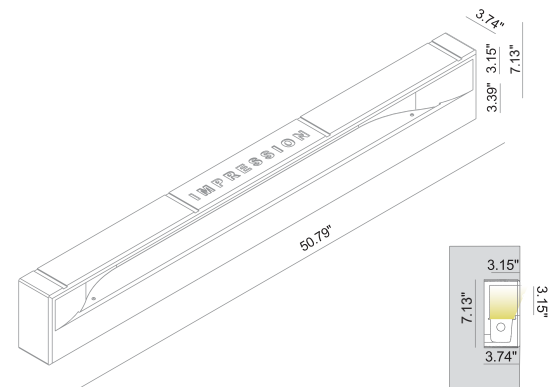

## ORDERING INFORMATION

*Example: 317 65 100. Power Supplies and Accessories ordered separately.*

Model No.	Description
317 29 000 - 2700K	23.1W, 3000 LM, Remote (driver sold separately), IP20 Indoor
317 29 100 - 3000K	23.1W, 3000 LM, Remote (driver sold separately), IP20 Indoor
317 65 000 - 2700K	23.1W, 3000 LM, Integral 0-10V, IP20 Indoor
317 65 100 - 3000K	23.1W, 3000 LM, Integral 0-10V, IP20 Indoor

Job Name/Date:

Fixture Type Designation:


## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00480</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2	1-1

For other power supply options consult factory.

## REQUIRED ACCESSORIES - Installation

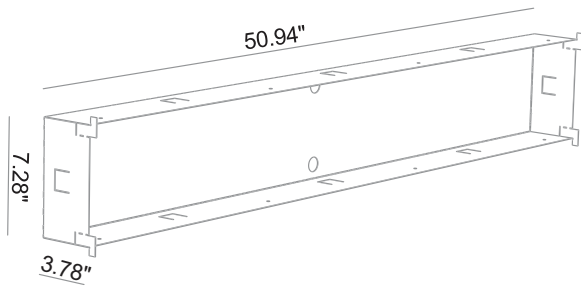

**717 01 000**

Required Outer Casing

Housing: perforated aluminum

Job Name/Date:

Fixture Type Designation: