


Intono is a new family of surface-mounted fixtures with a simple, elegant design which features three innovative characteristics: the **ability to blend in** with the wall it is mounted on, **to play music** and to **communicate with smart-speakers (3.9 and 4.9)** such as Google Home or Amazon Echo, over Wi-Fi using the ZigBee protocol.



## TECHNICAL DATA

<b>Wattage / Input</b>	6W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Die-Cast Aluminum Fixing Bracket: Stainless Steel AISI 316L Lens: Black-Serigraphed, Tempered, Transparent Extra-Clear Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	80, >90
<b>Delivered Lumens</b>	146 lm per beam (3000K, 22°, CRI 80) 128 lm per beam (3000K, 22°, CRI 90)
<b>Efficacy</b>	48.7 lm/W per beam (3000K, 22°, CRI 80) 42.7 lm/W per beam (3000K, 22°, CRI 90)
<b>Optics</b>	13°+13°, 13°+33°, 22°+22°, 33°+33°
<b>Finishes</b>	5 Standard, see below
<b>Fixture Dimensions</b>	1.18" w x 1.81" l x 3.54" h
<b>Fixture Weight</b>	0.37 lbs
<b>LED Source</b>	2 Power LEDs
<b>Lumen Maintenance</b>	L90, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK04

Fixture Dimensions

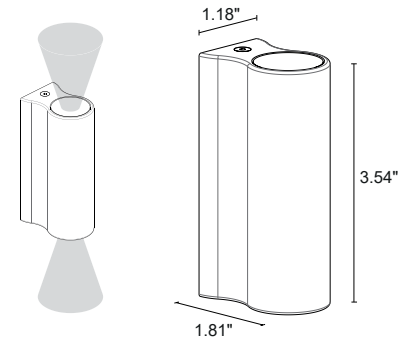

## ORDERING INFORMATION

*Example: NT12001001FMM7. Power Supplies ordered separately.*

NT1200					
Model No.	CRI	Honeycomb Louvre	CCT	Optics	Finish
NT1200	0 - CRI 80 1 - CRI>90	000 - None 001 - Honeycomb Louvre	F - 2700K 5 - 3000K 9 - 4000K	SS - 13° + 13° MM - 22° + 22° LL - 33° + 33° SL - 13° + 33°	E - White F - Gray H - Anthracite T - Cor-ten 7 - Primer

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00275</a>	Non-Dim	120-277VAC to 24VDC, 12W, Class 2, IP66	1-1
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1
<a href="#">PPLT00481</a>	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-3
<a href="#">PPLT00157</a>	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-8
<a href="#">PPLT00599</a>	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120VAC to 24VDC, 96W, Class 2	1-12
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-13
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-13

For other power supply options consult factory.

## ACCESSORIES

### Anti-glare



### Honeycomb Louvre\*

\*Optical accessory added  
in ordering matrix


Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Note all Photometry is 3000K


### S - 13° CRI 80

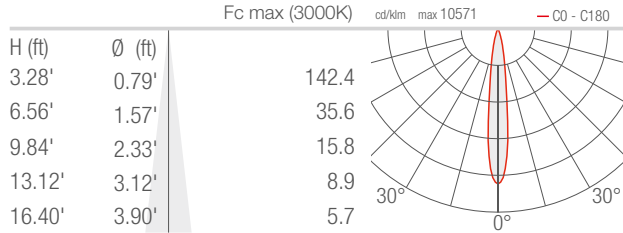

### M - 22° CRI 80

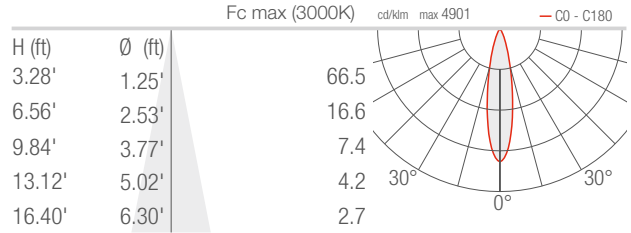

### L - 33° CRI 80

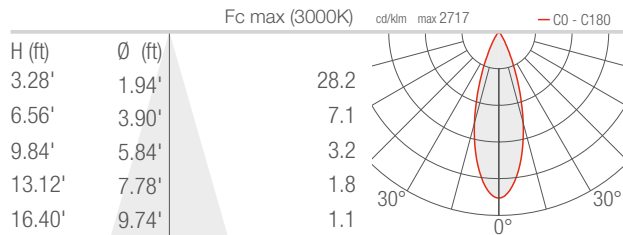

Job Name/Date:

Fixture Type Designation: