

# INTONO 2.1


Intono is a new family of surface-mounted fixtures with a simple, elegant design which features three innovative characteristics: the **ability to blend in** with the wall it is mounted on, **to play music** and to **communicate with smart-speakers (3.9 and 4.9)** such as Google Home or Amazon Echo, over Wi-Fi using the ZigBee protocol.



## TECHNICAL DATA

<b>Wattage / Input</b>	6W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Die-Cast Aluminum Fixing Bracket: Stainless Steel AISI 316L Lens: Black-Serigraphed, Tempered, Transparent Extra-Clear Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	80, >90
<b>Delivered Lumens</b>	352 lm (3000K, 34°, CRI 80) 326 lm (3000K, 34°, CRI 90)
<b>Efficacy</b>	58.7 lm/W (3000K, 34°, CRI 80) 54.3 lm/W (3000K, 34°, CRI 90)
<b>Optics</b>	Asymmetrical 8°, 11°, 34°, 68°, Diffuse
<b>Finishes</b>	5 Standard, see below
<b>Fixture Dimensions</b>	1.97" w x 2.99" l x 5.91" h
<b>Fixture Weight</b>	1.39 lbs
<b>LED Source</b>	1 Power LEDs
<b>Lumen Maintenance</b>	L90, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK04

Fixture Dimensions

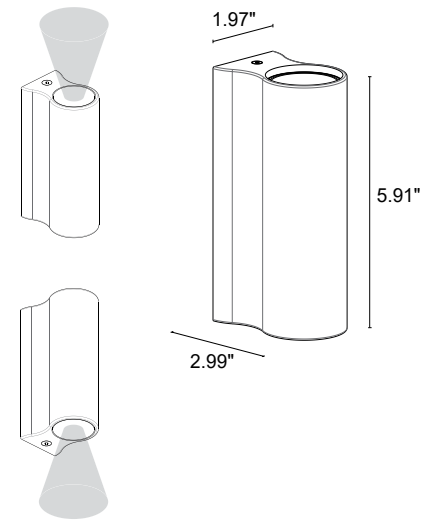

## ORDERING INFORMATION

Example: NT2110100190KE. Power Supplies ordered separately.

NT2110					
Model No.	CRI	Honeycomb Louvre	CCT	Optics	Finish
NT2110	0 - CRI 80 1 - CRI>90	000 - None 001 - Honeycomb Louvre <i>Honeycomb Louvre NOT available with diffuse (D) and asymmetrical 8° (Z) optics.</i>	F - 2700K 5 - 3000K 9 - 4000K	0Z - Asymmetrical 8° 0T - 11° 0M - 34° 0K - 68° 0D - Diffuse	E - White F - Gray H - Anthracite T - Cor-ten 7 - Primer

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00275</a>	Non-Dim	120-277VAC to 24VDC, 12W, Class 2, IP66	1-1
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1
<a href="#">PPLT00481</a>	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-3
<a href="#">PPLT00157</a>	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-8
<a href="#">PPLT00599</a>	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-12
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-13
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-13

For other power supply options consult factory.

## ACCESSORIES

### Anti-glare



#### Honeycomb Louvre\*

\*Optical accessory added in ordering matrix

The honeycomb louvre can be provided on all optics, **EXCEPT** for diffuse (D) and asymmetrical 8° (Z) optics for Intono 2.1.


Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Note all Photometry is 3000K


### Z – Asymmetrical 8° CRI 80

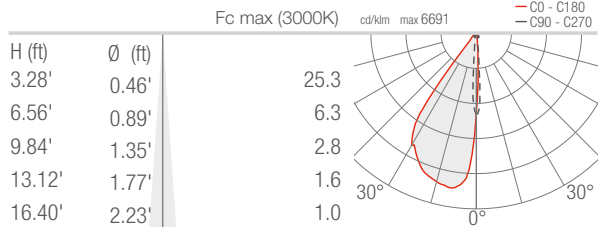


### T – 11° CRI 80

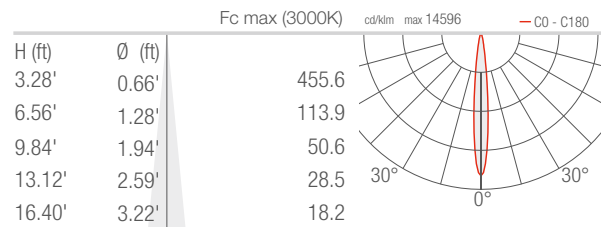


### M – 34° CRI 80

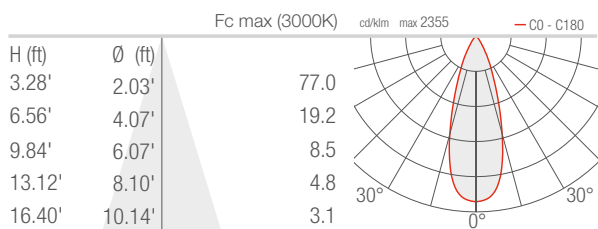

### K – 68° CRI 80

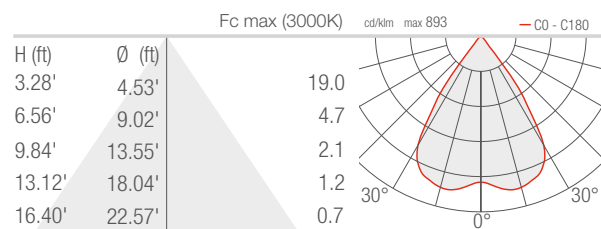

### D - Diffuse CRI 80

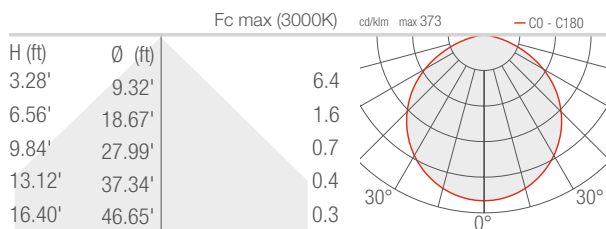

Job Name/Date:

Fixture Type Designation: