

INTONO 3.9


Intono is a new family of surface-mounted fixtures with a simple, elegant design which features three innovative characteristics: the **ability to blend in** with the wall it is mounted on, **to play music** and to **communicate with smart-speakers (3.9 and 4.9)** such as Google Home or Amazon Echo, over Wi-Fi using the ZigBee protocol.



TECHNICAL DATA

Wattage / Input	9W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-Cast Aluminum Fixing Bracket: Stainless Steel AISI 316L Lens: Black-Serigraphed, Tempered, Transparent Extra-Clear Glass
CCT	2700K, 3000K, 4000K
CRI	80, >90
BUG Rating	B0-U3-G0 (3000K, Sharp 17°, Wall Grazing) B0-U4-G0 (3000K, 15°, 20°, 43°, Asymmetric)
Delivered Lumens	837 lm (3000K, 15°, CRI 80) 696 lm (3000K, 15°, CRI 90)
Efficacy	93.0 lm/W (3000K, 15°, CRI 80) 77.3 lm/W (3000K, 15°, CRI 90)
Optics	6 Standard, see below
Finishes	5 Standard, see below (4 Stage Marine Grade Finish)
Fixture Dimensions	3.15" w x 4.76" l x 9.45" h
Fixture Weight	4.94 lbs
LED Source	1 COB High Density LED
Lumen Maintenance	L95, B10 >50,000hrs (Ta 25°C)
Color Consistency	2-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP65
IK Rating	IK04
Bluetooth	See accessories on page 2

Fixture Dimensions

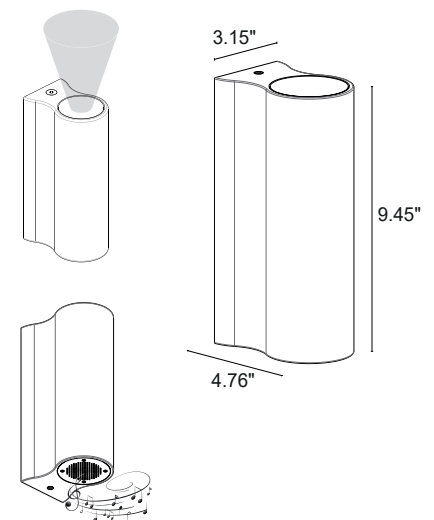

Note: 3.1, 3.2, 3.9, 4.1, 4.2 and 4.9 models to be mounted to the wall over a single gang switch box.

ORDERING INFORMATION

Example: NT390010005M9T. Power Supplies ordered separately.

NT3900					
Model No.	CRI	Honeycomb Louver	CCT	Optics	Finish
NT3900	0 - CRI 80 1 - CRI>90	000 - None 001 - Honeycomb Louver <i>Honeycomb Louvre NOT available with sharp 17° (Z), wall grazing (W) and asymmetrical (A) optics.</i>	F - 2700K 5 - 3000K 9 - 4000K	Z - Sharp 17° S - 15° M - 20° L - 43° W - Wall Grazing A - Asymmetric	9E - White 9F - Gray 9H - Anthracite 9T - Cor-ten 97 - Primer

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-8
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-8

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-8

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-8

For other power supply options consult factory.

ACCESSORIES

Anti-glare



Honeycomb Louver*

*Optical accessory added in ordering matrix
The honeycomb louvre can be provided on all optics,
EXCEPT for sharp 17° (Z), wall grazing (W) and asym-
metrical (A) optics for Intono 3.9.

ACCESSORIES

Installation



WUNT39A00

Bluetooth 3.0 audio control kit with power supply unit and amplifier (for "Alexa" or "Google" voice control system)


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K


Z - Asymmetrical 11° CRI 80

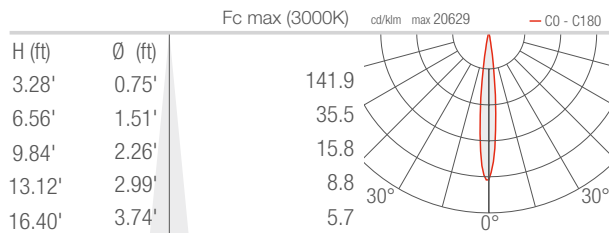


S - 15° CRI 80

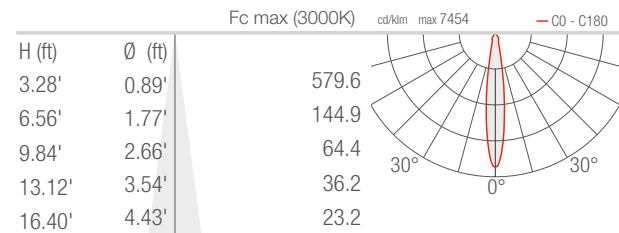


M - 20° CRI 80

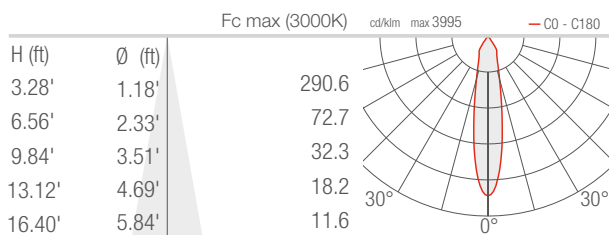


L - 43° CRI 80

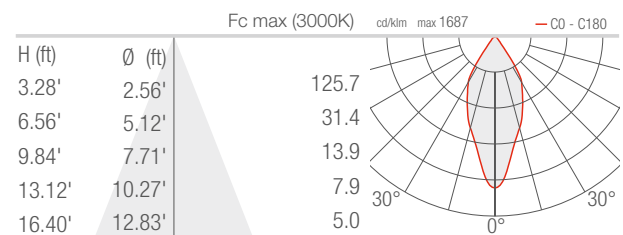

W - Wall grazing CRI 80

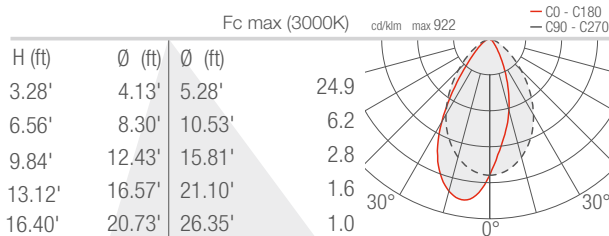

A - Asymmetrical CRI 80

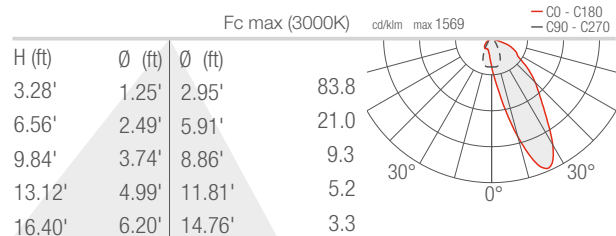

Job Name/Date:

Fixture Type Designation: