


Intono is a new family of surface-mounted fixtures with a simple, elegant design which features three innovative characteristics: the **ability to blend in** with the wall it is mounted on, **to play music** and to **communicate with smart-speakers (3.9 and 4.9)** such as Google Home or Amazon Echo, over Wi-Fi using the ZigBee protocol.

TECHNICAL DATA

Wattage / Input	38W (120VAC)
Power Supply	Integral (Non-Dim / 0-10V Dimming)
Construction	Body: Die-Cast Aluminum Fixing Bracket: Stainless Steel AISI 316L Lens: Black-Serigraphed, Tempered, Transparent Extra-Clear Glass
CCT	2700K, 3000K, 4000K
CRI	80, >90
Delivered Lumens	2772 lm per beam (3000K, 12°, CRI 80) 2304 lm per beam (3000K, 12°, CRI >90)
Efficacy	72.9 lm per beam (3000K, 12°, CRI 80) 60.6 lm per beam (3000K, 12°, CRI >90)
Optics	7 Standard, see below
Finishes	5 Standard, see below (4 Stage Marine Grade Finish)
Fixture Dimensions	4.33" w x 6.54" l x 12.99" h
Fixture Weight	10.58 lbs
LED Source	2 COB High Density LEDs
Lumen Maintenance	L95, B10 >50,000hrs (Ta 25°C)
Color Consistency	2-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP65
Impact Resistance	IK04



Fixture Dimensions

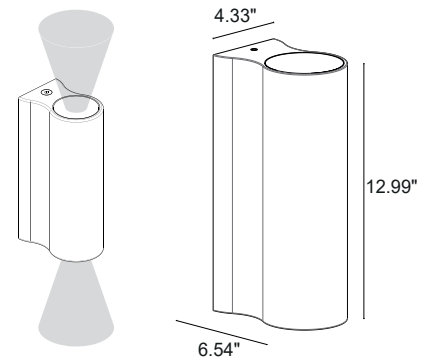

Note: 3.1, 3.2, 3.9, 4.1, 4.2 and 4.9 models to be mounted to the wall over a single gang switch box.

ORDERING INFORMATION

Example: NT42100000FWWT.


NT4210						
Model No.	CRI	Control	Honeycomb Louver	CCT	Optics	Finish
NT4210	0 - CRI 80 1 - CRI>90	0 - on/off R - 0-10V	00 - None 01 - Honeycomb Louver <i>Honeycomb Louvre NOT available with wall grazing + asymmetrical (WA), sharp 12° + 57° (ZL) and wall grazing + wall grazing (WW) optics.</i>	F - 2700K 5 - 3000K 9 - 4000K	SS - 12°+ 12° MM - 23°+ 23° LL - 57°+ 57° SL - 12°+ 57° WW - Wall Grazing x2 WA - WG + Asymmetric ZL - Sharp 12°+ 57°	E - White F - Gray H - Anthracite T - Cor-ten 7 - Primer

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Anti-glare



Honeycomb Louvre*


*Optical accessory added in ordering matrix

The honeycomb louvre can be provided on all optics, **EXCEPT** for wall grazing + asymmetrical (WA), sharp 12° + 57° (ZL) and wall grazing + wall grazing (WW) optics for Intono 4.2.


PHOTOMETRIC DATA

Note all Photometry is 3000K


Z - Asymmetrical 28° CRI 80

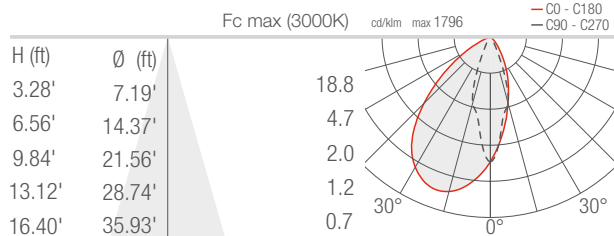


S - 12° CRI 80

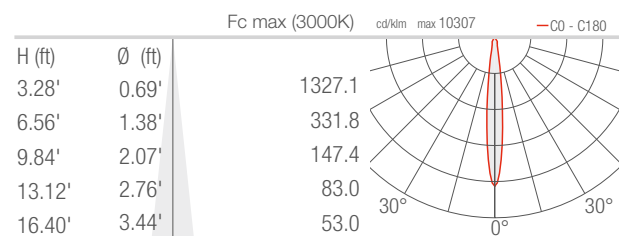


M - 23° CRI 80

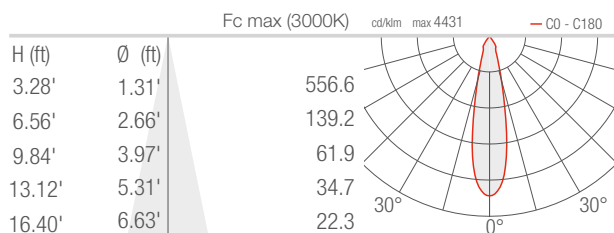


L - 57° CRI 80

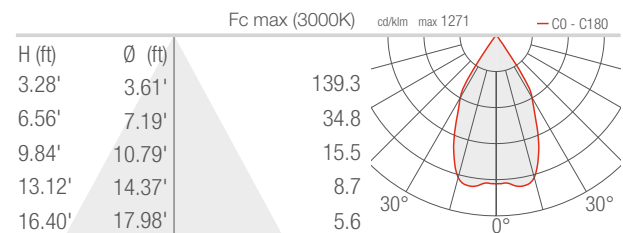

W - Wall grazing CRI 80

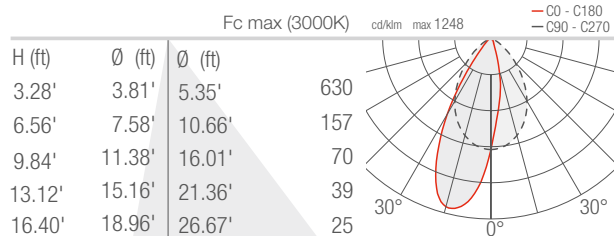

A - Asymmetrical CRI 80

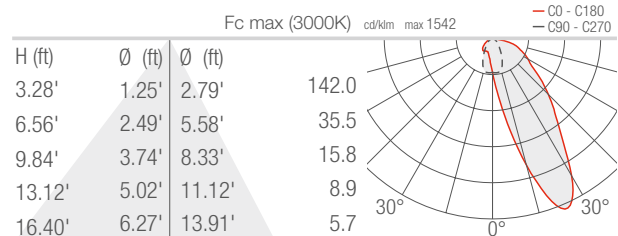

Job Name/Date:

Fixture Type Designation: