


Intono is a new family of surface-mounted fixtures with a simple, elegant design which features three innovative characteristics: the **ability to blend in** with the wall it is mounted on, **to play music** and to **communicate with smart-speakers (3.9 and 4.9)** such as Google Home or Amazon Echo, over Wi-Fi using the ZigBee protocol.



## TECHNICAL DATA

|                           |                                                                                                                                          |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Wattage / Input</b>    | 17W (24VDC)                                                                                                                              |
| <b>Power Supply</b>       | Remote, not included. See page 2.                                                                                                        |
| <b>Construction</b>       | Body: Die-Cast Aluminum<br>Fixing Bracket: Stainless Steel AISI 316L<br>Lens: Black-Serigraphed, Tempered, Transparent Extra-Clear Glass |
| <b>CCT</b>                | 2700K, 3000K, 4000K                                                                                                                      |
| <b>CRI</b>                | 80, >90                                                                                                                                  |
| <b>Delivered Lumens</b>   | 1386 lm (3000K, 12°, CRI 80)<br>1152 lm (3000K, 12°, CRI 90)                                                                             |
| <b>Efficacy</b>           | 81.5 lm/W (3000K, 12°, CRI 80)<br>67.8 lm/W (3000K, 12°, CRI 90)                                                                         |
| <b>Optics</b>             | 6 Standard, see below                                                                                                                    |
| <b>Finishes</b>           | 5 Standard, see below<br>(4 Stage Marine Grade Finish)                                                                                   |
| <b>Fixture Dimensions</b> | 4.33" w x 6.54" l x 12.99" h                                                                                                             |
| <b>Fixture Weight</b>     | 10.67 lbs                                                                                                                                |
| <b>LED Source</b>         | 1 COB High Density LED                                                                                                                   |
| <b>Lumen Maintenance</b>  | L95, B10 >50,000hrs (Ta 25°C)                                                                                                            |
| <b>Color Consistency</b>  | 2-Step MacAdam                                                                                                                           |
| <b>Operating Temp.</b>    | -4°F to +113°F                                                                                                                           |
| <b>IP Rating</b>          | IP65                                                                                                                                     |
| <b>IK Rating</b>          | IK04                                                                                                                                     |
| <b>Bluetooth</b>          | See Accessories on page 2                                                                                                                |

## Fixture Dimensions

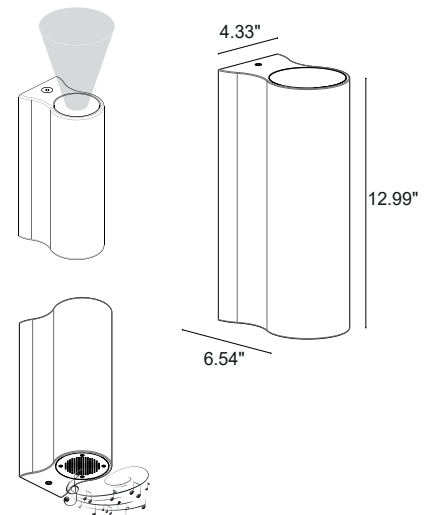

**Note:** 3.1, 3.2, 3.9, 4.1, 4.2 and 4.9 models to be mounted to the wall over a single gang switch box.

## ORDERING INFORMATION

Example: NT4900. Power Supplies ordered separately.

| NT4900    |                          |                                                                                                                                                 |                                     |                                                                                      |                                                                           |
|-----------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Model No. | CRI                      | Honeycomb Louvre                                                                                                                                | CCT                                 | Optics                                                                               | Finish                                                                    |
| NT4900    | 0 - CRI 80<br>1 - CRI>90 | 000 - None<br>001 - Honeycomb Louvre<br><i>Honeycomb Louvre NOT available with sharp 12° (Z), wall grazing (W) and asymmetrical (A) optics.</i> | F - 2700K<br>5 - 3000K<br>9 - 4000K | Z - Sharp 12°<br>S - 12°<br>M - 23°<br>L - 57°<br>W - Wall Grazing<br>A - Asymmetric | 9E - White<br>9F - Gray<br>9H - Anthracite<br>9T - Cor-ten<br>97 - Primer |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

| Part Number               | Description                                             | Input/Output                       | # of Fixtures |
|---------------------------|---------------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00284</a> | Non-Dim                                                 | 120-277VAC to 24VDC, 100W, Class 2 | 1-4           |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 1-4           |

## Suggested Lutron Compatible

| Part Number               | Option       | Lutron SKU | Dim Range | Description                                   | Input/Output                      | # of Fixtures |
|---------------------------|--------------|------------|-----------|-----------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00530</a> | L3DAE / L3D0 | L3DA/L3D0  | 100%-1%   | Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-4           |

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

| Part Number               | Description                         | Input/Output                                | # of Fixtures |
|---------------------------|-------------------------------------|---------------------------------------------|---------------|
| <a href="#">PPLT00715</a> | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-4           |

For other power supply options consult factory.

## ACCESSORIES

### Anti-glare



#### Honeycomb Louver\*

\*Optical accessory added in ordering matrix  
The honeycomb louvre can be provided on all optics,  
**EXCEPT** for sharp 12° (Z), wall grazing (W) and  
asymmetrical (A) optics.

## ACCESSORIES

### Installation



#### WUNT39A00

Bluetooth 3.0 audio control kit with power  
supply unit and amplifier (for "Alexa" or  
"Google" voice control system)


Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Note all Photometry is 3000K


### Z - Asymmetrical 28° CRI 80

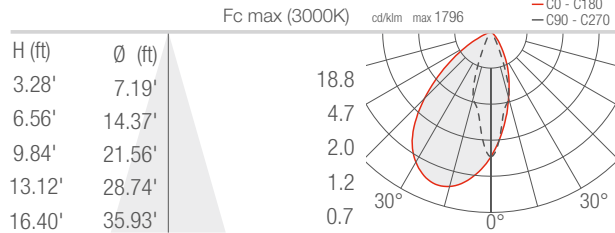


### S - 12° CRI 80

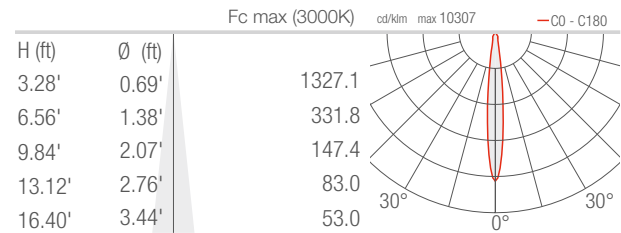


### M - 23° CRI 80

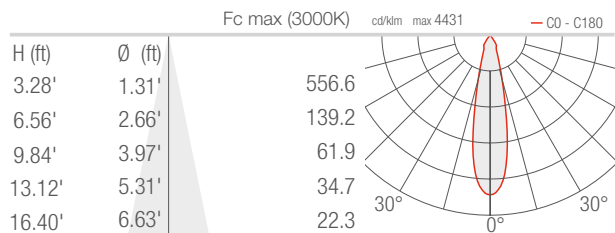


### L - 57° CRI 80

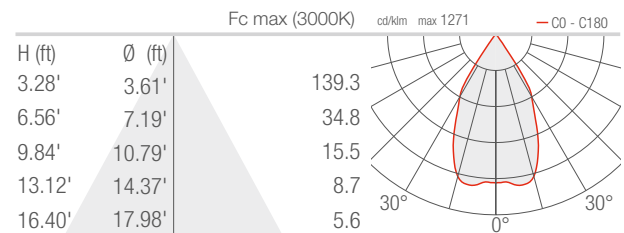

### W - Wall grazing CRI 80

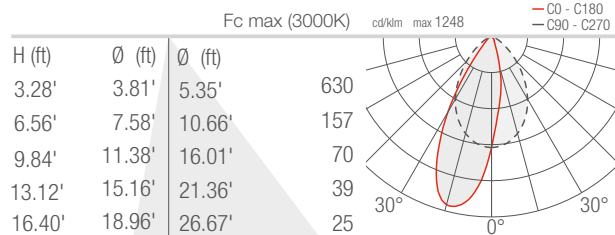

### A - Asymmetrical CRI 80

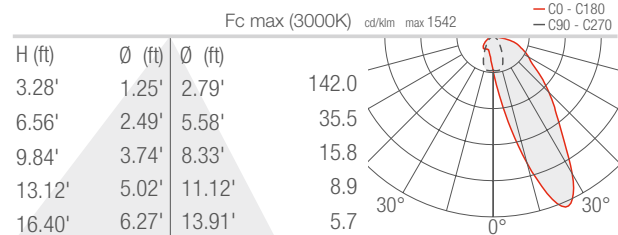

Job Name/Date:

Fixture Type Designation: