


Intono is a new family of surface-mounted fixtures with a simple, elegant design which features three innovative characteristics: the **ability to blend in** with the wall it is mounted on, **to play music** and to **communicate with smart-speakers (3.9 and 4.9)** such as Google Home or Amazon Echo, over Wi-Fi using the ZigBee protocol.



TECHNICAL DATA

Wattage / Input	17W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-Cast Aluminum Fixing Bracket: Stainless Steel AISI 316L Lens: Black-Serigraphed, Tempered, Transparent Extra-Clear Glass
CCT	2700K, 3000K, 4000K
CRI	80, >90
Delivered Lumens	1386 lm (3000K, 12°, CRI 80) 1152 lm (3000K, 12°, CRI 90)
Efficacy	81.5 lm/W (3000K, 12°, CRI 80) 67.8 lm/W (3000K, 12°, CRI 90)
Optics	6 Standard, see below
Finishes	5 Standard, see below (4 Stage Marine Grade Finish)
Fixture Dimensions	4.33" w x 6.54" l x 12.99" h
Fixture Weight	10.67 lbs
LED Source	1 COB High Density LED
Lumen Maintenance	L95, B10 >50,000hrs (Ta 25°C)
Color Consistency	2-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP65
IK Rating	IK04
Bluetooth	See Accessories on page 2

Fixture Dimensions

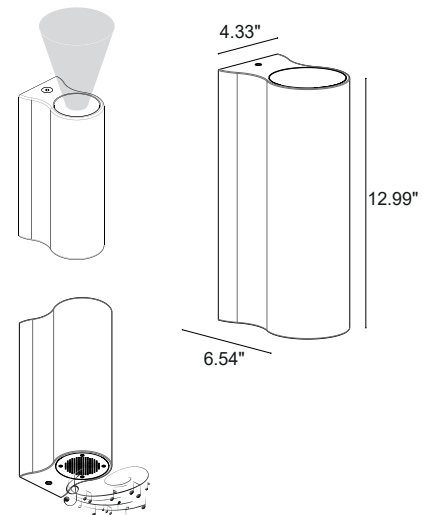

Note: 3.1, 3.2, 3.9, 4.1, 4.2 and 4.9 models to be mounted to the wall over a single gang switch box.

ORDERING INFORMATION

Example: NT4900. Power Supplies ordered separately.

NT4900					
Model No.	CRI	Honeycomb Louvre	CCT	Optics	Finish
NT4900	0 - CRI 80 1 - CRI>90	000 - None 001 - Honeycomb Louvre <i>Honeycomb Louvre NOT available with sharp 12° (Z), wall grazing (W) and asymmetrical (A) optics.</i>	F - 2700K 5 - 3000K 9 - 4000K	Z - Sharp 12° S - 12° M - 23° L - 57° W - Wall Grazing A - Asymmetric	9E - White 9F - Gray 9H - Anthracite 9T - Cor-ten 97 - Primer

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-1
PPLT00586	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-1
PPLT00709	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-4
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-4

For other power supply options consult factory.

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00717



PPLT00716




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00717	ELV / TRIAC / 0-10V Dimming	120-277VAC to 24VDC, 30W, Class 2, WET/DAMP	1-1
PPLT00716	ELV / TRIAC / 0-10V Dimming	120-277VAC to 24VDC, 60W, Class 2, WET/DAMP	1-2
PPLT00715	ELV / TRIAC / 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-4

ACCESSORIES

Anti-glare



Honeycomb Louvre*

*Optical accessory added in ordering matrix
The honeycomb louvre can be provided on all optics,
EXCEPT for sharp 12° (Z), wall grazing (W) and
asymmetrical (A) optics.

ACCESSORIES

Installation



WUNT39A00

Bluetooth 3.0 audio control kit with power
supply unit and amplifier (for "Alexa" or
"Google" voice control system)


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K


Z - Asymmetrical 28° CRI 80

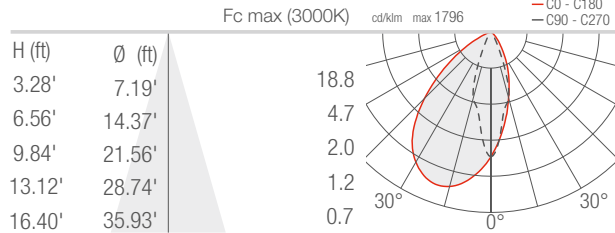


S - 12° CRI 80

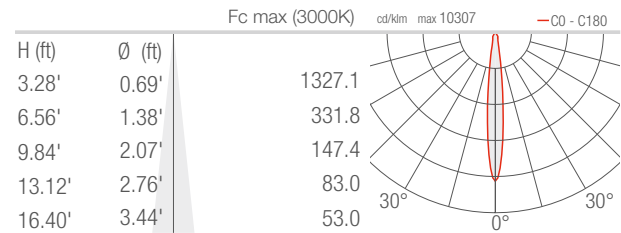


M - 23° CRI 80

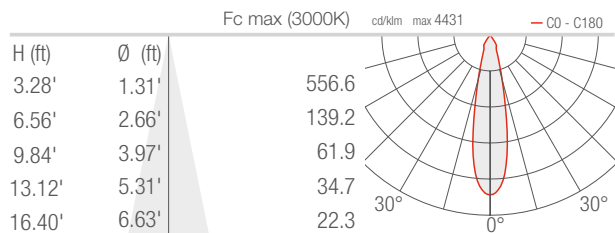


L - 57° CRI 80

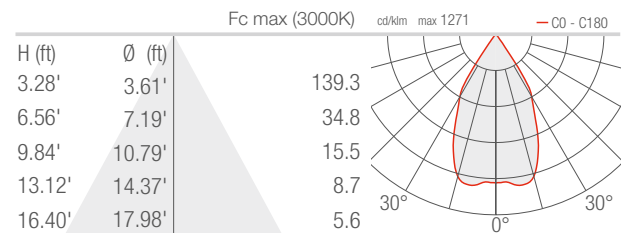

W - Wall grazing CRI 80

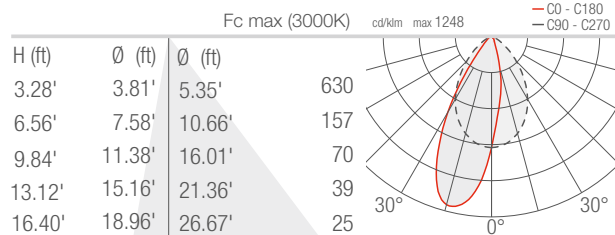

A - Asymmetrical CRI 80

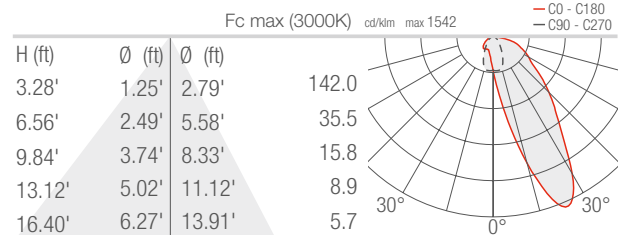

Job Name/Date:

Fixture Type Designation: