

# INTONO C IN 3.8


Intono C IN is a family of indoor, ceiling-mounted fixtures with a simple, elegant design perfect for residential or hospitality applications. It features three innovative characteristics: the **ability to blend in** with the ceiling (primer version), **to play music** and to **smart-speakers capability** (version 3.8).



## TECHNICAL DATA

<b>Wattage / Input</b>	9W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Die-Cast Aluminum Lens: Black-Serigraphed, Tempered, Transparent Extra-Clear Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	80, >90
<b>Delivered Lumens</b>	649 lm (3000K, 20°, CRI 90) 783 lm (3000K, 20°, CRI 80)
<b>Efficacy</b>	72.1 lm/W (3000K, 20°, CRI 90) 87 lm/W (3000K, 20°, CRI 80)
<b>Optics</b>	20°
<b>Finishes</b>	4 Standard, see below
<b>Fixture Dimensions</b>	3.35" w x 6.30" l x 3.94" h 6.50" w at base
<b>Fixture Weight</b>	2.54 lbs
<b>LED Source</b>	1 High Power Density COB LEDs
<b>Lumen Maintenance</b>	L95, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	2-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP40
<b>IK Rating</b>	IK06

Fixture Dimensions

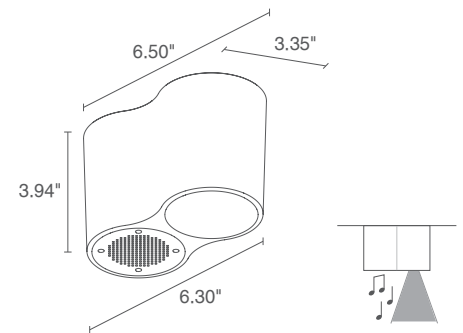

## ORDERING INFORMATION

Example: NC380010009M9N. Power Supplies ordered separately.

NC3800				M9	
<b>Model No.</b>	<b>CRI</b>	<b>Honeycomb Louvre</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>
NC3800	0 - CRI 80 1 - CRI>90	000 - None 001 - Honeycomb Louvre	F - 2700K 5 - 3000K 9 - 4000K	M9 - 20°	B - White N - Black Z - Antique Bronze 7 - Primer

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00275</a>	Non-Dim	120-277VAC to 24VDC, 12W, Class 2, IP66	1-1
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1
<a href="#">PPLT00481</a>	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-2
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-8
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-8

For other power supply options consult factory.

## ACCESSORIES

### Anti-glare



#### Honeycomb Louvre\*

\*Optical accessory added in ordering matrix



#### WUNT39A00


Bluetooth 3.0 audio control kit with power supply unit and amplifier (for Alexa or Google voice-control systems)

Mounted with TCI driver, item code #122201

## PHOTOMETRIC DATA

Note all Photometry is 3000K

M - 20° CRI 80

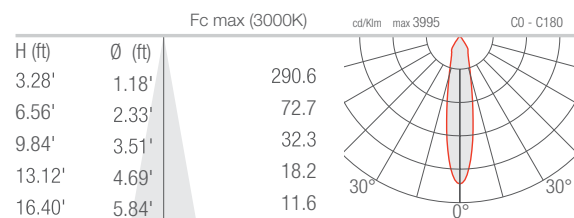

Job Name/Date:

Fixture Type Designation: