

# INTONO C OUT 2.4


Intono C OUT is a family of outdoor, ceiling-mounted fixtures with a simple, elegant design perfect for residential or hospitality applications. It features three innovative characteristics: the **ability to blend in** with the ceiling (primer version), **to play music** and to **smart-speakers capability** (version 3.9).



## TECHNICAL DATA

<b>Wattage / Input</b>	12W (120VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body: Die-Cast Aluminum Lens: Black-Serigraphed, Tempered, Transparent Extra-Clear Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	80, >90
<b>BUG Rating</b>	B0-U1-G0 (3000K, Diffuse) B1-U1-G0 (3000K, 11°, 34°, 68°)
<b>Delivered Lumens</b>	652 lm (3000K, 34°, CRI 90) 704 lm (3000K, 34°, CRI 80)
<b>Efficacy</b>	54.3 lm/W (3000K, 34°, CRI 80) 58.7 lm/W (3000K, 34°, CRI 90)
<b>Optics</b>	11°, 34°, 68°, Diffuse
<b>Finishes</b>	5 Standard, see below
<b>Fixture Dimensions</b>	2.09" w x 3.94" l x 3.23" h 4.06" w at base
<b>Fixture Weight</b>	1.32 lbs
<b>LED Source</b>	2 Power LEDs
<b>Lumen Maintenance</b>	L90, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK06

Fixture Dimensions

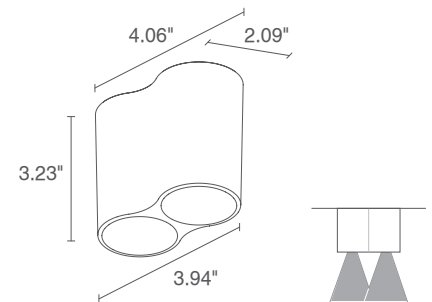

## ORDERING INFORMATION

Example: NC241000019MMH. Power Supplies ordered separately.


NC2410					
<b>Model No.</b>	<b>CRI</b>	<b>Honeycomb Louvre</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>
NC2410	0 - CRI 80 1 - CRI>90	000 - None 001 - Honeycomb Louvre <i>Honeycomb Louvre NOT available with diffuse (DD)</i>	F - 2700K 5 - 3000K 9 - 4000K	TT - 11° MM - 34° KK - 68° DD - Diffuse	E - White F - Gray H - Anthracite T - Cor-ten 7 - Primer

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Anti-glare




#### Honeycomb Louvre\*

\*Optical accessory added in ordering matrix  
 The honeycomb louvre can be provided on all optics,  
**EXCEPT** for diffuse (DD).


## PHOTOMETRIC DATA

Note all Photometry is 3000K


### TT - 11° CRI 80

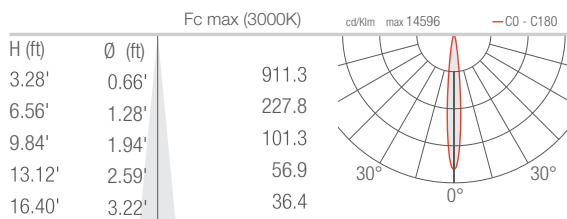


### MM - 34° CRI 80

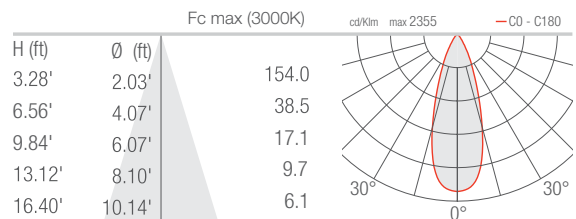

### KK - 68° CRI 80

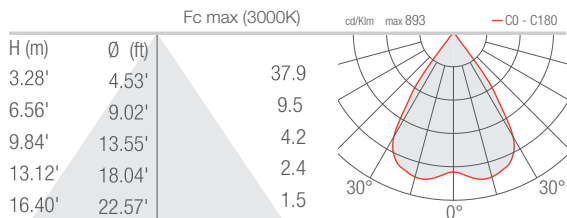

### DD - Diffuse CRI 80

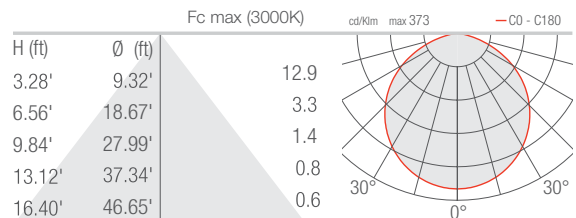

Job Name/Date:

Fixture Type Designation: