



designplan® 

INTONO C OUT

OUTDOOR CEILING MOUNTED FOR PRIVATE HOMES AND HOSPITALITY
WITH LIGHT OUTPUT ALONE OR ALSO WITH SPEAKER



2700K 3000K 4000K



OUTDOOR

INDOOR



NEW INTONO C OUT 2.4
12W 120VAC




NEW INTONO C IN 2.3
12W 120VAC



NEW INTONO C OUT 3.4
20W 120VAC
ON/OFF, 0-10V



NEW INTONO C IN 3.3
20W 120VAC
ON/OFF, 0-10V



NEW INTONO C OUT 3.9
9W 24VDC




NEW INTONO C IN 3.8
9W 24VDC




INTONO C OUT



INTONO C OUT 2.4




Asymmetrical optics
(Intono C OUT 3.4)

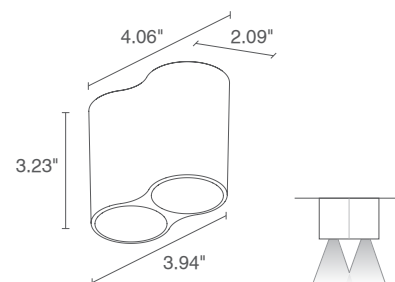

^
INTONO C OUT 3.9
speaker:
maximum power
nominal impedance Z
mean sound pressure level

3W
16 Ohm
86 dB (1W/1m - 3.28')



POWER / POWER SUPPLY MODEL NO.

12W 120VAC
NC2410 ■ ■ ■ **E** White
NC2410 ■ ■ ■ **F** Grey
NC2410 ■ ■ ■ **H** Anthracite
NC2410 ■ ■ ■ **T** Cor-ten
NC2410 ■ ■ ■ **7** Primer

CRI

0 - CRI 80
1 - CRI >90

CONTROL SYSTEM

on/off

HONEYCOMB LOUVRE

0 - not present
1 - present
(not compatible with diffuse optics)

LED COLOR

F - 2700K
5 - 3000K
9 - 4000K

OPTICS

TT - 11°
MM - 34°
KK - 68°
DD - diffuse

LUMEN OUTPUT AT SOURCE

976 lm (3000K, CRI 80)

DELIVERED LUMEN OUTPUT

704 lm (3000K, 34°, CRI 80)

NO. AND TYPE OF LED

2 power LEDs
3-step MacAdam, 50,000h L90 B10 (Ta 25°C)

MATERIAL

body in die-cast aluminum
lens in black-serigraphed, transparent, tempered
extra-clear glass

POWER SUPPLY UNIT

built in

MOUNTING

surface mounted (ceiling)

FEATURES

easy installation thanks to 4-point
magnetic attachment

NOTES


indoor version: Intono C IN 2.3
version compatible with Google Home
or Amazon Echo available on request
for voice command control

v
INTONO C OUT 3.4
version painted with primer





INTONO C OUT 3.4

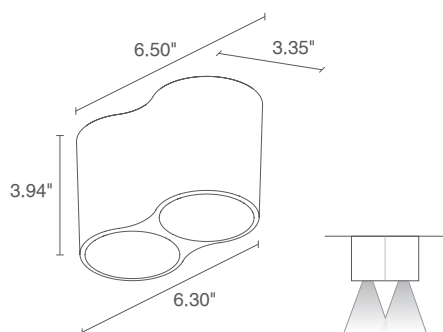



20W 120VAC

NC3410 0 0 0 0 E White
NC3410 0 0 0 0 F Grey
NC3410 0 0 0 0 H Anthracite
NC3410 0 0 0 0 T Cor-ten
NC3410 0 0 0 0 7 Primer

0 - CRI 80 1 - CRI >90	
0 - on/off D - DALI R - 0-10V	
0 - not present 1 - present (not compatible with the asymmetrical optics)	
F - 2700K 5 - 3000K 9 - 4000K	
SS - 15° MM - 20° LL - 43° AA - asymmetrical	
1976 lm (3000K, CRI 80)	
1674 lm (3000K, 15°, CRI 80)	
2 high power density COB LEDs 2-step MacAdam, 50,000h L95 B10 (Ta 25°C)	
body in die-cast aluminum lens in black-serigraphed, transparent, tempered extra-clear glass	
built in	
surface mounted (ceiling)	
easy installation thanks to 4-point magnetic attachment	
indoor version: Intono C IN 3.3 version compatible with Google Home or Amazon Echo available on request for voice command control	



INTONO C OUT 3.9

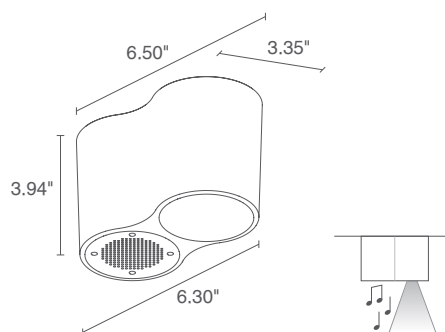

9W 24VDC

NC3900 00 00 00 M9 E White
NC3900 00 00 00 M9 F Grey
NC3900 00 00 00 M9 H Anthracite
NC3900 00 00 00 M9 T Cor-ten
NC3900 00 00 00 M9 7 Primer

0 - CRI 80 1 - CRI >90	
0 - not present 1 - present	
F - 2700K 5 - 3000K 9 - 4000K	
20°	
988 lm (3000K, CRI 80)	
783 lm (3000K, 20°, CRI 80)	
1 high power density COB LED 2-step MacAdam, 50,000h L95 B10 (Ta 25°C)	
body in die-cast aluminum lens in black-serigraphed, transparent, tempered extra-clear glass	
not included	
surface mounted (ceiling)	
easy installation thanks to 4-point magnetic attachment	
indoor version: Intono C IN 3.8 version compatible with Google Home or Amazon Echo available on request for voice command control	

INTONO C OUT

ACCESSORIES AND POWER SUPPLY UNITS

ACCESSORIES



WUNT39A00

Bluetooth 3.0 audio control kit with power supply unit and amplifier (for Alexa or Google voice-control systems)
(Intono C OUT 3.9)



WUNT39A01

Wi-Fi light control kit
(Intono C OUT 3.9)


▼

INTONO C OUT 3.4

20W, asymmetrical optics



✓
INTONO C OUT 3.4
20W, asymmetrical optics

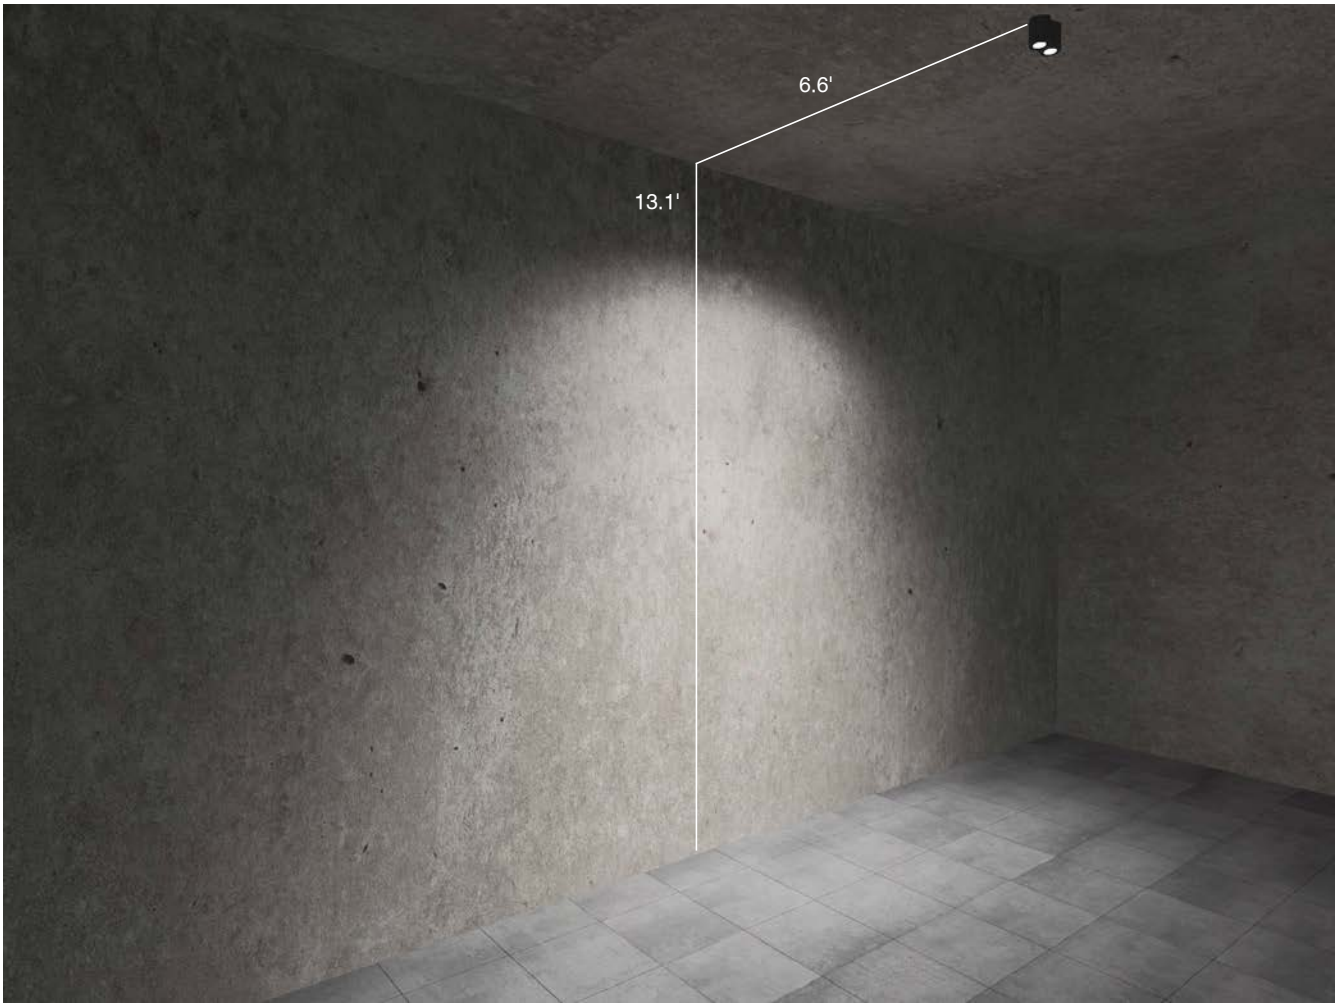



INTONO C IN 2.3
3000K, 12W, 34°, antique bronze

INTONO C IN

INDOOR CEILING MOUNTED FOR PRIVATE HOMES AND HOSPITALITY
WITH LIGHT OUTPUT ALONE OR ALSO WITH SPEAKER



2700K 3000K 4000K



INDOOR



NEW **INTONO C IN 2.3**
12W 120VAC



NEW **INTONO C IN 3.3**
20W 500mA
ON/OFF, 0-10V


OUTDOOR



NEW **INTONO C OUT 2.4**
12W 120VAC



NEW **INTONO C OUT 3.4**
20W 500mA
ON/OFF, 0-10V



NEW **INTONO C IN 3.8**
9W 24VDC



NEW **INTONO C OUT 3.9**
9W 24VDC




INTONO C IN 3.8

speaker:
maximum power 3W
nominal impedance Z 16 Ohm
mean sound pressure level 86 dB (1W/1m)




INTONO C IN



INTONO C IN 2.3



Asymmetrical optics
(Intono C* / 3.3)



POWER / POWER SUPPLY		12W 120VAC
MODEL NO.		NC2310 00 B White NC2310 00 N Black NC2310 00 Z Antique bronze NC2310 00 7 Primer
CRI		0 - CRI 80 1 - CRI >90
CONTROL SYSTEM		on/off
HONEYCOMB LOUVRE		0 - not present 1 - present (not compatible with diffuse optics)
LED COLOR		F - 2700K 5 - 3000K 9 - 4000K
OPTICS		TT - 11° MM - 34° KK - 68° DD - diffuse
LUMEN OUTPUT AT SOURCE		976 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT		704 lm (3000K, 34°, CRI 80)
NO. AND TYPE OF LED		2 power LEDs 3-step MacAdam, 50,000h L90 B10 (Ta 25°C)
MATERIAL		body in die-cast aluminum lens in black-serigraphed, transparent, tempered extra-clear glass
POWER SUPPLY UNIT		built in
MOUNTING		surface mounted (ceiling)
FEATURES		easy installation thanks to 4-point magnetic attachment
NOTES		outdoor version: Intono C OUT 2.4 version compatible with Google Home or Amazon Echo available on request for voice command control


INTONO C IN 3.3

version painted with primer





INTONO C IN 3.3

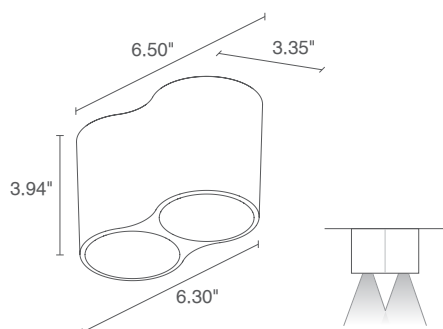



20W 500mA

NC3310 0 0 0 0 B White
NC3310 0 0 0 0 N Black
NC3310 0 0 0 0 Z Antique bronze
NC3310 0 0 0 0 7 Primer

0 - CRI 80 1 - CRI >90	
0 - on/off D - DALI R - 0/1-10V	
0 - not present 1 - present (not compatible with the asymmetrical optics)	
F - 2700K 5 - 3000K 9 - 4000K	
SS - 15° MM - 20° LL - 43° AA - asymmetrical	
1976 lm (3000K, CRI 80)	
1674 lm (3000K, 15°, CRI 80)	
2 high power density COB LEDs 2-step MacAdam, 50,000h L95 B10 (Ta 25°C)	
body in die-cast aluminum lens in black-serigraphed, transparent, tempered extra-clear glass	
built in	
surface mounted (ceiling)	
easy installation thanks to 4-point magnetic attachment	
outdoor version: Intono C OUT 3.4 version compatible with Google Home or Amazon Echo available on request for voice command control	



INTONO C IN 3.8

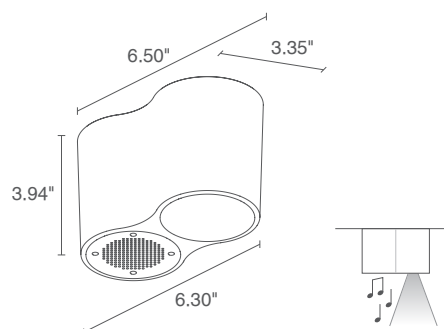

9W 24VDC

NC3800 00 00 M9 B White
NC3800 00 00 M9 N Black
NC3800 00 00 M9 Z Antique bronze
NC3800 00 00 M9 7 Primer

0 - CRI 80 1 - CRI >90	
0 - not present 1 - present	
F - 2700K 5 - 3000K 9 - 4000K	
20°	
988 lm (3000K, CRI 80)	
783 lm (3000K, 20°, CRI 80)	
1 high power density COB LED 2-step MacAdam, 50,000h L95 B10 (Ta 25°C)	
body in die-cast aluminum lens in black-serigraphed, transparent, tempered extra-clear glass	
not included	
surface mounted (ceiling)	
easy installation thanks to 4-point magnetic attachment	
outdoor version: Intono C OUT 3.9 version compatible with Google Home or Amazon Echo available on request for voice command control	

INTONO C IN

ACCESSORIES AND POWER SUPPLY UNITS

ACCESSORIES



WUNT39A00

Bluetooth 3.0 audio control kit with power supply unit and amplifier (for Alexa or Google voice-control systems)

Mounted with TCI driver, item code #122201

(Intono C IN 3.8)




WUNT39A01

Wi-Fi light control kit
NOT UL LISTED
(Intono C IN 3.8)

▼

INTONO C IN 3.3

20W, asymmetrical optics

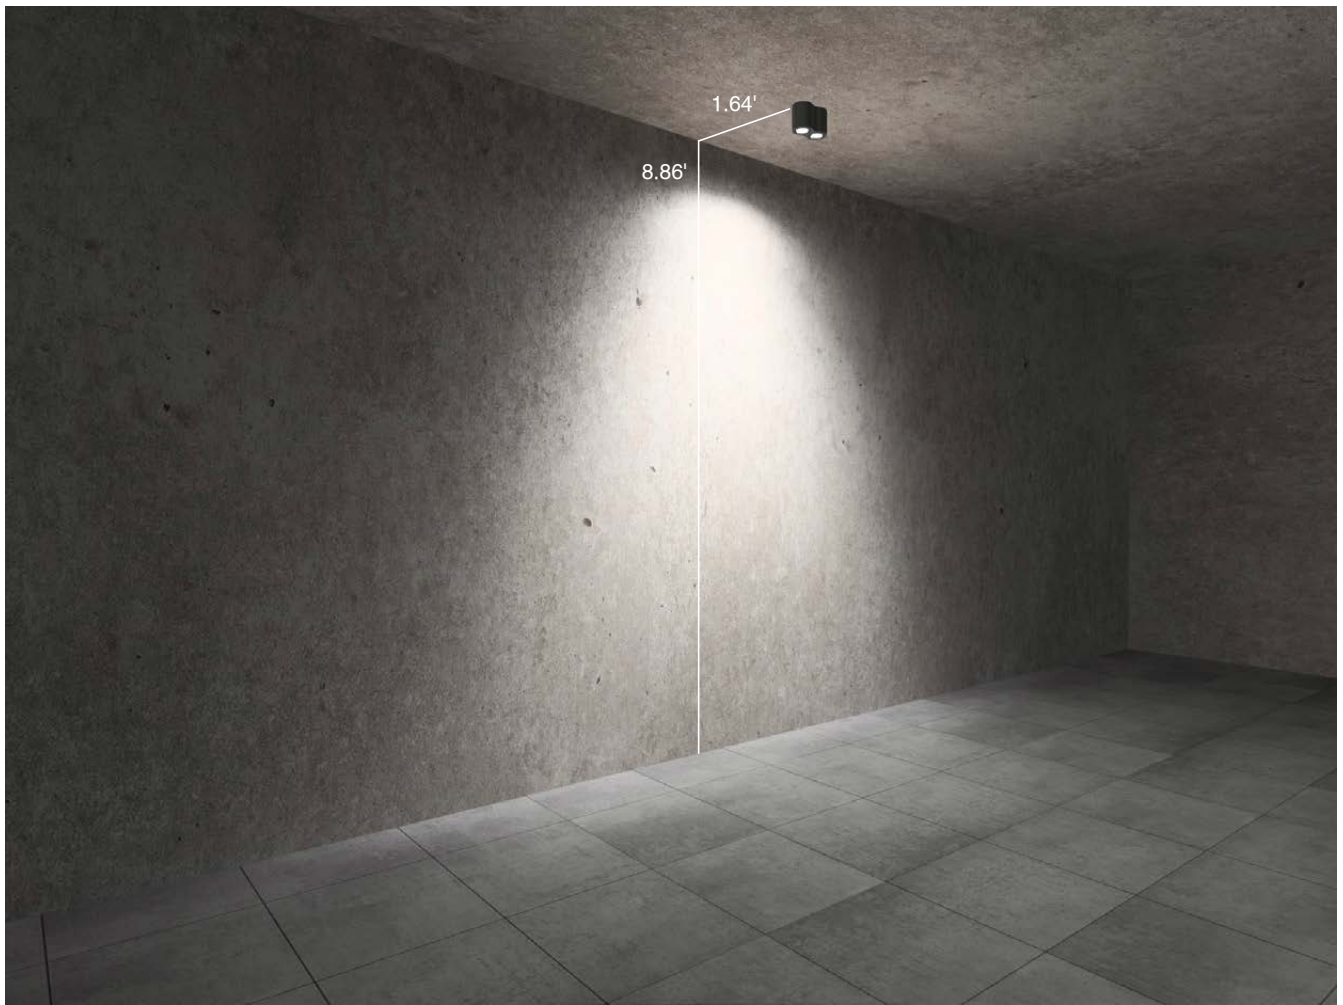

✓
INTONO C IN 3.3
20W, asymmetrical optics




INTONO C IN / INTONO C OUT


INDOOR CEILING MOUNTED / OUTDOOR CEILING MOUNTED

INTONO C IN 2.3 INTONO C OUT 2.4


TT - 11° CRI 80

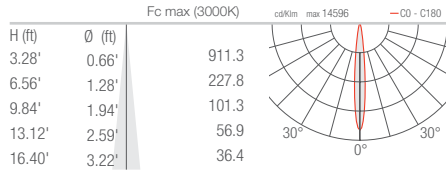


MM - 34° CRI 80

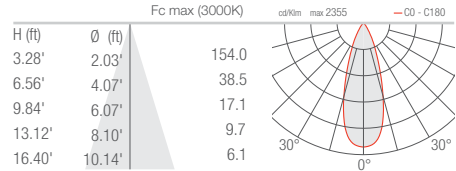

KK - 68° CRI 80

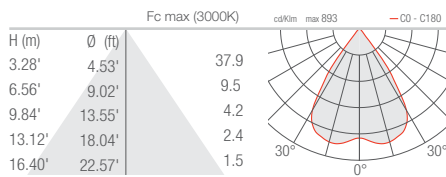


DD - Diffuse CRI 80

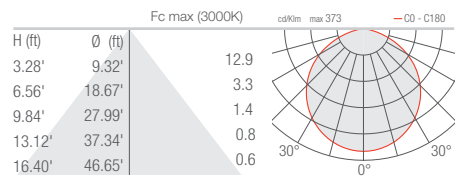


INTONO C IN 3.3 INTONO C OUT 3.4


SS - 15° CRI 80

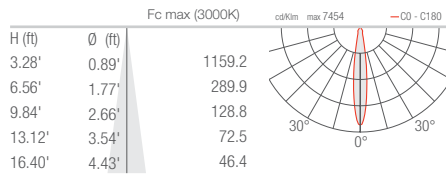


MM - 20° CRI 80

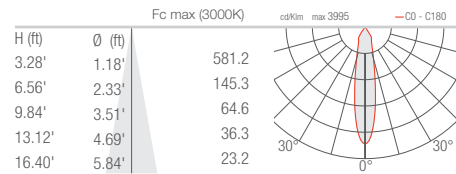

LL - 43° CRI 80

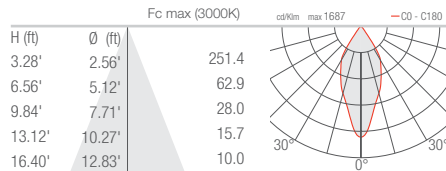

AA - Asymmetrical CRI 80

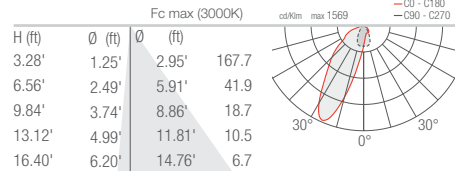

INTONO C IN 3.8 INTONO C OUT 3.9

M - 20° CRI 80

