


# INVISILED

ACCENT LIGHT  
AND MINIMAL DIMENSIONS

Indoor Recessed

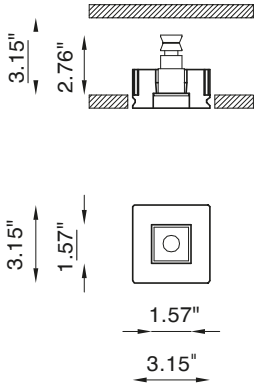

## Invisiled



### OTHER AVAILABLE CODES

|              |                    |                    |
|--------------|--------------------|--------------------|
| BU6348.27.AC | <i>lens</i>        | 14°                |
|              | <i>light color</i> | 2700K              |
| BU6348.40.AC | <i>lens</i>        | 14°                |
|              | <i>light color</i> | 4000K (on request) |

### TECHNICAL FEATURES

|                          |  |
|--------------------------|--|
| Code                     | BU6348.AC  |
| Type                     | Downlight 90°   Wall recessed 90°                              |
|                          |  |
| Material                 | AC: AirCoral®  |
| Absorption capacity*     | 11.30 ft²  |
| Weight                   | 0.66 lbs   |
| Mounting                 | Wall and ceiling recessed                                      |
| IP rating                | IP40   |
| Control gear             | Remote constant current electronic driver (not included)       |
| Cut out for plasterboard | 3.54" x 3.54"  |
| Lamp type                | LED  |
|                          |  |
|                          | Vf: 3 VDC  |
| Lamp wattage             | 1 x 2W - 500mA   |
| Luminous efficacy        | 1 x 170 lm - 3000K 500mA                                       |
| Light distribution       | Narrow beam 14°  |
| Fitting                  | -  |
| Light color              | White 3000K  |
| Light hole               | 1.57" x 1.57"  |
| Voltage connection       | By driver (optional)   |
| CRI                      | >90  |
| Note                     | Other available light colors:<br>2700K,<br>4000K (on request). |



INVISILED IP44/IP65

\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²

