


# INVISIBLE

WALL AND CEILING RECESSED  
FIXTURE WITH FLUSH GLASS

Queen's Gate Palace, London

Indoor Recessed

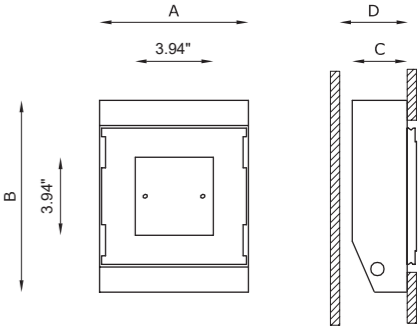



## Invisible



### OTHER AVAILABLE CODES

BU6133.Z.27.AC	<i>lens</i>	40°
	<i>light color</i>	2700K
BU6133.Z.40.AC	<i>lens</i>	40°
	<i>light color</i>	4000K (on request)
example of code composition	BU6139.AC 4 R 40 M 30 WD	

### TECHNICAL FEATURES

Code	BU6133.Z.AC
Type	Downlight 90° Wall recessed 90°
	
Material	AC: AirCoral®
Absorption capacity*	24.76 ft²
Weight	3.31 lbs
Mounting	Wall and ceiling recessed
IP rating	IP40
Control gear	ON/OFF driver (included)
Dimensions	A: 7.48 in; B: 9.65 in; C: 2.76 in; D: 3.15 in
Cut out for plasterboard	7.68 × 7.28 in
Lamp type	LED 500 mA 
Lamp wattage	1 × 9W
Luminous efficacy	1 × 1125 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	3.94 × 3.94 in
Voltage connection	220-240V · 50/60Hz
CRI	>90
Note	Extra white satin glass fixed by screws on wall/ceiling level.  On request available dimmable PUSH or DALI.  Other available light colors: 2700K, 4000K (on request).

designplan® 

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042

\* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²