


INZETA

SWIVELLING PROJECTOR  
MINIMAL REAR SPACE REQUIRED

SUPERFUTUREDESIGN\*

Indoor Recessed

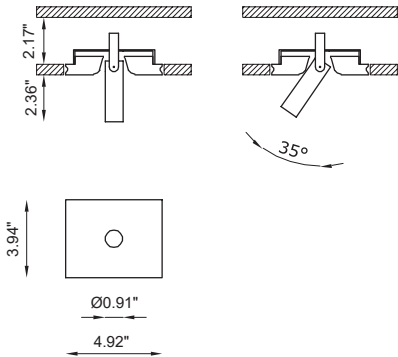

Inzeta



OTHER AVAILABLE CODES

BU184 _ AC 4 R _ E _ WD		
	light color	
27	2700K	
30	3000K	
40	4000K (on request)	
	lens	
22	22°	
50	50°	
	finishing	
6	black	
8	white	

example of code composition  
BU1846.AC 4 R 22 M 30 WD

TECHNICAL FEATURES

Code	BU184X.AC XX
Type	Tilttable downlight ± 360° / ± 35°
Material	AC: AirCoral®
Absorption capacity*	14.96 ft²
Finishing	Black   White
Weight	1.76 lbs
Mounting	Wall and ceiling recessed
IP rating	IP40
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	5.31 × 4.33 in
Lamp type	LED 500 mA Vf: 11.5 VDC
Lamp wattage	1 × 6W
Luminous efficacy	1 × 600 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light color	White 3000K White 2700K   4000K (on request)
Light hole	Ø 0.91 in
Voltage connection	By driver (optional)
CRI	>90



79 Trenton Avenue  
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710  
Fax: (908) 996-7042

\* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²