


JACOBBOX




ADJUSTABLE RECESSED LIGHT

Private Villa, Forlì

Indoor Recessed

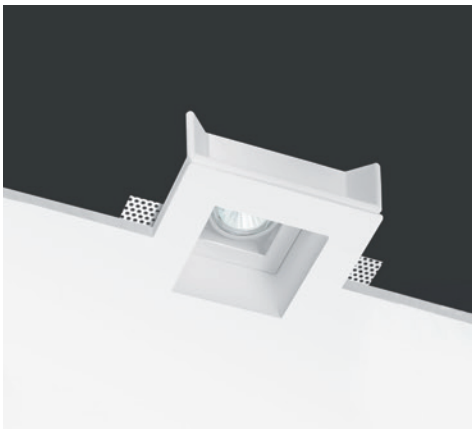


Jacobbox

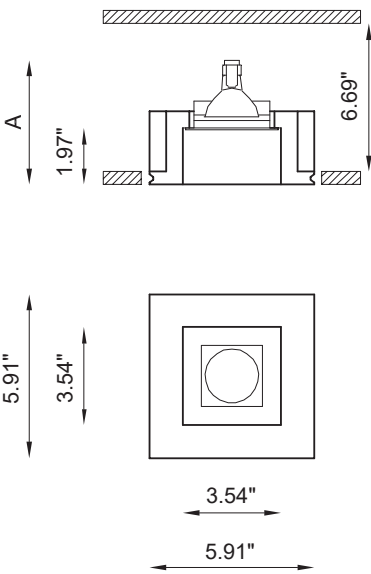

OTHER AVAILABLE CODES

BU6248.Z.27.AC	<i>lens</i>	40°
	<i>light color</i>	2700K
BU6248.Z.40.AC	<i>lens</i>	40°
	<i>light color</i>	4000K
example of code composition	BU6249.AC 4 R 40 M 30 WD	

TECHNICAL FEATURES

Code	BU6248.Z.AC
Type	Tiltable downlight and wall recessed $\pm 30^\circ$
	
Material	AC: AirCoral®
Absorption capacity*	33.05 ft²
Weight	2.87 lbs
Mounting	Wall and ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Dimensions	A: 5.12 in
Cut out for plasterboard	6.30 × 6.30 in
Lamp type	LED 500 mA AC: Vf: 18 VDC
Lamp wattage	1 × 9W
Luminous efficacy	1 × 1125 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	3.54 × 3.54 in
Voltage connection	By driver (optional)
CRI	>90
Note	Other available light colors: 2700K, 4000K.

OPTIONAL

Brick box	cod. BR6248LT	cod. BR6249LT
-----------	---------------	---------------





79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

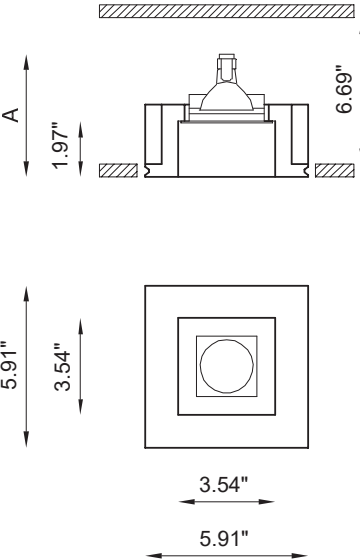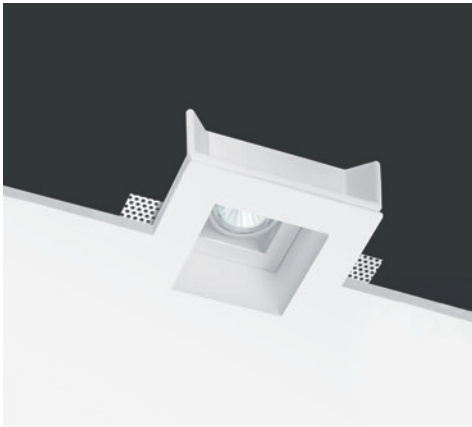

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²



Jacobox Dim To Warm



TECHNICAL FEATURES

Code	BU6316.AC 7 R 40 M 98 WD
Type	Tiltable downlight and wall recessed ± 30°
	
Material	AC: AirCoral®
Absorption capacity*	33.05 ft²
Weight	2.87 lbs
Mounting	Wall and ceiling recessed
IP rating	IP20
Control gear	Remote driver** (not included)
Dimensions	A: 5.12 in
Cut out for plasterboard	6.30 × 6.30 in
Lamp type	LED 350 mA
	 Vf: 17 VDC
Lamp wattage	1 × 6W
Luminous efficacy	1 × 600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light color	Dimming range 1800/3000K
Light hole	3.54 × 3.54 in
Voltage connection	By driver (optional)
CRI	>90
Note	**Jacobox Dim To Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.

OPTIONAL

Brick box	cod. BR1875LT
-----------	---------------



* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²