



Kami is a reliable, long-lasting IP65-rated wall or ceiling mounted luminaire offered in 2 versions. Kami 1 has a solid opal polycarbonate diffuser and is available in 2 color temperatures and 5 standard finishes.



## TECHNICAL DATA

<b>LED Wattage / Total</b>	10W LED, 13W total
<b>Power Supply</b>	Remote 350mA, not included. See page 2.
<b>Construction</b>	Body: Die-Cast Aluminum Lens: Opal Polycarbonate
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B0-U2-G1
<b>CRI</b>	>90
<b>Delivered Lumens</b>	570 lm (3000K)
<b>Efficacy</b>	43.8 lm/W (3000K)
<b>Optics</b>	Diffuse
<b>Finishes</b>	5 Standard, See Below
<b>Fixture Dimensions</b>	11.5" x 6.7" x 2.4"
<b>Lumen Maintenance</b>	L70 >50,000hrs (Ta 40°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK08

Fixture Dimensions



## ORDERING INFORMATION

Example: LNKA10POSDHBAZVW.US. Power Supplies ordered separately.

LNKA10POSD		BAZ			US
Model No.	CCT	BAZ	Finish	Installation	US
LNKA10POSD	H - 3000K N - 4000K	BAZ	L - Graphite H - Gray V - Oxide G - Black U - White	W - Wall C - Ceiling	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
<a href="#">PPLT00480-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-1
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-1 (1-4)

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1

For other power supply options consult factory.

## PHOTOMETRIC DATA


Note: All photometric data is 3000K

Maximum Candela = 159.9

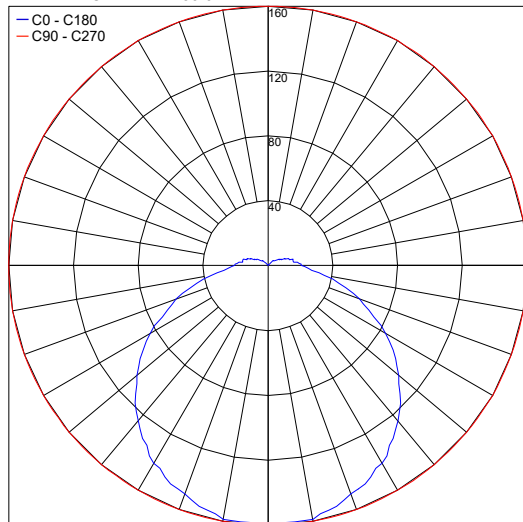

PHOTOMETRIC FILENAME : KAMI 1 3000K KA10POSDHB10X.IES

Maximum Candela = 163.3

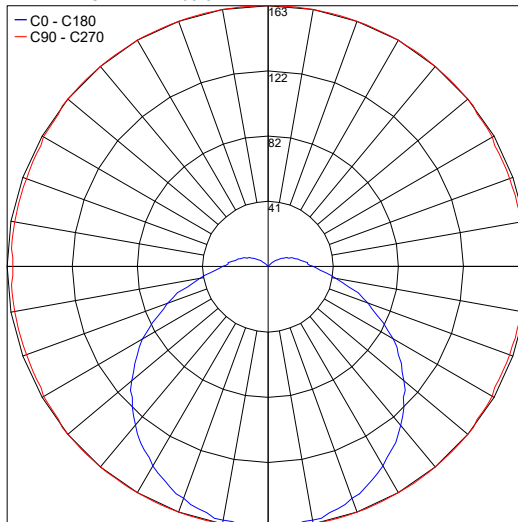

PHOTOMETRIC FILENAME : KAMI 1 4000K KA10POSDNB10X.IES

Job Name/Date:

Fixture Type Designation: