

Imperturbable light.

kami ceiling lamp

design by Landa R&D

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



kami

An extremely reliable, long-lasting, versatile product: a diffused almost natural light emitted by the polycarbonate opal screen supplied with or without grid. Technology and tradition, Kami illuminates rooms perfectly and can be either ceiling- or wall-mounted.

A precise geometry where light and shape complement each other, creating an imperturbable and never invasive light beam. Available with 10 W power, the die-cast aluminum body of Kami can be customized with various finishes, from white to black, for infinite aesthetic solutions.

KAMI | WALL LAMP





kami_1

DIFFUSE

| 10W



TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Delivered lumens

*Source lumens

Luminous efficacy

McADAM steps

Beam

CRI

Life time

IP rating

IK rating

DIFFUSE

LED 10W

13W

350mA, 50-60 Hz

On/Off • dimmable on request

3000 K • 4000 K • other colors on request

570 lm (1200 lm*) @ 3000 K

610 lm (1300 lm*) @ 4000 K

44 lm/W @ 3000 K

47 lm/W @ 4000 K

3


Diffuse

> 90

L70 > 50.000 h Ta 40°C

IP65

IK08


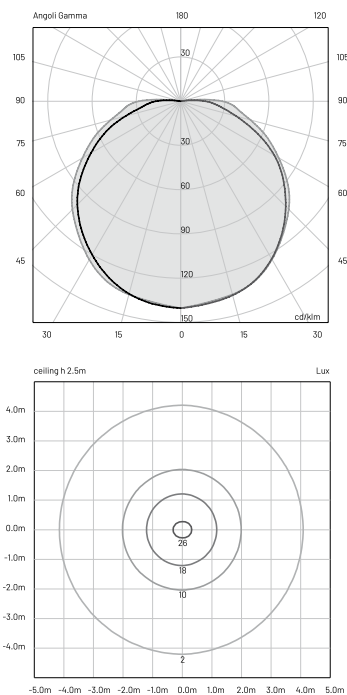


MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Opal polycarbonate
Finishing	Polyester powder paint

ORDER CODE

KA 1 0 POS D _ B A Z _		
Finishing	L	Graphite
	H	Gray
	V	Oxide
	G	Black
	U	White
Light color	N	4000 K
	H	3000 K
Example		KA 1 0 POS D H B A Z L

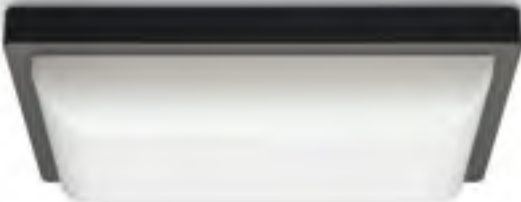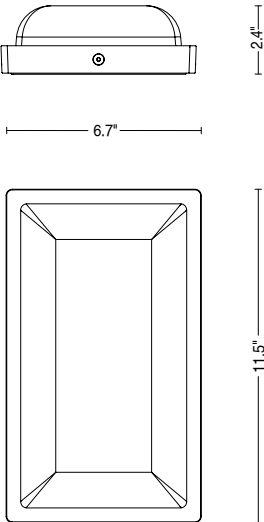

kami_2



DIFFUSE

| 10W



TECHNICAL SPECIFICATIONS

	DIFFUSE
Source lamp	LED 10W
Total wattage	13W
Voltage	350mA, 50-60 Hz
Control	On/Off • dimmable on request
Light color	3000 K • 4000 K • other colors on request
Delivered lumens	570 lm (1200 lm*) @ 3000 K
Source lumens	610 lm (1300 lm) @ 4000 K
Luminous efficacy	44 lm/W @ 3000 K 47 lm/W @ 4000 K
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

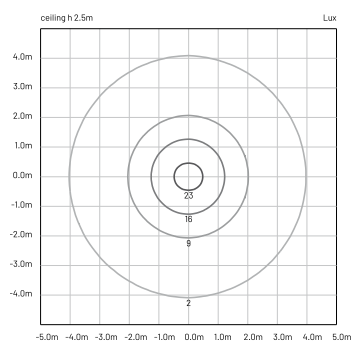

MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Opal polycarbonate
Finishing	Polyester powder paint

ORDER CODE

KA 2 0 POS D _ B A Z _	
Finishing	L Graphite
	H Gray
	V Oxide
	G Black
	U White
Light color	N 4000 K
	H 3000 K
Example	KA 2 0 POS D H B A Z L

