

# Imperturbable light.

kami ceiling lamp

design by Landa R&D

designplan 

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042



# kami

An extremely reliable, long-lasting, versatile product: a diffused almost natural light emitted by the polycarbonate opal screen supplied with or without grid. Technology and tradition, Kami illuminates rooms perfectly and can be either ceiling- or wall-mounted.

A precise geometry where light and shape complement each other, creating an imperturbable and never invasive light beam. Available with 10 W power, the die-cast aluminum body of Kami can be customized with various finishes, from white to black, for infinite aesthetic solutions.

KAMI | WALL LAMP





# kami\_1



DIFFUSE

# | 10W



## TECHNICAL SPECIFICATIONS

	<b>DIFFUSE</b>
Source lamp	LED 10W
Total wattage	13W
Voltage	350mA, 50-60 Hz
Control	On/Off • dimmable on request
Light color	3000 K • 4000 K • other colors on request
Delivered lumens	570 lm (1200 lm*) @ 3000 K
*Source lumens	610 lm (1300 lm*) @ 4000 K
Luminous efficacy	44 lm/W @ 3000 K 47 lm/W @ 4000 K
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08



## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Opal polycarbonate
Finishing	Polyester powder paint

## ORDER CODE

KA10POS D\_B10\_

Finishing



L	Graphite	●
H	Gray	●
V	Oxide	●
G	Black	●
U	White	○

Light color

N	4000 K
H	3000 K

Example

KA10POS DHB10L



# kami\_2



DIFFUSE

# | 10W



## TECHNICAL SPECIFICATIONS

	<b>DIFFUSE</b>
Source lamp	LED 10W
Total wattage	13W
Voltage	350mA, 50-60 Hz
Control	On/Off • dimmable on request
Light color	3000 K • 4000 K • other colors on request
Delivered lumens *Source lumens	570 lm (1200 lm*) @ 3000 K 610 lm (1300 lm*) @ 4000 K
Luminous efficacy	44 lm/W @ 3000 K 47 lm/W @ 4000 K
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

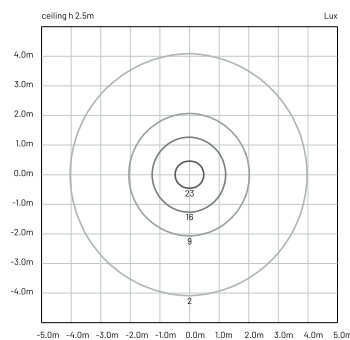

## MATERIALS


Body	Die-cast aluminum EN47100
Diffuser	Opal polycarbonate
Finishing	Polyester powder paint

## ORDER CODE

KA 2 0 POS D \_ B 1 0 \_


Finishing	L	Graphite	●
	H	Gray	●
	V	Oxide	●
	G	Black	●
	U	White	○
Light color	N	4000 K	
	H	3000 K	

Example KA 2 0 POS D H B 1 0 L



6.7"

2.5"



11.5"

