

Klak is an outdoor LED bollard offered in 3 different heights, 1-foot, 2-foot or 3-foot. It is offered in static white, dim to warm or RGB. Dark Sky compliant.




MADE IN THE U.S.A.

TECHNICAL DATA

Wattage	6W (Dim to Warm) 12W (Static White) 13W (RGB)
Power Supply	Integral 120VAC (Static White only) Remote, not included - See page 2 (350mA RGB, 350mA Dim to Warm, 350mA Static White)
Dimming	Dimming based on remote power selected. 0-10V Dimming - Integral (Static White Only)
Construction	Body: Aluminum Lens: Clear
CCT	2700K, 3000K, 4000K (static white) 3000K-1800K (dim to warm) RGB
BUG Rating	B0-U1-G0
CRI	>80
Delivered Lumens	172 lm (Static 3000K - 2 foot version) Dark Sky compliant
Efficacy	14.3 lm/W (Static 3000K - 2 foot version)
Optics	180°
Finishes	5 Standard - See page 3 Custom RAL on request
Fixture Dimensions	2.5" w x 2.2" or 12.0", 24.0" or 36.0" h
IP Rating	IP65

Fixture Dimensions

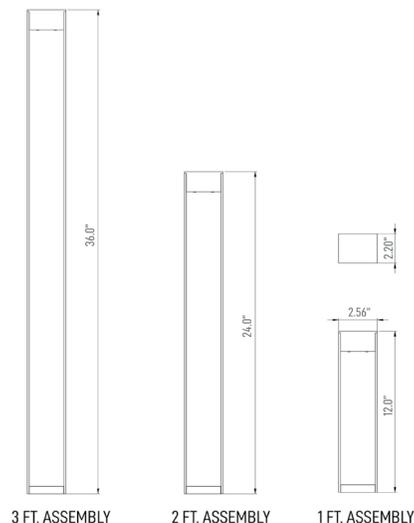

ORDERING INFORMATION

Example: KLK-L-1-40-02-C-0. Accessories / Power Supplies ordered separately.

KLK-L	-		-		-		-	0
-------	---	--	---	--	---	--	---	---

Model #	Height	CCT	Finish	Dimming	Options
KLK-L	1 - 1 ft.	27 - 2700K	11 - White Suede	R - <u>Remote</u> Driver (for Dim to Warm, RGB & Static White 1 ft. version) L - Lutron Dimming <u>Remote</u> Driver (Static White) C - Integral 120VAC - 0-10V Dimming For Static White Only (Not Available on 1 ft.)	0 - None
	2 - 2 ft.	30 - 3000K	02 - Black Suede		
	3 - 3 ft.	40 - 4000K	03 - Gray		
	RG - RGB	18 - Tex. Bronze			
	DW - Dim Warm (3000K-1800K)	TS - Silver C - Custom			

See page 2 for remote power supply options

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

Dim to Warm - 350mA Remote Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming (to 1.0%)	120-277VAC to 350mA, 10W, Class 2	1-1
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	1-2
PPLT00214	0-10V Dimming (to 10%)	120-277VAC to 350mA, 30W, Class 2	3-4
PPLT00561-P	0-10V Dimming (to 0.1%)	120-277VAC to (100-2000mA), 100W, Class 2	1-3

Lutron Compatible - Dim to Warm - 350mA Remote Driver

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-2

RGB - 350mA Remote Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00244-P	DMX / RDM (Must advise DMX addresses if not using RDM)	120-277VAC to 350mA, 50W, Class 2	1-4
PPLT00129-P	DMX / RDM (Field Addressable)	120-277VAC to 350mA, 100W, Class 2	1-4

Static White - 350mA Remote Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00468	Phase Dim (120V only)	120-277VAC to 350mA, 14W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-1
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
PPLT00168-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-2
PPLT00561-P	0-10V Dimming to (0.1%)	120-277VAC to (100-2000mA), 100W, Class 2	1-1

Lutron Compatible - Static White - 350mA Remote Driver


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1

For other power supply options consult factory.


Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation



AM-00010
Mounting Base
Assembly



FINISHES



18
Text. Bronze



03
Gray



02
Black Suede



TS
Silver




11
White Suede

PHOTOMETRIC DATA

Note: Photometry is 3000K

Maximum Candela = 368.1

— C0 - C180
— C90 - C270

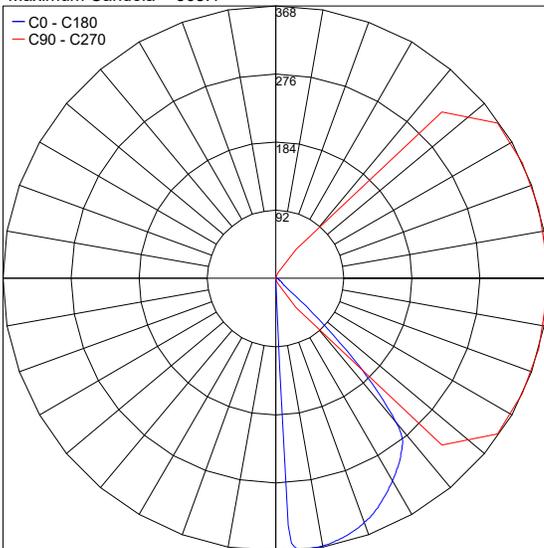

PHOTOMETRIC FILENAME : KLAK - 3000K 2FT INTEGRAL 120VAC.IES

Job Name/Date:

Fixture Type Designation: