

SUGGESTED POWER SUPPLIES

Dim to Warm - 350mA Remote Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming (to 1.0%)	120-277VAC to 350mA, 10W, Class 2	1-1
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	1-2
PPLT00214	0-10V Dimming (to 10%)	120-277VAC to 350mA, 30W, Class 2	3-4
PPLT00561-P	0-10V Dimming (to 0.1%)	120-277VAC to (100-2000mA), 100W, Class 2	1-3

Lutron Compatible - Dim to Warm - 350mA Remote Driver

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-2

RGB - 350mA Remote Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00244-P	DMX / RDM (Must advise DMX addresses if not using RDM)	120-277VAC to 350mA, 50W, Class 2	1-4
PPLT00129-P	DMX / RDM (Field Addressable)	120-277VAC to 350mA, 100W, Class 2	1-4

Static White - 350mA Remote Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00468	Phase Dim (120V only)	120-277VAC to 350mA, 14W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-1
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
PPLT00168-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-2
PPLT00561-P	0-10V Dimming to (0.1%)	120-277VAC to (100-2000mA), 100W, Class 2	1-1

Lutron Compatible - Static White - 350mA Remote Driver


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1

For other power supply options consult factory.


Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation



AM-00010
Mounting Base
Assembly



FINISHES



18
Text. Bronze



03
Gray



02
Black Suede



TS
Silver




11
White Suede

PHOTOMETRIC DATA

Note: Photometry is 3000K

Maximum Candela = 368.1

— C0 - C180
— C90 - C270

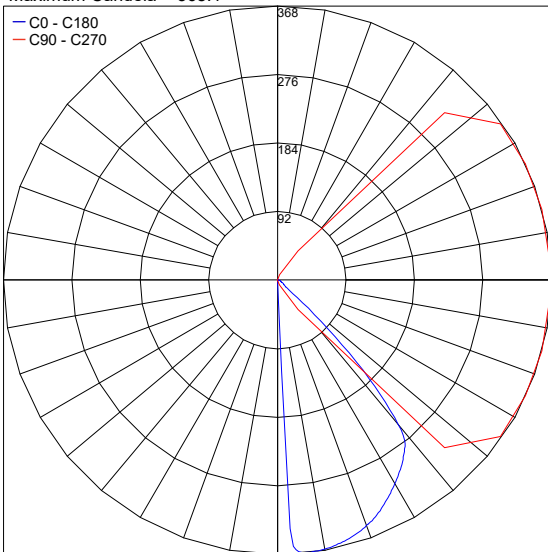

PHOTOMETRIC FILENAME : KLAK - 3000K 2FT INTEGRAL 120VAC.IES

Job Name/Date:

Fixture Type Designation: