

Klak is an outdoor LED bollard offered in 3 different heights, 1-foot, 2-foot or 3-foot. It is offered in static white, dim to warm or RGB. Dark Sky compliant for output below 80°.


TECHNICAL DATA

Wattage	6W (Dim to Warm) 12W (Static White) 13W (RGB)
Power Supply	Integral 120VAC (Static White only) Remote, not included - See page 2 (350mA RGB, 350mA Dim to Warm, 350mA Static White)
Dimming	Dimming based on remote power selected. 0-10V Dimming - Integral (Static White Only)
Construction	Body: Aluminum Lens: Clear
CCT	2700K, 3000K, 4000K (static white) 3000K-1800K (dim to warm) RGB
BUG Rating	B0-U1-G0
CRI	>80
Delivered Lumens	172 lm (Static 3000K - 2 foot version) Dark Sky compliant, output below 80°
Efficacy	14.3 lm/W (Static 3000K - 2 foot version)
Optics	180°
Finishes	5 Standard, Custom RAL on request
Fixture Dimensions	2.5" w x 2.2" or 12.0", 24.0" or 36.0" h
IP Rating	IP65



MADE IN THE U.S.A.

Fixture Dimensions

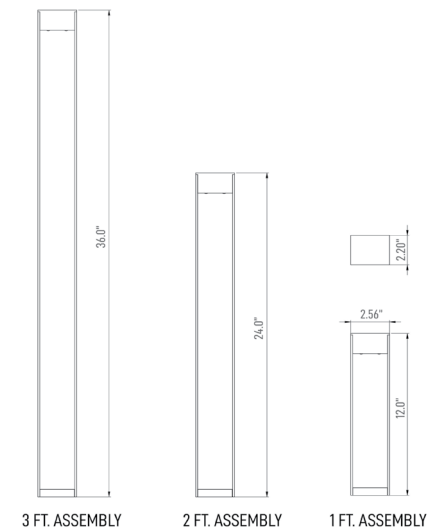

ORDERING INFORMATION

Example: KLK-L-1-40-02-C-0. Accessories / Power Supplies ordered separately.

KLK-L	-		-		-		-	0
-------	---	--	---	--	---	--	---	---

Model #	Height	CCT	Finish	Dimming	Options
KLK-L	1 - 1 ft. 2 - 2 ft. 3 - 3 ft.	27 - 2700K 30 - 3000K 40 - 4000K RG - RGB DW - Dim Warm (3000K-1800K)	11 - White Suede 02 - Black Suede 03 - Gray 18 - Tex. Bronze TS - Silver C - Custom	R - <u>Remote</u> Driver (for Dim to Warm, RGB & Static White 1 ft. version) L - Lutron Dimming <u>Remote</u> Driver (Static White) C - Integral 120VAC - 0-10V Dimming For Static White Only (Not Available on 1 ft.) See page 2 for remote power supply options	0 - None

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

Dim to Warm - 350mA Remote Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming (to 1.0%)	120-277VAC to 350mA, 10W, Class 2	1-1
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	1-2
PPLT00214	0-10V Dimming (to 10%)	120-277VAC to 350mA, 30W, Class 2	3-4
PPLT00561-P	0-10V Dimming (to 0.1%)	120-277VAC to (100-2000mA), 100W, Class 2	1-3

Lutron Compatible - Dim to Warm - 350mA Remote Driver

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-2

RGB - 350mA Remote Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00244-P	DMX / RDM (Must advise DMX addresses if not using RDM)	120-277VAC to 350mA, 50W, Class 2	1-4
PPLT00129-P	DMX / RDM (Field Addressable)	120-277VAC to 350mA, 100W, Class 2	1-4

Static White - 350mA Remote Drivers

Part Number	Description	Input/Output	# of Fixtures
PPLT00139	0-10V Dimming to 10%	120-277VAC to 350mA, 12W, Class 2	1-1
PPLT00468	Phase Dim (120V only)	120-277VAC to 350mA, 14W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-1
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
PPLT00168-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-2
PPLT00561-P	0-10V Dimming to (0.1%)	120-277VAC to (100-2000mA), 100W, Class 2	1-1

Lutron Compatible - Static White - 350mA Remote Driver


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1

For other power supply options consult factory.


Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation



AM-00008
Mounting Base
Assembly




PHOTOMETRIC DATA

Note: Photometry is 3000K

Maximum Candela = 368.1

— C0 - C180
— C90 - C270

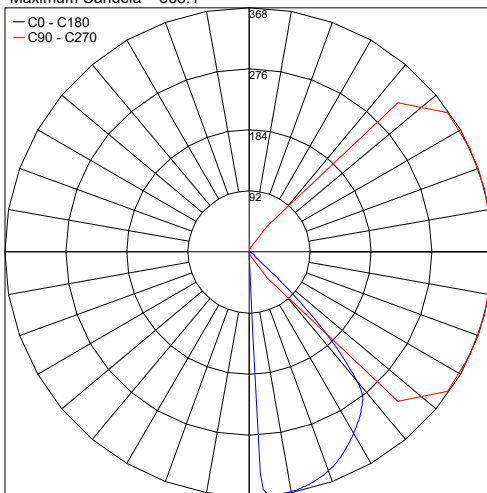

PHOTOMETRIC FILENAME : KLAK - 3000K 2FT INTEGRAL 120VAC.IES

Job Name/Date:

Fixture Type Designation: