

KOCCA 1.2



Kocca is a square wall-mounted fixture with a pared-down design for outdoor use. It offers 1, 2, 3 and 4 beam options in two sizes and wattages. It can be coordinated with the Linear line of bollards.

TECHNICAL DATA

Wattage / Input	7W, 15W (120VAC)
Power Supply	Integral
Construction	Body: Die-cast Aluminum Alloy EN AB 47100 Lens: Serigraphed, tempered extra-clear glass (optics) Serigraphed, tempered extra-clear glass with opal PMMA (diffuse)
CCT	2700K, 3000K, 4000K (3500K available, consult factory)
CRI	>80
Delivered Lumens	119 lm per beam (3000K, 7W, 70°) 382 lm per beam (3000K, 15W, 70°) 478 lm per beam (3000K, 15W, Diffuse)
Efficacy	29.8 lm/W per beam (3000K, 7W, 70°) 44.9 lm/W per beam (3000K, 15W, 70°) 56.2 lm/W per beam (3000K, 15W, Diffuse)
Optics	4 Standard (see below)
Finishes	4 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Fixture Dimensions	4.72" l x 3.94" w x 3.94" h
Fixture Weight	3.66 lbs
LED Source	2 Power LEDs (7W) 2 High Intensity LEDs (15W)
Lumen Maintenance	L80 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN (7W), 3-Step MacAdam (15W)
Operating Temp.	-4°F to +113°F
IP Rating	IP65
IK Rating	IK07



Fixture Dimensions

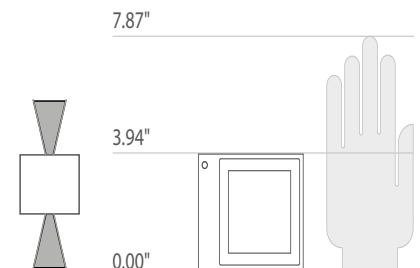

ORDERING INFORMATION

Example: KA1215KE.

KA121				
Model No.	Wattage	CCT	Optics	Finish
KA121	0 - 7W 1 - 15W	F - 2700K 5 - 3000K 9 - 4000K	W - Asymmetrical 10° K - Asymmetrical 70° (7W only) A - Asymmetrical 140° D - Diffuse (15W only)	E - White F - Gray H - Anthracite T - Corten C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA



Note all Photometry is 3000K

7W, per beam




h 78.74"

W - Asymmetrical 10°




h 78.74"

K - Asymmetrical 70°



h 78.74"

A - Asymmetrical 140°



Illuminance pseudo colors





15W, per beam





h 78.74"

W - Asymmetrical 10°





h 78.74"

K - Asymmetrical 70°




h 78.74"

A - Asymmetrical 140°



h 78.74"

D - Diffuse

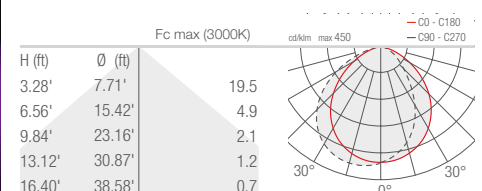

Job Name/Date:

Fixture Type Designation: