



Kocca is a square wall-mounted fixture with a pared-down design for outdoor use. It offers 1, 2, 3 and 4 beam options in two sizes and wattages. It can be coordinated with the Linear line of bollards.

TECHNICAL DATA

Wattage / Input	15W, 21W, 36W (120VAC)
Power Supply	Integral
Construction	Body: Die-cast aluminum alloy EN AB 47100 Lens: Serigraphed, tempered extra-clear glass
CCT	2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	441 lm per beam (3000K, 15W, Diffuse) 631 lm per beam (3000K, 21W, 30°) 1137 lm per beam (3000K, 36W, 30°)
Efficacy	29.4 lm/W per beam (3000K, 15W, Diffuse) 30.0 lm/W per beam (3000K, 21W, 30°) 31.6 lm/W per beam (3000K, 36W, 30°)
Optics	3 Standard (see below)
Finishes	4 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Fixture Dimensions	6.69" l x 5.91" w x 5.91" h
Fixture Weight	7.72 lbs
LED Source	10 (5+5) (21W), 18 (9+9) (36W) Power LEDs Power LED Matrix (15W)
Lumen Maintenance	L80 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	-4°F to +113°F
IP Rating	IP65
Impact Rating	IK06



Fixture Dimensions

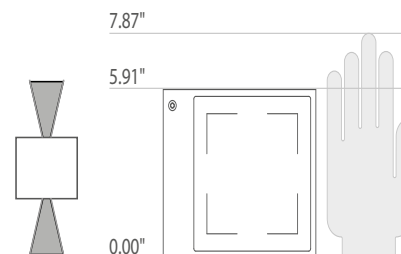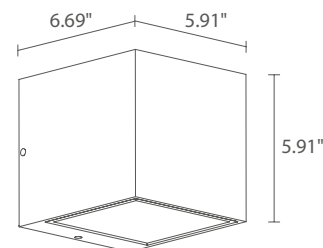

ORDERING INFORMATION

Example: KA32105SE. Accessories ordered separately.


KA321				
Model No.	Wattage	CCT	Optics	Finish
KA321	0 - 15W (Diffuse only) 0 - 21W 1 - 36W	F - 2700K 5 - 3000K 9 - 4000K	T - 7° S - 10° F - 30° D - Diffuse (15W only)	E - White F - Gray H - Anthracite T - Corten C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Installation



WD0400__

Spacer

For spacer include one of the below finishes:

E - White

F - Gray

H - Anthracite


T - Cor-ten

C - Custom RAL


PHOTOMETRIC DATA

Note all Photometry is 3000K, per beam


T - 7°

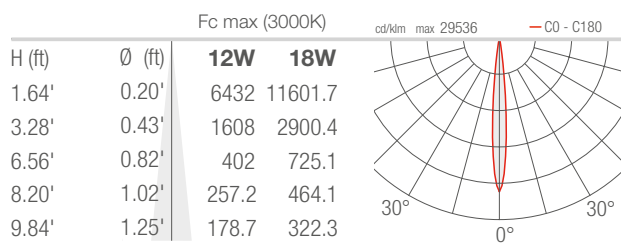


S - 10°

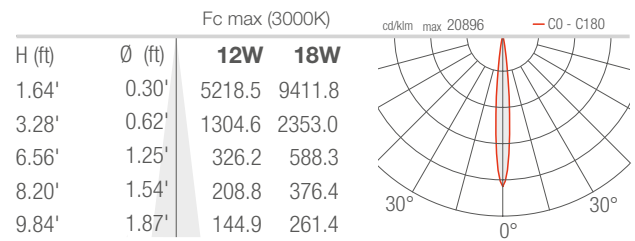

F - 30°

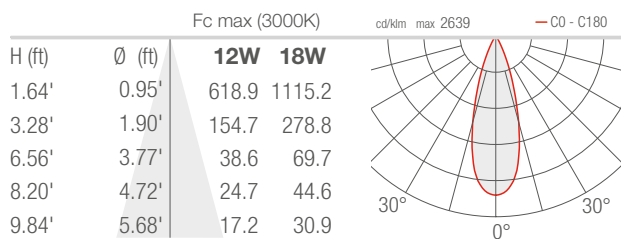

D - Diffuse

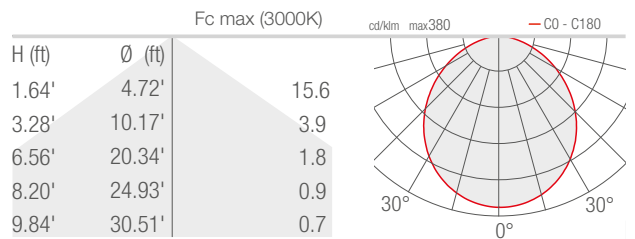

Job Name/Date:

Fixture Type Designation: