



Kocca is a square wall-mounted fixture with a pared-down design for outdoor use. It offers 1, 2, 3 and 4 beam options in two sizes and wattages. It can be coordinated with the Linear line of bollards.

TECHNICAL DATA

Wattage / Input	30W (Diffuse only), 40W (120VAC)
Power Supply	Integral
Construction	Body: Die-cast aluminum alloy EN AB 47100 Lens: Serigraphed, tempered extra-clear glass
CCT	2700K, 3000K, 4000K
CRI	>80
BUG Rating	B1-U4-G3 (3000K, 40W, 7°, 10°) B1-U4-G2 (3000K, 40W, 30°) B1-U4-G1 (3000K, 30W, Diffuse)
Delivered Lumens	441 lm per beam (3000K, 30W, Diffuse) 631 lm per beam (3000K, 40W, 30°)
Efficacy	14.7 lm/W per beam (3000K, 30W, Diffuse) 15.8 lm/W per beam (3000K, 40W, 30°)
Optics	4 Standard (see below)
Finishes	4 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Fixture Dimensions	6.69" l x 5.91" w x 5.91" h
Fixture Weight	8.82 lbs
LED Source	Power LED Matrix (30W) 20 (5+5+5+5) Power LEDs (40W)
Lumen Maintenance	L80 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	-4°F to +113°F
IP Rating	IP65
IK Rating	IK06



Fixture Dimensions

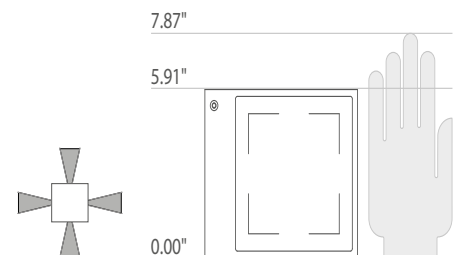

ORDERING INFORMATION

Example: KA3410FSE. Accessories ordered separately.


KA3410			
Model No.	CCT	Optics	Finish
KA3410	F - 2700K 5 - 3000K 9 - 4000K	T - 7° S - 10° F - 30° D - Diffuse (30W)	E - White F - Gray H - Anthracite T - Corten C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Installation



WD0400__

Spacer

For spacer include one of the below finishes:

E - White

F - Gray

H - Anthracite


T - Cor-ten

C - Custom RAL


PHOTOMETRIC DATA

Note all Photometry is 3000K, per beam


T - 7°

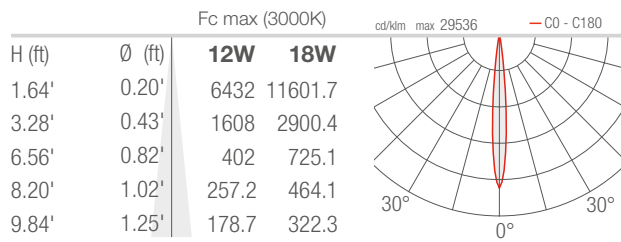


S - 10°

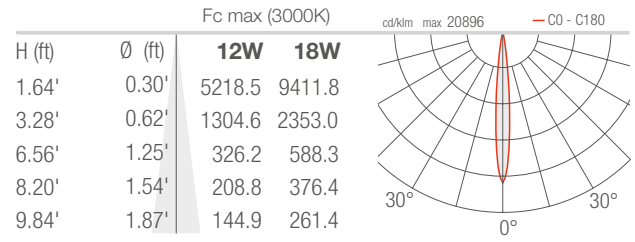

F - 30°

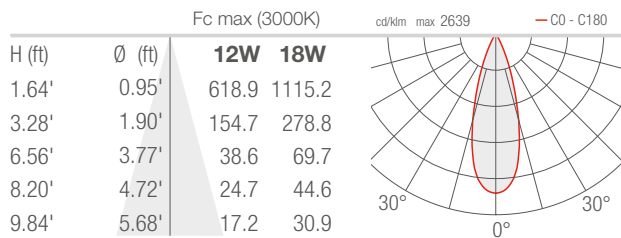

D - Diffuse

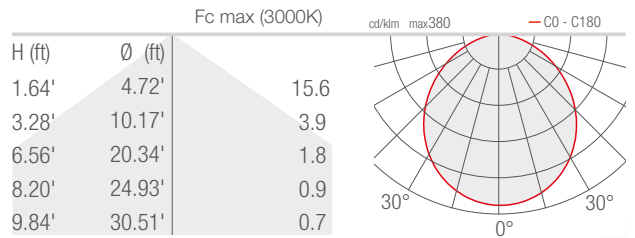

Job Name/Date:

Fixture Type Designation: