

OUTDOOR WALL-MOUNTED FIXTURES WITH DIFFERENT OUTPUTS

2700K 3000K 4000K

HEIGHT 3.94 in

HEIGHT 5.91 in



KOCCA 1.1
4W/8.5W 120VAC



diffuse



asymmetrical



KOCCA 3.1
12W/18W 120VAC



ultra-narrow



narrow



medium



diffuse



KOCCA 1.2
7W/15W 120VAC



diffuse



asymmetrical



KOCCA 3.2
15W/21W/36W 120VAC



ultra-narrow




narrow



medium




diffuse



KOCCA 1.3
10W 120VAC



asymmetrical



KOCCA 1.4
13W 120VAC



asymmetrical



KOCCA 3.4
30W/40W 120VAC



ultra-narrow



narrow



medium





diffuse

7.87

3.94

0 in

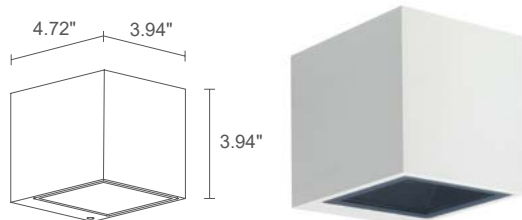

KOCCA 1.1

CB

3.97 lbs

IP65

IK07



POWER / MODEL CODE

4W 120VAC optics version

KA1110 **E** White**KA1110** **F** Grey**KA1110** **H** Anthracite**KA1110** **T** Cor-ten

8.5W 120VAC optics version

KA1111 **E** White**KA1111** **F** Grey**KA1111** **H** Anthracite**KA1111** **T** Cor-ten

8.5W 120VAC diffuse

KA1111 **D E** White**KA1111** **D F** Grey**KA1111** **D H** Anthracite**KA1111** **D T** Cor-ten

LED COLOR

F - 2700K**5** - 3000K**9** - 4000K

OPTICS

W - asymmetrical, 10°**K** - asymmetrical, 70° (only 4W version)**A** - asymmetrical, 140°

LUMEN OUTPUT AT SOURCE

184 lm (3000K, 4W)

657 lm (3000K, 8.5W)

DELIVERED LUMEN OUTPUT

102 lm (3000K, 140° asymmetrical, 4W)

323 lm (3000K, 140° asymmetrical, 8.5W)

478 lm (3000K, diffuse optics)

NO. AND TYPE OF LED

1 power LED, 1/4 ANSI BIN (4W version)

1 high-intensity power LED

3-step MacAdam (8.5W version)

50000h L90 B10 (Ta 25°C)

MATERIAL

body in die-cast aluminum

lens in serigraphed and transparent, tempered extra-clear glass (optics version)

lens in serigraphed, tempered extra-clear glass and opal PMMA (diffuse version)

POWER SUPPLY UNIT

built in

POWER CABLES

connection box with 1.64 ft cable
H05RN-F 2x0.03 Ø0.25 in

MOUNTING

surface mounted (wall)

NOTES

Casambi-compatible version, controllable with the Casambi app, available on request

KOCCA 1.2

CB

3.66 lbs

IP65

IK07



7W 120VAC optics version

KA1210 **E** White**KA1210** **F** Grey**KA1210** **H** Anthracite**KA1210** **T** Cor-ten

15W 120VAC optics version

KA1211 **E** White**KA1211** **F** Grey**KA1211** **H** Anthracite**KA1211** **T** Cor-ten

15W 120VAC diffuse

KA1211 **D E** White**KA1211** **D F** Grey**KA1211** **D H** Anthracite**KA1211** **D T** Cor-ten

LED COLOR

F - 2700K**5** - 3000K**9** - 4000K

OPTICS

W - asymmetrical, 10°**K** - asymmetrical, 70° (only 7W version)**A** - asymmetrical, 140°

368 lm (3000K, 7W)

1314 lm (3000K, 15W)

204 lm (3000K, 140° asymmetrical, 7W)

646 lm (3000K, 140° asymmetrical, 15W)

956 lm (3000K, diffuse optics)

2 power LEDs, 1/4 ANSI BIN (7W version)

2 high-intensity power LEDs

3-step MacAdam (15W version)

50000h L90 B10 (Ta 25°C)

body in die-cast aluminum

lens in serigraphed and transparent, tempered extra-clear glass (optics version)

lens in serigraphed, tempered extra-clear glass and opal PMMA (diffuse version)

built in


connection box with 1.64 ft cable
H05RN-F 2x0.03 Ø0.25 in

surface mounted (wall)

Casambi-compatible version, controllable with the Casambi app, available on request



Designplan | L&L Luce&Light




KOCCA 1.3

CB




10W 120VAC optics version
KA1310 ■ **E** White
KA1310 ■ **F** Grey
KA1310 ■ **H** Anthracite
KA1310 ■ **T** Corten




KOCCA 1.4


CB




13W 120VAC optics version
KA1410 ■ **E** White
KA1410 ■ **F** Grey
KA1410 ■ **H** Anthracite
KA1410 ■ **T** Corten



10° asymmetrical optics



70° asymmetrical optics



140° asymmetrical optics

■	F - 2700K 5 - 3000K 9 - 4000K
■	W - asymmetrical, 10° K - asymmetrical, 70° A - asymmetrical, 140°

552 lm (3000K)

357 lm (3000K, 70° asymmetrical)

3 power LEDs
 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

body in die-cast aluminum
 lens in serigraphed and transparent, tempered extra-clear glass

built in

connection box with 1.64 ft cable
 H05RN-F 2x0.03 Ø0.25 in

surface mounted (wall)

Casambi-compatible version, controllable with the Casambi app, available on request

■	F - 2700K 5 - 3000K 9 - 4000K
■	W - asymmetrical, 10° K - asymmetrical, 70° A - asymmetrical, 140°

736 lm (3000K)

476 lm (3000K, 70° asymmetrical)

4 power LEDs
 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

body in die-cast aluminum
 lens in serigraphed and transparent, tempered extra-clear glass



built in

connection box with 1.64 ft cable
 H05RN-F 2x0.03 Ø0.25 in

surface mounted (wall)

Casambi-compatible version, controllable with the Casambi app, available on request



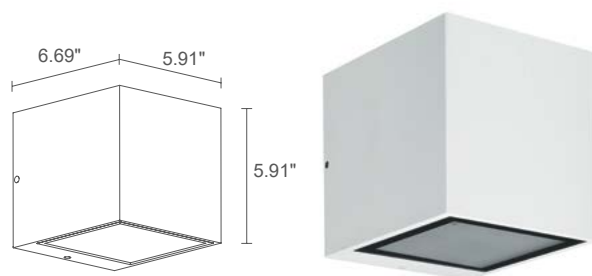

KOCCA 3.1



CB



8.49 lbs

IP65

IK06



POWER / MODEL CODE

12W 120VAC diffuse

KA3110 **D E** White

KA3110 **D F** Grey

KA3110 **D H** Anthracite

KA3110 **D T** Cor-ten

12W 120VAC optics version

KA3110 **E** White

KA3110 **F** Grey

KA3110 **H** Anthracite

KA3110 **T** Cor-ten

18W 120VAC optics version

KA3111 **E** White

KA3111 **F** Grey

KA3111 **H** Anthracite

KA3111 **T** Cor-ten

LED COLOR

F - 2700K

S - 3000K

9 - 4000K

OPTICS

T - 7°

S - 10°

F - 30°

LUMEN OUTPUT AT SOURCE

727 lm (3000K, optics version, 12W)
1308 lm (3000K, optics version, 18W)
625 lm (3000K, diffuse version)

DELIVERED LUMEN OUTPUT

631 lm (3000K, 30°, 12W)
1137 lm (3000K, 30°, 18W)
441 lm (3000K, diffuse optics)

NO. AND TYPE OF LED

5, 9 power LEDs (optics version)
power LED matrix (diffuse version)
1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

MATERIAL

body in die-cast aluminum
lens in serigraphed and transparent, tempered
extra-clear glass (optics version)
lens in serigraphed, sandblasted, tempered
extra-clear glass (diffuse version)

POWER SUPPLY UNIT

built in

POWER CABLES

connection box with 1.64 ft cable
H05RN-F 2x0.03 Ø.25 in

MOUNTING

surface mounted (wall)

ACCESSORIES

see accessories page


NOTES

DALI and 0-10V versions available on request
spacer with RAL finish available on request
Casambi-compatible version, controllable with
the Casambi app, available on request

✓
KOCCA 3.1
3000K, 18W, 7°, anthracite
TAK 1.1
3000K, 18W, 70°, anthracite
Project by / Amatori Architettura d'Interni
Light planning by / Litek
Listrop Viaggi & Turismo, Rosà, Vicenza, Italy



Designplan | L&L Luce&Light

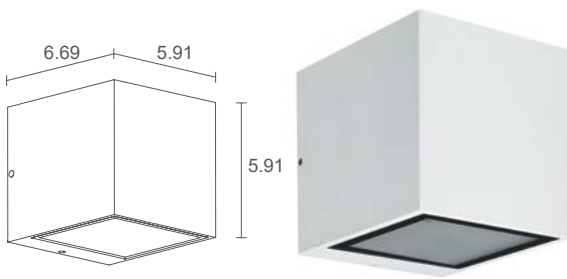

KOCCA 3.2



CB



8.93 lbs IP65 IK06



15W 120VAC diffuse

KA3210 **D E** White
KA3210 **D F** Grey
KA3210 **D H** Anthracite
KA3210 **D T** Cor-ten

21W 120VAC optics version

KA3210 **E** White
KA3210 **F** Grey
KA3210 **H** Anthracite
KA3210 **T** Cor-ten

36W 120VAC optics version

KA3211 **E** White
KA3211 **F** Grey
KA3211 **H** Anthracite
KA3211 **T** Cor-ten

F - 2700K
S - 3000K
9 - 4000K
T - 7°
S - 10°
F - 30°

1250 lm (3000K, diffuse version)
 1454 lm (3000K, optics version, 21W)
 2616 lm (3000K, optics version, 36W)

1262 lm (3000K, 30°, 21W)
 2274 lm (3000K, 30°, 36W)
 882 lm (3000K, diffuse optics)

10, 18 power LEDs (optics version)
 matrice power LED (diffuse version)
 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

body in die-cast aluminum
 lens in serigraphed and transparent, tempered
 extra-clear glass (optics version)
 lens in serigraphed, sandblasted, tempered
 extra-clear glass (diffuse version)


built in

connection box with 1.64 in cable
 H05RN-F 2x0.03 Ø0.25 in


surface mounted (wall)

see accessories page

DALI and 0/1-10V versions available on request
 spacer with RAL finish available on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request

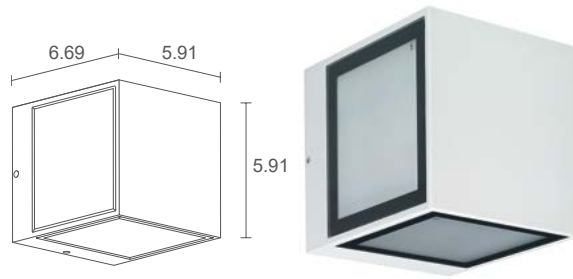

KOCCA 3.4



CB



9.81 lbs IP65 IK06



30W 120VAC diffuse

40W 120VAC optics version

KA3410 **E** White
KA3410 **F** Grey
KA3410 **H** Anthracite
KA3410 **T** Cor-ten

F - 2700K
S - 3000K
9 - 4000K
T - 7°
S - 10°
F - 30°
D - diffuse

2500 lm (3000K, diffuse version)
 2908 lm (3000K, optics version)

1764 lm (3000K, diffuse optics)
 2524 lm (3000K, 30°)

20 power LEDs (optics version)
 power LED matrix (diffuse version)
 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

body in die-cast aluminum
 lens in serigraphed and transparent, tempered
 extra-clear glass (optics version)
 lens in serigraphed, sandblasted, tempered
 extra-clear glass (diffuse version)

built in

connection box with 1.64 ft cable
 H05RN-F 2x0.03 Ø0.25 in

surface mounted (wall)

see accessories page

spacer with RAL finish available on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request





ACCESSORIES

ACCESSORIES FOR INSTALLATION




WD0400E - White
WD0400F - Grey
WD0400H - Anthracite
WD0400T - Corten


Spacer
 RAL finish available on request
 (Kocca 3)

KOCCA 1: INSTALLATION AT A HEIGHT OF 2 METRES


4W - asymmetrical, 10°

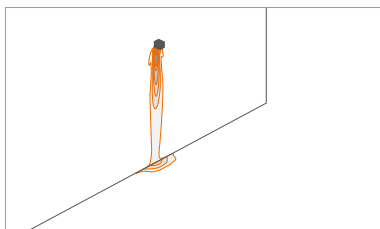


4W - asymmetrical, 70°

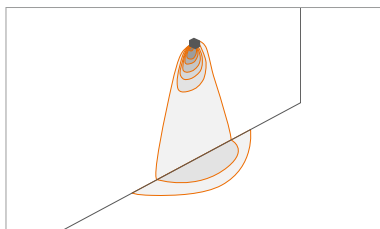


4W - asymmetrical, 140°

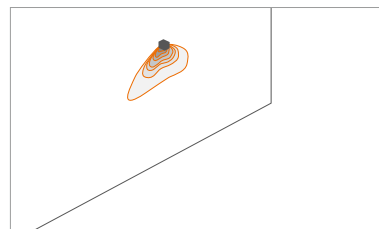


8.5W - asymmetrical, 10°

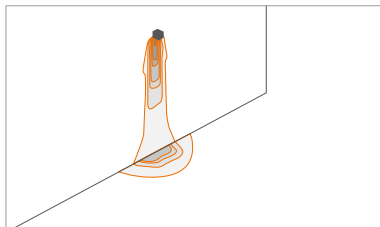

8.5W - asymmetrical, 140°

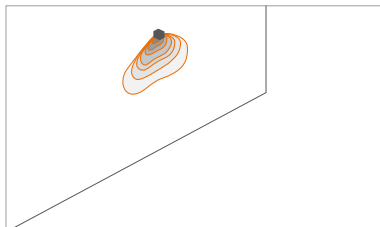


8.5W - diffuse

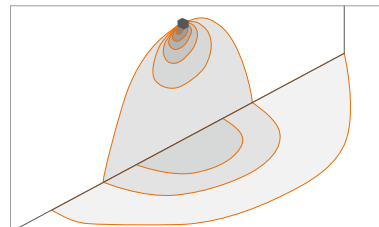


KOCCA 1.1 4W

W - Asymmetrical 10°




K - Asymmetrical 70°

Lux max (3000K)




Lux max (3000K)

A - Asymmetrical 140°




KOCCA 1.1 8.5W


W - Asymmetrical 10°



A - Asymmetrical 140°




D - Diffuse / Diffusa

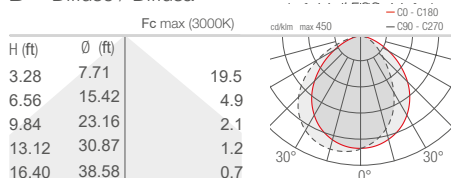


KOCCA 3.1


T - 7°

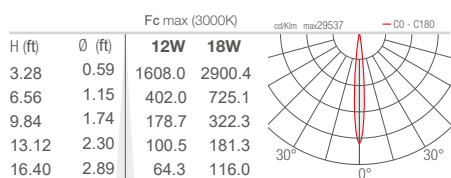

S - 10°

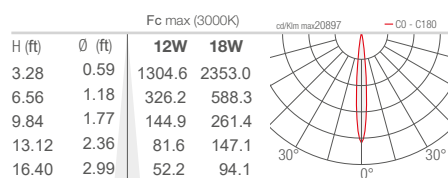

F - 30°

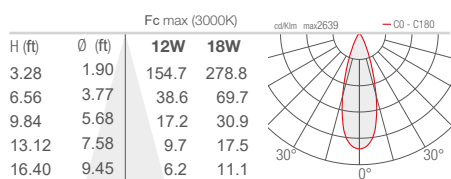

D - Diffuse

