



L1

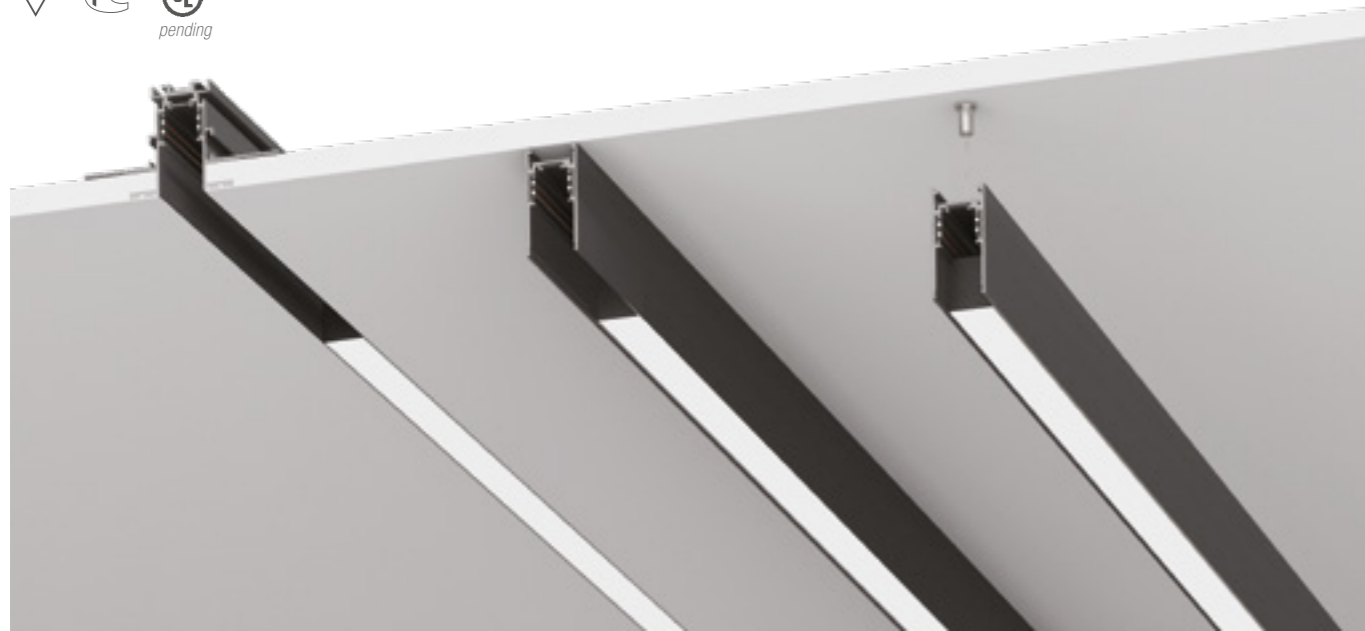

- matte white painted
- matte black painted

TOTALLY RECESSED INTO TRACKS

L1 is a linear LED module for interiors, suitable to be installed on a 48V track. It is available in two lengths (22.2" and 44.5") and in two different finishes (black and white). L1 is composed of a high efficiency LED and an opal closure screen which diffuses an even light in the space where it is installed.

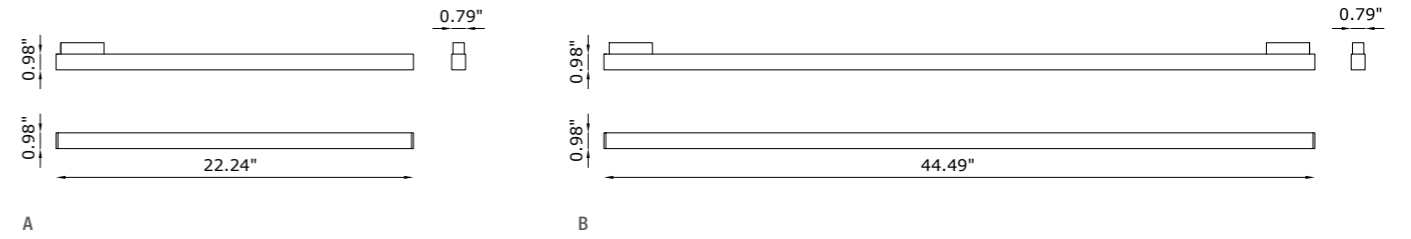

CODE COMPOSITION

BUT048 L 00014 _00_ 0	
<i>dimmiability</i>	
ND	non dimmable
DA	DALI
<i>light color</i>	
27	2700K
30	3000K
40	4000K
<i>finishing</i>	
W1	white
B1	black
BUT048 L 00015 _00_ 0	
<i>dimmiability</i>	
ND	non dimmable
11	0-10V
DA	DALI
<i>light color</i>	
27	2700K
30	3000K
40	4000K
<i>finishing</i>	
W1	white
B1	black

example of code composition BUT048 L 00014 **W1** 00 **27** **ND** 0

TECHNICAL FEATURES

Code	BUT048 L 00014 XX	BUT048 L 00015 XX
Type	(fig.A) LED module	(fig.B) LED module
Material	Aluminum	Aluminum
Finishing	White Black	White Black
Weight	0.88 lbs	1.76 lbs
Mounting	Track 48V	Track 48V
IP rating	IP20	IP20
Control gear	Electronic driver on board (included)	Electronic driver on board (included)
Lamp type	LED	LED
Lamp wattage	12W	24W
Luminous efficacy	1500 lm - 3000K	3000 lm - 3000K
Light distribution	Opal screen diffused	Opal screen diffused
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	48 VDC	48 VDC
CRI	>90	>90
UGR	<29	<29
Emergency	-	-
Note	Suitable for B-INSIDE and B-55.	Suitable for B-INSIDE and B-55.

