


LAM Phantom Linear is a wall or ceiling mounted LED luminaire which delivers uniformity of light distribution and performance. It comes in 5 standard finishes and 3 sizes that can be used to create unique combinations on its own or with other Phantom shapes. **ADA compliant.**



Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage / Input	6.5W, 13W, 19.5W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum Lens: Extra Clear Acrylic Cable Length: 1.64'
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U2-G0
Delivered Lumens	996 lm (3000K - Phantom Linear 1) 1992 lm (3000K - Phantom Linear 2) 2988 lm (3000K - Phantom Linear 3)
Efficacy	153.2 lm/W (3000K - Linear 1) 153.2 lm/W (3000K - Linear 2) 153.2 lm/W (3000K - Linear 3)
Optics	Diffuse
Finishes	5 Standard, See Below
Fixture Dimensions	11.8", 23.6", 35.4" l w x 3.9" w x 2.4" h
Color Consistency	<3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK07

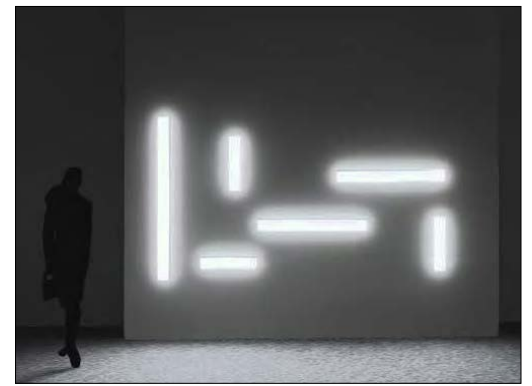

ORDERING INFORMATION


Example: LM01.104459.US.04.DI.BF.

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Model No.	Finish	Optic	CCT
LM01.104458.US (Linear 1 - 6.5W)	01 - White	DI - Diffuse	BC - 2700K
LM01.104459.US (Linear 2 - 13W)	02 - Black		BP - 3000K
LM01.104460.US (Linear 3 - 19.5W)	03 - Gray		BF - 4000K
	04 - Cor-ten		
	11 - Anthracite		


Job Name/Date:

Fixture Type Designation:


FIXTURE DIMENSIONS

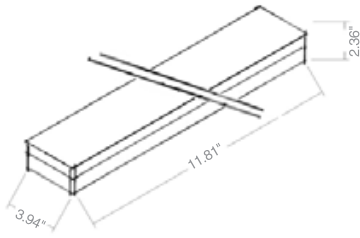

11.81" x 3.94" x H2.36"

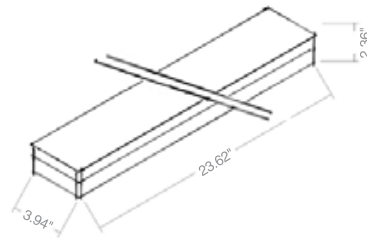

23.62" x 3.94" x H2.36"

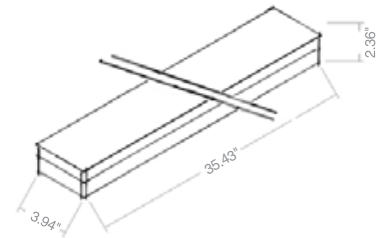

35.43" x 3.94" x H2.36"

SUGGESTED POWER SUPPLIES

24VDC


Part Number	Description	Input/Output	# of Fixtures		
			Lin. 1	Lin. 2	Lin. 3
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-2	1-1	—
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-3	1-1	1-1
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-7	1-3	1-2
PPLT00599	ELV/TRIAC & 0-10V Dimming (100-0%)	120-277VAC to 24VDC, 60W, Class 2	1-11	1-5	1-3
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-12	1-6	1-4
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-12	1-6	1-4

For other power supply options consult factory.

PHOTOMETRIC DATA

Linear 1


Maximum Candela = 192.0

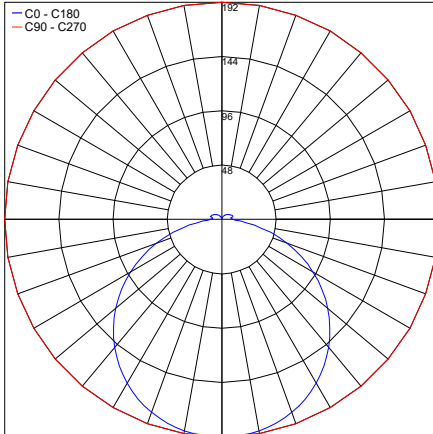

PHOTOMETRIC FILENAME : PHANTOM LINEAR 1 LM01.104458.XX.DLXX 11.81IN.IES

Linear 2


Maximum Candela = 192.0

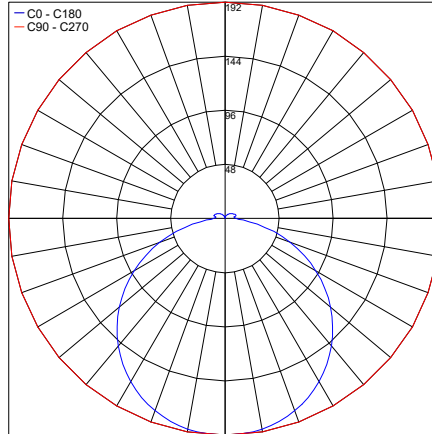

PHOTOMETRIC FILENAME : PHANTOM LINEAR 2 LM01.104459.XX.DLXX 23.61IN.IES

Linear 3

Maximum Candela = 192.0

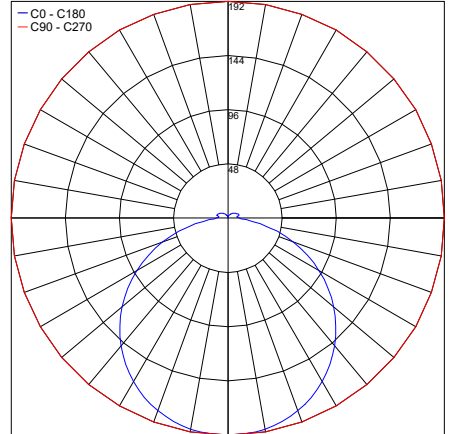

PHOTOMETRIC FILENAME : PHANTOM LINEAR 3 LM01.104460.XX.DLXX 35.41IN.IES

Job Name/Date:

Fixture Type Designation: