

LL1 is an ingrade uplight made of extruded aluminum which is offered in 2 ft. or 4 ft. lengths. Driveover rated for 11,000 lbs. Suitable for power washing.

## TECHNICAL DATA

|                           |                                                                     |
|---------------------------|---------------------------------------------------------------------|
| <b>Wattage / Input</b>    | 9W per foot (500mA - 2 ft, 1000mA - 4 ft)                           |
| <b>Power Supply</b>       | Remote, not included. See page 3.                                   |
| <b>Construction</b>       | Body: Extruded Aluminum<br>Lens: 0.5" Low Iron Clear Tempered Glass |
| <b>CCT</b>                | 3000K, 4000K, 5000K                                                 |
| <b>CRI</b>                | >80                                                                 |
| <b>Delivered Lumens</b>   | Coming Soon                                                         |
| <b>Efficacy</b>           | Coming Soon                                                         |
| <b>Optics</b>             | None                                                                |
| <b>Finishes</b>           | Gray Epoxy Polyester Finish                                         |
| <b>Fixture Dimensions</b> | 2.0', 4.0' x 4.13" h                                                |
| <b>LED Source</b>         | Samsung 2323 Mid Power LED                                          |
| <b>IP Rating</b>          | IP68, IP69K (Tested to EN / IEC 60598-1)                            |
| <b>Driveover Rated</b>    | Up to 11,000 lbs                                                    |



**MADE IN THE U.S.A.**

Fixture Dimensions  
2.0' or 4.0' l x 4.13" h  
See Full Drawing on page 2

## ORDERING INFORMATION


Example: LL1-L-2-40-4-GE-0-X-J-0.

| LL1-L   | -                            |                                        | -                     |                    | 4        | -                    | GE                                                                             | -        | 0 | - | X | - |  | - | 0 |
|---------|------------------------------|----------------------------------------|-----------------------|--------------------|----------|----------------------|--------------------------------------------------------------------------------|----------|---|---|---|---|--|---|---|
| Model # | Length                       | CCT                                    | Body                  | Finish             | Optics   | Driver               | Lens                                                                           | Options  |   |   |   |   |  |   |   |
| LL1-L   | 2 - 2' (18W)<br>4 - 4' (36W) | 30 - 3000K<br>40 - 4000K<br>50 - 5000K | 4 - Fully<br>Recessed | GE - Gray<br>Epoxy | 0 - None | X - Remote<br>Driver | K - Flash White<br>BTM Clear Top<br>J - Flash White<br>w/ Anti-Skid<br>Pattern | 0 - none |   |   |   |   |  |   |   |


Job Name/Date:

Fixture Type Designation:

## FIXTURE DIMENSIONS

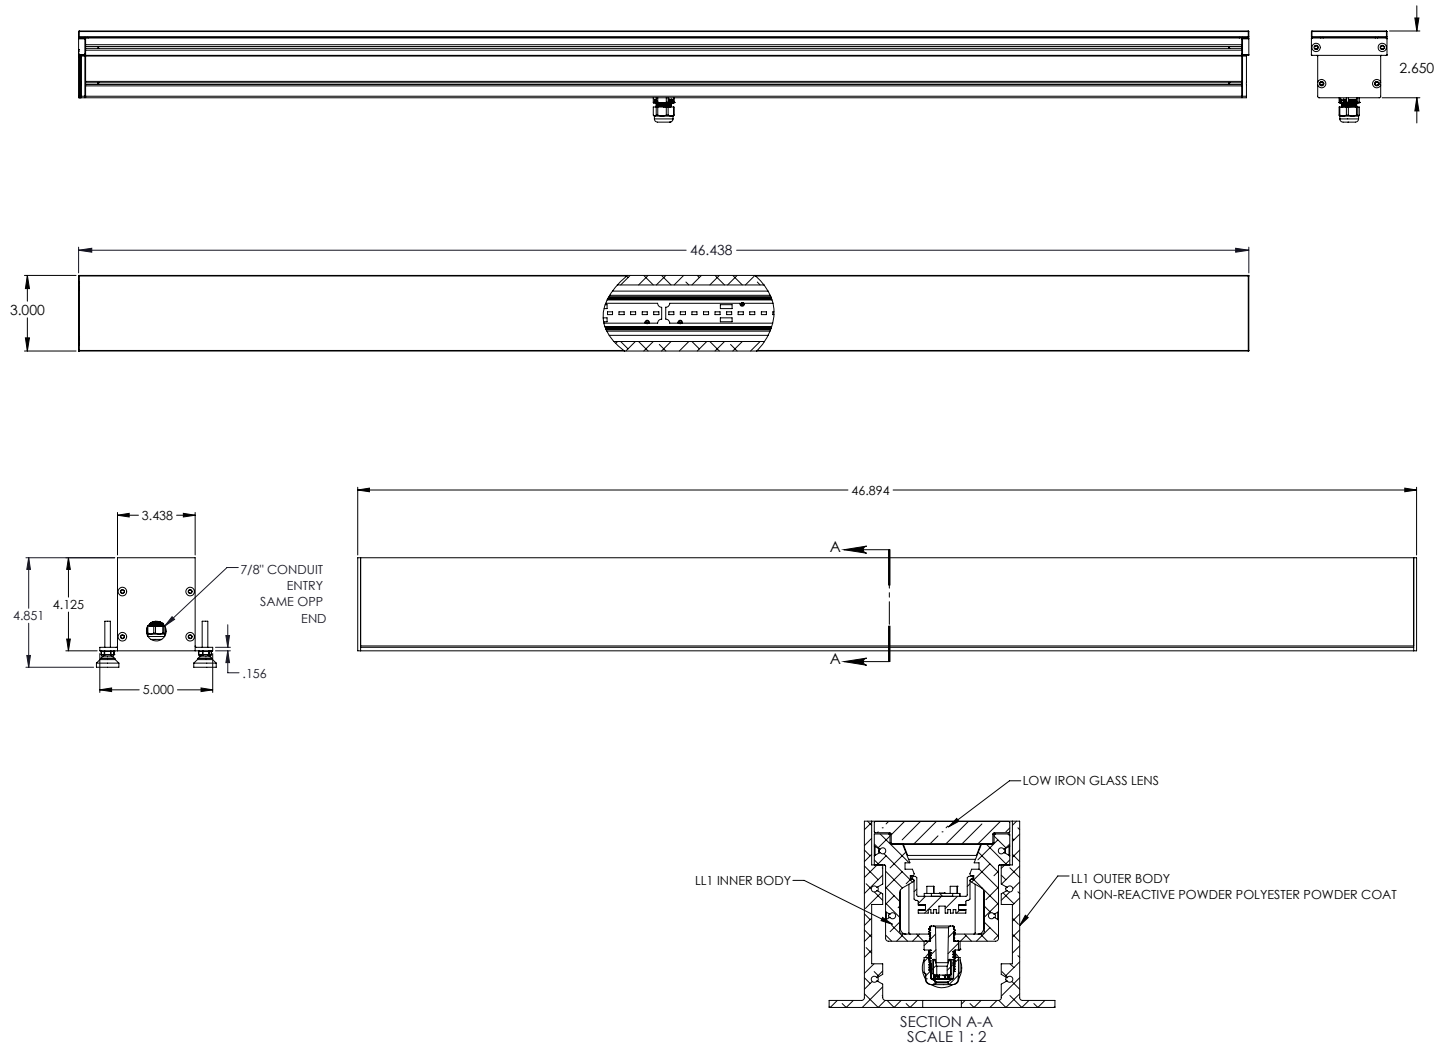

## ACCESSORIES - Installation



**LL301**  
Leveling Pad  
Set of 4

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

500mA - 2 ft. version - 18W

| Part Number                 | Description           | Input/Output                             | # of Fixtures (2 ft.) |
|-----------------------------|-----------------------|------------------------------------------|-----------------------|
| <a href="#">PPLT00465-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 500mA, 20W, Class 2, DAMP  | 1-1                   |
| <a href="#">PPLT00527</a>   | Phase Dim (120V only) | 120VAC to 500mA, 25W, Class 2, IP66      | 1-1                   |
| <a href="#">PPLT00309-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 500mA, 50W, Class 2, DAMP  | 1-1                   |
| <a href="#">PPLT00538-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 500mA, 100W, Class 2, DAMP | 1-4                   |

Suggested Lutron Compatible - 500mA - 2 ft. - 18W version

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|------------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00195</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 19W, Class 2 | 1-1           |
| <a href="#">PPLT00180</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 27W, Class 2 | 1-1           |

**SUGGESTED POWER SUPPLIES**

1000mA - 4 ft. version - 36W

| Part Number                 | Description           | Input/Output                             | # of Fixtures (4 ft.) |
|-----------------------------|-----------------------|------------------------------------------|-----------------------|
| <a href="#">PPLT00309-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 1000mA, 50W, Class 2, DAMP | 1-1                   |
| <a href="#">PPLT00467-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 1000mA, 50W, Class 2, DAMP | 1-1                   |

Suggested Lutron Compatible - 1000mA - 4 ft. - 36W version

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                       | # of Fixtures |
|---------------------------|----------------|------------|-----------|------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00519</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 1050mA, 38W, Class 2 | 1-1           |

*For other power supply options consult factory.***PHOTOMETRIC DATA***Coming Soon**Job Name/Date:**Fixture Type Designation:*