LAMBDA



datasheet

Lambda is a minimalist lighting solution that offers linear spread upper and diffused lower light emissions. Small details such as no power cord maintain the minimalistic idea without sacrificing function in the field. It is available in various lengths with multiple color temperature and finish options. Continuous runs available - see page 3.

TECHNICAL DATA

Wattage / Input	72W (4 ft), 144W (8 ft) (120-277VAC - 347VAC available)				
Power Supply	Integral (0-10V Dimming)				
Construction	Body: Extruded Aluminum Mounting: Aircraft Cable				
ССТ	2700K, 3000K, 3500K, 4000K				
CRI	>90				
Delivered Lumens	Up - 2254 lm, Down - 1692 lm (4 ft, 3000K)				
Efficacy	Up: 25.6 lm/W, Down: 25.9 lm/W				
Optics	Up: Linear Spread, Down: Diffuse				
Finishes	4 Standard, See Below.				
Fixture Dimensions	4.04" x 6.15" See page 2.				
LED Source	Mid-Power LEDs				
IP Rating	IP20				



MADE IN THE U.S.A.

Fixture Dimensions
See Drawing on page 2.

ORDERING INFORMATION

Example: LAM-L-8-30-P-10-C-SC.

Model No. Leng LAM-L 4 - 4 f 6 - 6 f 8 - 8 f	4 foot 27 - 2700K	Body P - Pendant	Finish 02 - Black Suede	Driver C - 120-277VAC.	Canopy RC - Recessed*
6 - 6 f		P - Pendant	02 - Black Suede	C - 120-277VAC.	PC Pacasad*
	35 - 3500K 40 - 4000K		18 - Textured Bronze TS - Silver 11 - White Suede 99 - Custom	0-10V Dimming 2 - 347V, 0-10V Dimming	RC - Recessed SC - Surface* RW - Recessed, White SW - Surface, White AS - Surface Acoustical Tile* AW - Surface Acoustical Tile, White * Same finish as fixture

Fixture Type Designation:

sales@designplan.com www.designplan.com

Job Name/Date:

79 Trenton Avenue, Frenchtown NJ 08825 © Copyright 2019 Designplan Lighting, Inc. Published: April 19, 2023 P: 908-996-7710 F: 908-996-7042

mounting pattern to allow direct mounting to a junction box that will hold a minimum of 50 lbs.






datasheet

FIXTURE DIMENSIONS

4 foot version

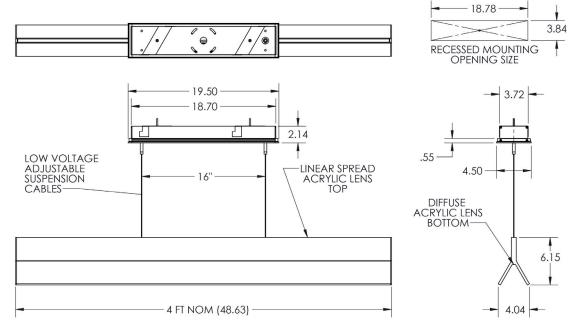

NOTES:

I. CANOPY CAN BE RECESSED IN THE CEILING OR SURFACE MOUNTED OVER J-BOX CAPABLE OF SUPPORTING MIN. 50 LB

Job Name/Date:


Fixture Type Designation:





datasheet

PHOTOMETRIC DATA



PHOTOMETRIC FILENAME: LAMBDA-PENDANT 3000K.IES

ACCESSORIES - CONNECTORS for Continuous Run



Connectors Example: LAM-C18020201

LAM	- C180	2		01
Model No.	Туре	# of Ends	Finish	Option
LAM	C180 - 180° Connector	2 - 1 connector for every 2 fixtures	02 - Black Suede18 - Textured BronzeTS - Silver11 - White Suede99 - Custom	01 - None

Job Name/Date:

Fixture Type Designation: