


Laser Micro is a skyscraper projector for outdoor installation that creates a wall washing effect on a building façade. It is available with a 5° optic and a silver finish.



TECHNICAL DATA

Wattage / Input	6W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anodized Extruded Aluminum Lens: Tempered Safety Glass Cable Length: 1.64'
CCT	3000K
BUG Rating	B0-U3-G0
Delivered Lumens	400 lm (3000K)
Efficacy	66.7 lm/W
Optics	5°
Finishes	Silver
Fixture Dimensions	4.33" l x 2.56" w x 5.12 h
LED Source	2 x 2W High Power CREE LEDs
Fixture Weight	1.8 lbs
IP Rating	IP66
IK Rating	IK07

Fixture Dimensions

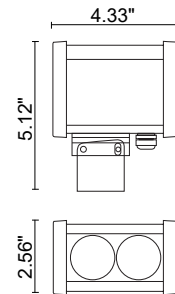

ORDERING INFORMATION

Example: 108001P-30K-05-SI. Power Supplies ordered separately.

108001P	-	30K	-	05	-	SI
Model No.		CCT		Optics		Finish
108001P		30K - 3000K		05 - 5°		SI - Silver

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-3
PPLT00155	Non-Dim	120-277VAC to 24VDC, 30W, Class 2	1-4
PPLT00156	Non-Dim	120-277VAC to 24VDC, 45W, Class 2	1-6
PPLT00157	Non-Dim	120-277VAC to 24VDC, 60W, Class 2	1-8
PPLT00143	0-10V Dimming to 10%	120-277VAC to 24VDC, 96W, Class 2, IP64	1-12
PPLT00158	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-13
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-13

For other power supply options consult factory.

PHOTOMETRIC DATA

Maximum Candela = 29926

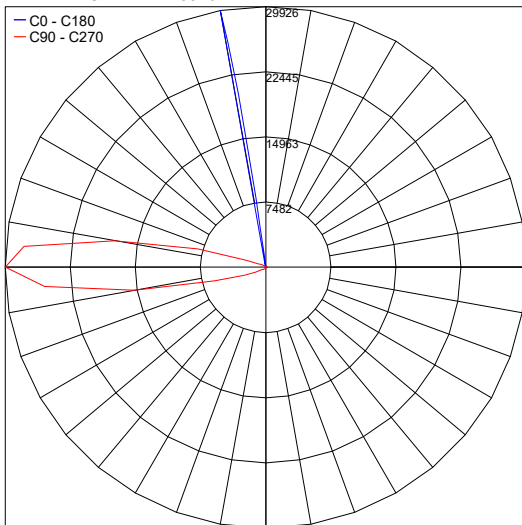

Job Name/Date:

Fixture Type Designation: