


Laser Micro is a skyscraper projector for outdoor installation that creates a wall washing effect on a building façade. It is available with a 5° optic and a silver finish.



## TECHNICAL DATA

<b>Wattage / Input</b>	6W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Anodized Extruded Aluminum Lens: Tempered Safety Glass Cable Length: 1.64'
<b>CCT</b>	3000K
<b>BUG Rating</b>	B0-U3-G0
<b>Delivered Lumens</b>	400 lm (3000K)
<b>Efficacy</b>	66.7 lm/W
<b>Optics</b>	5°
<b>Finishes</b>	Silver
<b>Fixture Dimensions</b>	4.33" l x 2.56" w x 5.12 h
<b>LED Source</b>	2 x 2W High Power CREE LEDs
<b>Fixture Weight</b>	1.8 lbs
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK07

Fixture Dimensions



## ORDERING INFORMATION

*Example: 108001P-30K-05-SI. Power Supplies ordered separately.*

108001P	-	30K	-	05	-	SI
<b>Model No.</b>		<b>CCT</b>		<b>Optics</b>		<b>Finish</b>
108001P		30K - 3000K		05 - 5°		SI - Silver

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00056</a>	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-3
<a href="#">PPLT00155</a>	Non-Dim	120-277VAC to 24VDC, 30W, Class 2	1-4
<a href="#">PPLT00586</a>	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-5
<a href="#">PPLT00156</a>	Non-Dim	120-277VAC to 24VDC, 45W, Class 2	1-6
<a href="#">PPLT00709</a>	ELV/TRIAC & 0-10V Dimming to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-12
<a href="#">PPLT00158</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-13
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-13


## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00273</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-5
<a href="#">PPLT00530</a>	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-2

For other power supply options consult factory.

## PHOTOMETRIC DATA

Maximum Candela = 29926

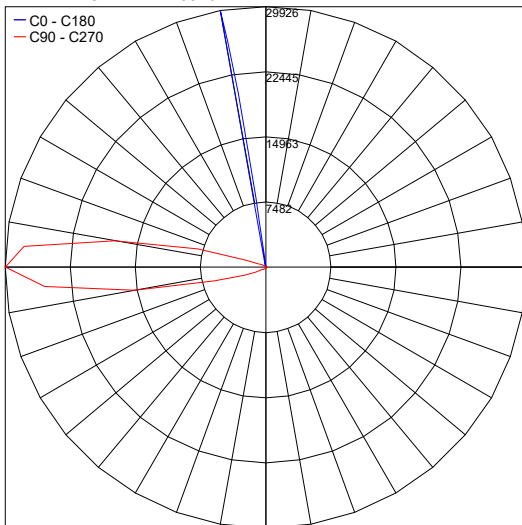

Job Name/Date:

Fixture Type Designation: