


Laser Micro is a skyscraper projector for outdoor installation that creates a wall washing effect on a building façade. It is available with a 5° optic and a silver finish.



## TECHNICAL DATA

|                           |                                                                                        |
|---------------------------|----------------------------------------------------------------------------------------|
| <b>Wattage / Input</b>    | 6W (24VDC)                                                                             |
| <b>Power Supply</b>       | Remote, not included. See page 2.                                                      |
| <b>Construction</b>       | Body: Anodized Extruded Aluminum<br>Lens: Tempered Safety Glass<br>Cable Length: 1.64' |
| <b>CCT</b>                | 3000K                                                                                  |
| <b>BUG Rating</b>         | B0-U3-G0                                                                               |
| <b>Delivered Lumens</b>   | 400 lm (3000K)                                                                         |
| <b>Efficacy</b>           | 66.7 lm/W                                                                              |
| <b>Optics</b>             | 5°                                                                                     |
| <b>Finishes</b>           | Silver                                                                                 |
| <b>Fixture Dimensions</b> | 4.33" l x 2.56" w x 5.12 h                                                             |
| <b>LED Source</b>         | 2 x 2W High Power CREE LEDs                                                            |
| <b>Fixture Weight</b>     | 1.8 lbs                                                                                |
| <b>IP Rating</b>          | IP66                                                                                   |
| <b>IK Rating</b>          | IK07                                                                                   |

Fixture Dimensions



## ORDERING INFORMATION

*Example: 108001P-30K-05-SI. Power Supplies ordered separately.*

|                  |   |             |   |               |   |               |
|------------------|---|-------------|---|---------------|---|---------------|
| 108001P          | - | 30K         | - | 05            | - | SI            |
| <b>Model No.</b> |   | <b>CCT</b>  |   | <b>Optics</b> |   | <b>Finish</b> |
| 108001P          |   | 30K - 3000K |   | 05 - 5°       |   | SI - Silver   |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

| Part Number               | Description                                             | Input/Output                       | # of Fixtures |
|---------------------------|---------------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00158</a> | Non-Dim                                                 | 120-277VAC to 24VDC, 100W, Class 2 | 1-13          |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 2-13          |

Suggested Lutron Compatible

| Part Number               | Option | Lutron SKU | Dim Range | Description                                          | Input/Output                      | # of Fixtures |
|---------------------------|--------|------------|-----------|------------------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00530</a> | L3D0   | L3D0       | 100%-0.1% | Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-2           |

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

| Part Number               | Description                         | Input/Output                                | # of Fixtures<br>6W |
|---------------------------|-------------------------------------|---------------------------------------------|---------------------|
| <a href="#">PPLT00715</a> | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-12                |

For other power supply options consult factory.

## PHOTOMETRIC DATA

Maximum Candela = 29926

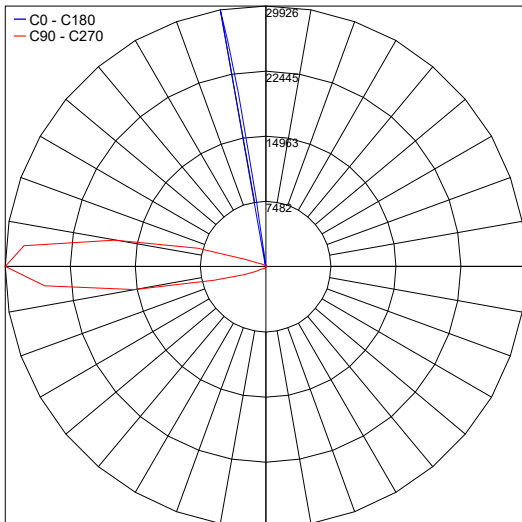

Job Name/Date:

Fixture Type Designation: